# SENECA RECESSED

Dedicated LED emergency fittings
for surface or recessed mounting

*SENECA RECESSED*
*WITH MOUNTING DISC IN POSITION*

*SENECA RECESSED*
*rear view*

IP 40 LED

## APPLICATIONS

- Corridors
- Escape routes

## CONSTRUCTION

- Moulded polycarbonate body
- Acrylic lens
- Supplied with 140mm dia mounting disc – use optional depending on the diameter of the ceiling aperture

## SPECIFICATION

- 2W, 104 lm, 52 l.lm/c.W
- 3 cell battery pack
- Non-maintained operation
- Choice of two lenses for different light distributions:
  - Wide, giving a circular distribution
  - Oval, giving an oval light distribution. (Suffix OVAL)
- Momentary manual test button fitted

## OPTIONS

- For wide (circular) light distribution, no suffix required
- For oval (corridor) light distribution, use suffix OVAL

| ORDER CODE | DESCRIPTION |
|---|---|
| NSC2/LED/REC/NM3 | SENECA 2W LED NON-MAINTAINED RECESSED |
| NSC2/LED/REC/OVAL/NM3 | SENECA 2W LED NON-MAINTAINED RECESSED OVAL DIST |
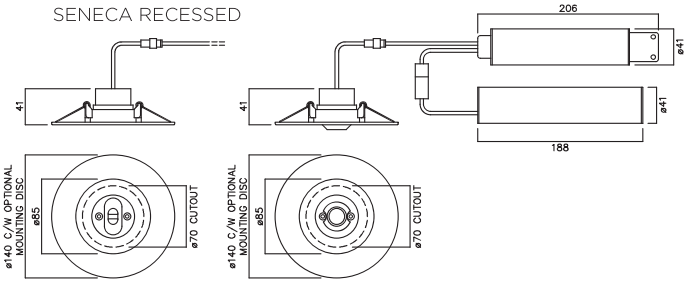
SENECA RECESSED