

# PRODUCT ENVIRONMENTAL PROFILE


## Environmental Product Declaration

### MS165/MO165 Manual Motor Starter

April 2024



MS165

REGISTRATION NUMBER ABBG-00194-V02.02-EN	IN COMPLIANCE WITH PCR-ED4-EN-2021 09 06 SUPPLEMENTED BY PSR-0005-ED3-EN-2023 06 06
VERIFIER ACCREDITATION NUMBER VH51	INFORMATION AND REFERENCE DOCUMENTS <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
DATE OF ISSUE 04-2024	VALIDITY PERIOD 5 years
INDEPENDENT VERIFICATION OF THE DECLARATION AND DATA, IN COMPLIANCE WITH ISO 14025: 2006	
INTERNAL <input type="checkbox"/>	EXTERNAL <input checked="" type="checkbox"/>
THE PCR REVIEW WAS CONDUCTED BY A PANEL OF EXPERTS CHAIRED BY JULIE ORGELET (DDEMAIN)	
PEP ARE COMPLIANT WITH XP C08-100-1 :2016 OR EN 50693:2019	
THE ELEMENTS OF THE PRESENT PEP CANNOT BE COMPARED WITH ELEMENTS FROM ANOTHER PROGRAM.	
DOCUMENT IN COMPLIANCE WITH ISO 14025: 2006 « ENVIRONMENTAL LABELS AND DECLARATIONS. TYPE III ENVIRONMENTAL DECLARATIONS »	
	
© Copyright 2022 ABB. All rights reserved.	

<b>EPD Owner</b>	ABB STOTZ-KONTAKT GmbH, Eppelheimer Strasse 82 69123 Heidelberg, Germany www.abb.com
<b>Manufacturer name and address</b>	ABB Xinhui Low Voltage Switchgear Co., Ltd. Xinhui district, Jiangmen city, Guangdong Province, 529100, P.R. China.
<b>Company contacts</b>	EPD_ELSP@in.abb.com
<b>Reference product</b>	MS165-80 Manual Motor Starter
<b>Description of the product</b>	MS165-80 range of Manual Motor Starter ensures high protection and reliable operation in critical power applications, distribution boards, switchboards, capacitor banks. A wide range of cable terminals and Snap-On ac-accessories make the installation easy and fast. MS165-80 Range can be fitted into different distribution systems by means of busbar adapters
<b>Functional unit</b>	The functional unit of this study is a single Manual Motor Starter/Motor Protection Circuit Breaker (including its packaging and accessories) to protect during 20 years the installation against overload and short circuits in circuit with assigned voltage U and rated current I <sub>n</sub> .  Up = Rated voltage (V) = 690 I <sub>th</sub> = Rated current in continuous operation (A) =80 Rated breaking capacity I <sub>cn</sub> [kA] = 6
<b>Other products covered</b>	MS165-16/MS165-16B MS165-42/MS165-42B MS165-80/MS165-80B MO165-32/MO165-32B MS165-20/MS165-20B MS165-54/MS165-54B MO165-16/MO165-16B MO165-42/MO165-42B MS165-25/MS165-25B MS165-65/MS165-65B MO165-20/MO165-20B MO165-54/MO165-54B MS165-32/MS165-32B MS165-73/MS165-73B MO165-25/MO165-25B MO165-65/MO165-65B MO165-73/MO165-73B MO165-80/MO165-80B
<b>Reference lifetime</b>	20 years
<b>Product category</b>	Electrical, Electronic and HVAC-R Products
<b>Use Scenario</b>	The use phase has been modeled based on the sales mix data (2022), and the corresponding low voltage electricity countries mix
<b>Geographical representativeness</b>	Raw materials & Manufacturing: [Global] Assembly: [China] Distribution / Use: [Global] specific sales mix EoL: [Global]
<b>Technological representativeness</b>	Materials and processes data are specific to the production of MS165-80 Manual Motor Starter
<b>LCA Study</b>	This study is based on the LCA study described in the LCA report 1SAC200246H0001
<b>EPD type</b>	Product Family Declaration
<b>EPD scope</b>	“Cradle to grave”
<b>Year of reported primary data</b>	2022
<b>LCA software</b>	SimaPro 9.5.0.1 (2023)
<b>LCI database</b>	Ecoinvent v3.9.1 (2023)
<b>LCIA methodology</b>	EN 15804:2012+A2:2019

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	2/18

# Contents

<b>ABB Purpose &amp; Embedding Sustainability</b> .....	<b>4</b>
<b>General Information</b> .....	<b>4</b>
<b>Constituent Materials</b> .....	<b>5</b>
<b>LCA background information</b> .....	<b>7</b>
Functional unit and Reference Flow .....	7
System boundaries and life cycle stages .....	7
Temporal and geographical boundaries .....	8
Boundaries in the life cycle.....	8
Data quality.....	8
Environmental impact indicators .....	8
Allocation rules.....	8
Limitations and simplifications .....	9
Energy Models.....	9
<b>Inventory analysis</b> .....	<b>10</b>
<b>Environmental impacts</b> .....	<b>13</b>
<b>Additional environmental information</b> .....	<b>17</b>
<b>References</b> .....	<b>18</b>

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	3/18



## ABB Purpose & Embedding Sustainability

ABB is a leading global technology company that energizes the transformation of society and industry to achieve a more productive, sustainable future. By connecting software to its electrification, robotics, automation and motion portfolio, ABB pushes the boundaries of technology to drive performance to new levels. With a history of excellence stretching back more than 130 years, ABB's success is driven by about 105 thousand talented employees in over 100 countries.

ABB's Electrification business offers a wide-ranging portfolio of products, digital solutions and services, from substation to socket, enabling safe, smart and sustainable electrification. Offerings encompass digital and connected innovations for low voltage and medium voltage, including EV infrastructure, solar inverters, modular substations, distribution automation, power protection, wiring accessories, switchgear, enclosures, cabling, sensing and control. ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.



## General Information

ABB Xinhui Low Voltage Switchgear Co., Ltd, located in Xinhui District, Jiangmen City, Guangdong Province, the hometown of overseas Chinese. It is a joint venture company of ABB specializing in the production of low-voltage electrical appliances in China. The company mainly produces low voltage molded case circuit breakers (Tmax XT, Tmax and Formula) for power distribution protection and control, ATS automatic transfer switch appliances, Compact/Modular series pilot devices, OT isolating switches, OS isolating switch fuses, PSR/PSTX series soft starters, EOL electronic overload relays, TOL Manual Motor Starters, A/AS/AF/AX series contactors etc. In addition to meeting the needs of domestic customers, the products are also exported to markets such as Europe and Asia.

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	4/18

## Manual Motor Starter product cluster

MS165/MO165 is a compact and powerful range for Manual Motor Starters. They offer a reliable protection in the event of overload or phase failure. This type has also a clear and reliable indication of fault in a separate window in the event of short-circuit tripping. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism, and a rotary handle with a clear switch position indication. The Manual Motor Starter is suitable for three- and single-phase applications.

- **MS165-80**

Manual Motor Starter	MS165-80
Rated voltage [V]	690
Rated current [A]	80
Number of Poles	3P

Table 1: Technical characteristics of MS165-80 Manual Motor Starter  
(Refer Technical catalogue for complete details).



## Constituent Materials

### MS165-80 Manual Motor Starter

The representative product is MS165-80 Manual Motor Starter which weighs 1.164 kg including its installed accessories, paper documentation and packaging.

MS165-80				
Materials	Name	IEC 62474 MC	[g]	%
<b>Metals</b>	Steel	M-119	363.89	31.2%
	Cu and Cu Alloys	M-121	221.30	19.0%
	Stainless Steel	M-100	14.32	1.2%
	Precious Metals	M-159	3.34	0.3%
<b>Plastics</b>	Polyamide	M-258	375.53	32.2%
	PolyButyleneTerephthalate	M-261	22.99	2.0%
	Unsaturated Polyester	M-301	11.63	1.0%
	PolyOxyMethylene	M-205	0.51	<1%
	Polycarbonate	M-254	0.50	<1%
	Polyethylene	M-251	0.40	<1%
<b>Other</b>	Polyphenylenesulfide (PPS)	M-263	0.31	<1%
	Paper/Cardboard	M-341	149.92	12.9%
<b>Total</b>			<b>1164.63</b>	<b>100.0%</b>

Table 2: Weight of materials MS165-80 Manual Motor Starter

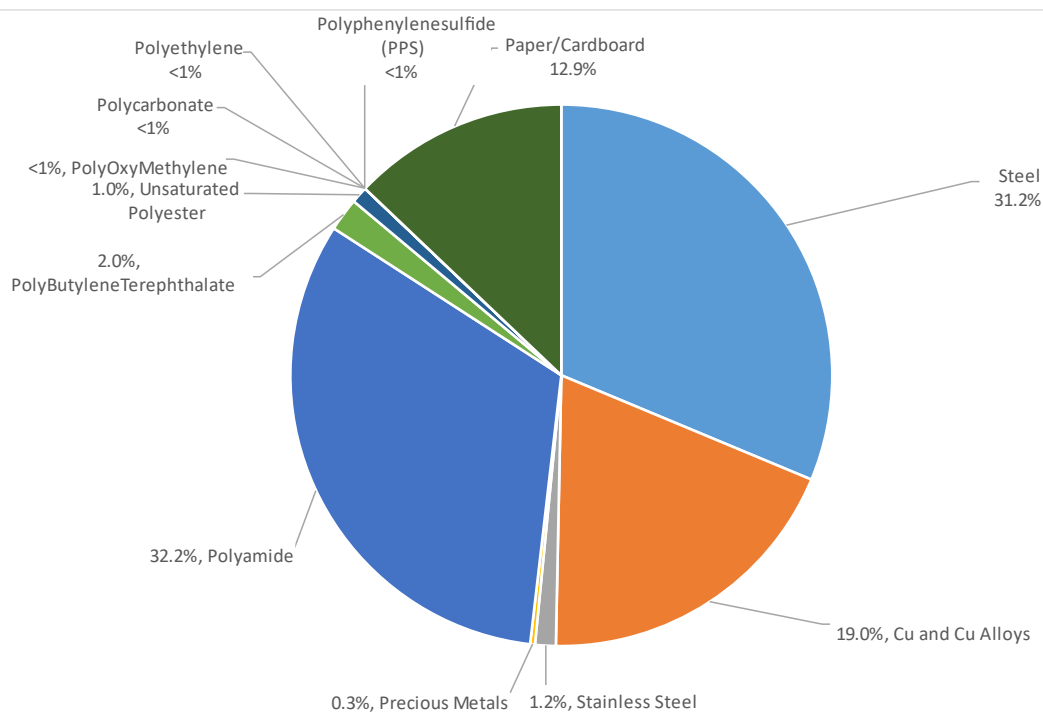


Figure 1: Composition of MS165-80 Manual Motor Starter

Packaging for reference product MS165-80 weighs 126.78 g, with the following substance composition:

Material	Unit	MS165-80
Corrugated Cardboard	g	126.78

Table 3: Weight of packaging materials MS165-80 Manual Motor Starter

No cut-off criteria have been applied to the analysis of the product and its packaging. Additional packaging for semifinished products along the supply chain haven't been considered.



# LCA background information

## Functional unit and Reference Flow

The functional unit is the reference unit used to quantify the performance of the service delivered by a product to the user. The main purpose of the functional unit is to provide a reference to which inputs and outputs are related in the LCA.

The functional unit of this study is a single Manual Motor Starter/Motor Protection Circuit Breaker (including its packaging and accessories) to protect during 20 years the installation against overload and short circuits in circuit with assigned voltage  $U$  and rated current  $I_n$ .

Manual Motor Starter	MS165-80
$U_p$ = Rated Operational voltage (V)	690
$I_p$ = Rated Operational Current (A)	80
Number of Poles	3

Table 4: Functional unit MS165-80 Manual Motor Starter

The Reference Flow of the study is a MS165-80 Manual Motor Starter (including its packaging and accessories) with mass described in chapter 1.3, table 2 & 3.

## System boundaries and life cycle stages

The life cycle of the Manual Motor Starter, an EEPS (Electronic and Electrical Products and Systems), is a “from cradle to grave” analysis and covers the following main life cycle stages: manufacturing, including the relevant acquisition of raw material, preparation of semi-finished goods, etc. and processing steps; distribution; installation, including the relevant steps for the preparation of the product for use; use including the required maintenance steps within the RSL (reference service life of the product) associated to the reference product; end-of-life stage, including the necessary steps until final disposal or recovery of the product system.

The following table shows the stages of the product life cycle and the information stages according to EN 50693:2019 [3] for the evaluation of electronic and electrical products and systems.

Manufacturing	Distribution	Installation	Use	End-of-Life (EoL)
Acquisition of raw materials		Installation		Deinstallation
Transport to manufacturing site	Transport to distributor/ logistic center	EoL treatment of generated waste (packaging)	Usage	Collection and transport
Components/parts manufacturing	Transport to place of use		Maintenance	EoL treatment
Assembly				
Packaging				
EoL treatment of generated waste				

Table 5: Phases for the evaluation of construction products according to EN50693:2019 [3].

## Temporal and geographical boundaries

The ABB component suppliers are sourced all over the world. All primary data collected are from 2022, which is a representative production year. Secondary data are also representative for this year, as provided by ecoinvent [6].

The selected ecoinvent [6] processes in the LCA model have a global representativeness, due to the unclear origin of each component. In this way, a conservative approach has been adopted.

## Boundaries in the life cycle

As indicated in the PCR capital goods such as buildings, machinery, tools and infrastructure, the packaging for internal transport which cannot be allocated directly to the production of the reference product, may be excluded from the system boundary.

Infrastructures, when present, such as processes deriving from the ecoinvent [6] database have not been excluded.

## Data quality

In this PEP, both primary and secondary data are used. Site specific foreground data have been provided by ABB. Main data sources are the bill of materials & drawings which are available on the ERP (SAP) & Windchill. For all processes for which primary are not available, generic data originating from the ecoinvent database [6], allocation cut-off by classification, are used. The ecoinvent database available in the SimaPro software [7] is used for the calculations.

The data quality characterized by quantitative and qualitative aspects, is presented in Appendix 1. Each data quality parameter has been rated according to DQR tables from Chapter 7.19.2.2 of the Product Environmental Footprint Guide v.6.3 to give an indication of geography, technology, and temporal representativeness.

## Environmental impact indicators

The information obtained from the inventory analysis is aggregated according to the effects related to the various environmental issues. According to “PCR-ed4-EN-2021 09 06” and EN 50693 [3] the environmental impact indicators must be determined using the characterization factors and impact assessment methods specified in EN 15804:2012+A2:2019 [8].

PCR-ed4-EN-2021 09 06 and the EN 50693:2019 [3] standard establish four indicators for climate change: Climate change (total) which includes all greenhouse gases; Climate change (fossil fuels); Climate change (biogenic) which includes the emissions and absorption of biogenic carbon dioxide and biogenic carbon stored in the product; Climate change (land use) - land use and land use transformation. Other indicators as per the PCR[1].

## Allocation rules

Allocation coefficients are based on the labor hours required to produce one MS165-80 Manual Motor Starter. Total electrical energy consumption for the year 2022 is divided by total labor hours in the year 2022 to calculate average per hour energy consumption of the total factory.

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	8/18



## Limitations and simplifications

Raw materials life cycle stage includes the extraction of raw materials as well as the transport distances to the manufacturing suppliers. These distances are assumed to be 1000 km assuming no specific data available (PCR-ed4-EN-2021\_09\_06, ch 2.5.3). This distance has been added to the one already included in the market processes used for the model, as a result of a conservative choice made by the LCA operators.

Surface treatments like galvanizing, silver plating as well as their related transport processes (back and forth from the finishing suppliers) have been considered in the LCA model. Scraps for metal working and plastic processes are included when already defined in Ecoinvent [6].

The only limitations and simplifications applied to this study are listed in the following table.

Category	Description
Packaging	An average packaging content of 5% of the mass of the reference equipment has been considered as follow- Wood 50%, Cardboard 40%, Low density polyethylene 10%.
Tranports	Specific transport parameters along the entire supply chain of the reference products have been considered as representative for all the products covered by the study
MU Emissions	Impacts related to the production, transportation and installation of capital goods (buildings, infrastructure, machinery, internal transport packaging) and general operations (staff travel, marketing and communication actions) that cannot be directly allocated to products are excluded from the LCA study.

Table 6: Limitation and simplification used in each LCA stage

## Energy Models

LCA Stage	EN 15804:2012 +A2:2019 module	Energy model	Notes
Raw material extraction and processing	A1-A2	Electricity, {GLO}  market group for   Cut-off/ Electricity, {RoW}  market group for   Cut-off	Based on materials and supplier's locations
Manufacturing	A3	ABB Green Mix Low Voltage	Specific Energy model for ABB Xinhui, China manufacturing plant, 100% renewable
Installation (Packaging EoL)	A5	Electricity, {GLO}  market group for   Cut-off	
Use Stage	B1	Electricity, [country]x   market for   Cut-off, S	Low voltage, based on 2022 country sales mix
EoL	C1-C4	Electricity, {GLO}  market group for   Cut-off	

Table 7: Energy models used in each LCA stage

\*\* Please refer the use phase for further description



## Inventory analysis

In this PEP, both primary and secondary data are used. Site specific foreground data have been provided by ABB. For data collection, Bills of Material (BOM) extracted from ABB's internal SAP and Windchill ERP were used. They are a list of all the components and assemblies that constitute the finished product, organized by hierarchy level. Each item is matched with its code, quantity, weight and supplier. The BOMs were then processed, adding material, surface area, volume and weight data, taken from technical drawings/datasheets. Finally, the manufacturing process and surface treatment were assigned, according to information provided by R&D personnel. Road distances between the suppliers and ABB were calculated using Google Maps, and marine distances using Distances & Time (Searates).

All primary data collected from ABB are from 2022, which was a representative production year. Theecoinvent cut-off by classification system processes [6] are used to represent the LCA model

To improve both the inventory and modelling phase of the product, a specific modular dataset framework has been adopted. Raw materials and Manufacturing processes datasets from Ecoinvent database [6] have been clustered and listed inside two distinct mater data tables ABB Raw Materials and ABB Materials & Processes. Data used in the analysis is not older than 10 years.

### Manufacturing stage

MS165/MO165 Manual Motor Starters are composed of a multitude of components, all of which are made from of numerous materials. Most of the inputs to the products' manufacturing stage are already produced component parts.

All the MS165/MO165 Manual Motor Starters components have been modelled according to their specific raw materials and manufacturing processes.

The single use packaging as well as paper documentation are also included in the analysis in the manufacturing stage. ABB receives packaged product from supplier, sorts, repacks and delivers to the customer according to the orders.

Most of the inputs to the products' manufacturing stage are already produced component parts from the supply chain.

The entire supplier's network has been modelled with the calculation of each transportation stage, from the first manufacturing supplier to the next.

All the distances from the last subassembly suppliers' factories to the ABB facility have been calculated.

The complete energy mix has been modeled considering the GO on energy origins provided to ABB for the year 2022.

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	10/18

## Distribution

The transport distances from ABB manufacturing plant to the distribution centers (regional distribution centers / local sales organizations) have been calculated considering the specific 2022 sales mix data for MS165/MO165 Manual Motor Starter cluster (SAP ERP sales data as a source). An additional Considered 1000km additional distance as per the PSR.

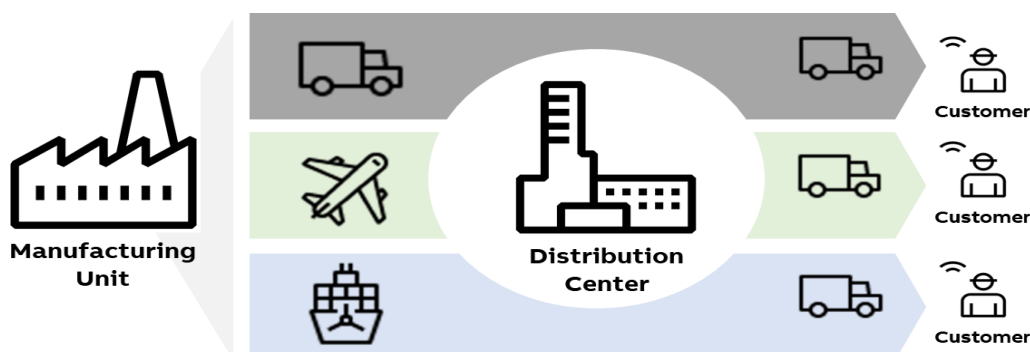


Figure 2: Distribution methodology.

## Installation

The installation phase only implies manual activities, and no energy is consumed. This phase also includes the disposal of the packaging of the MS165/MO165 Manual Motor Starters.

For the disposal of the packaging after installation of the product at the end of its life, a transport distance of 1000 km (according to PCR [1]) was assumed.

The actual disposal site is unknown and is managed by the customer. The disposal scenario of the packaging was calculated based on the latest China average data for 2022 available.

## Use

Use and maintenance are modelled according to the PCR [1].

During the use phase, MS165/MO165 Manual Motor Starters dissipate some electricity due to power losses. They are calculated according to the data provided in the catalogue of the MS165/MO165 Manual Motor Starters and following the PCR [1] & PSR [2] rules:

Parameters		
lu	[A]	80
lu	[%]	50
h/year	[h]	8760
RSL	[years]	20
Time operating coefficient	[%]	30

Table 8: Use phase parameters

The formula for the calculation of the electricity consumed is shown below and it is described as follows, where  $P_{use}$  is the power consumed by the switch at a given value of current:

$$E_{use} \text{ [kWh]} = \frac{P_{use} * 8760 * RSL * \alpha}{1000}$$

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	11/18

The above calculations have been performed according to the number of poles (3) on which relevant current flows during use phase.

The Energy model used for this phase has been modeled based on the 2022 actual sales mix data (SAP ERP sales data as a source). From Ecoinvent [6] database, the low voltage electricity country mix for each country<sub>(x)</sub> has been selected with its respective percentage on the total sales mix (Electricity, low voltage [CN] | market for | Cut-off, S).

Since no maintenance happens during the use phase, the environmental impacts linked to this procedure have been considered as null in the analysis.

### **End of life**

The end-of-life stage is modelled according to PCR [1] and IEC/TR 62635 [9]. The percentages for end-of-life treatments of materials are taken from IEC/TR 62635 [9].

Since no specific data is available, the transport distances from the place of use to the place of disposal are assumed to be 1000 km (local/domestic transport by lorry, according to PCR [1]).

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	12/18



## Environmental impacts

The following table show the environmental impact indicators of the life cycle of a single MS165-80 Manual Motor Starter, as indicated by PCR [1] and EN 50693:2019 [3]. The indicators are divided into the contribution of the processes to the different stages (manufacturing, distribution, installation, use and end-of-life).

Impact category	Unit	Total	Manuf	Distr	Install	Use	EoL
GWP-total	kg CO2 eq	2.99E+02	8.14E+00	5.87E+00	2.13E-01	2.85E+02	3.08E-01
GWP-fossil	kg CO2 eq	2.92E+02	8.17E+00	5.86E+00	1.23E-01	2.77E+02	2.96E-01
GWP-biogenic	kg CO2 eq	6.54E+00	-4.06E-02	1.24E-03	9.02E-02	6.48E+00	1.13E-02
GWP-luluc	kg CO2 eq	8.89E-01	9.29E-03	5.11E-04	5.98E-05	8.79E-01	2.70E-04
ODP	kg CFC11-eq	2.72E-06	4.33E-07	9.03E-08	2.02E-09	2.20E-06	2.59E-09
AP	mol H+ eq	1.52E+00	1.21E-01	2.51E-02	5.32E-04	1.37E+00	1.56E-03
EP-freshwater	kg P eq	1.62E-01	1.03E-02	8.88E-05	9.83E-06	1.51E-01	7.08E-05
EP-marine	kg N eq	2.85E-01	1.55E-02	1.02E-02	1.98E-04	2.59E-01	4.65E-04
EP-terrestrial	mol N eq	2.86E+00	1.57E-01	1.09E-01	2.10E-03	2.59E+00	3.67E-03
POCP	kg NMVOC eq	8.63E-01	4.58E-02	3.43E-02	7.47E-04	7.81E-01	1.21E-03
ADP-m&m	kg Sb eq	4.63E-03	2.84E-03	1.48E-06	3.24E-07	1.79E-03	3.49E-07
ADP-fossil	MJ	3.68E+03	1.07E+02	7.65E+01	1.74E+00	3.50E+03	3.39E+00
WDP	m3 of equiv. depriv.	7.60E+01	4.72E+00	1.34E-01	1.08E-02	7.12E+01	2.76E-02
PENRE	MJ	3.67E+03	9.77E+01	7.65E+01	1.74E+00	3.50E+03	3.39E+00
PENRM	MJ	9.41E+00	9.41E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	3.68E+03	1.07E+02	7.65E+01	1.74E+00	3.50E+03	3.39E+00
PERE	MJ	7.09E+02	1.19E+01	2.66E-01	2.24E-02	6.96E+02	2.61E-01
PERM	MJ	1.50E+00	1.50E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	7.10E+02	1.34E+01	2.66E-01	2.24E-02	6.96E+02	2.61E-01
SM	kg	3.10E-01	3.10E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PET	MJ	4.39E+03	1.21E+02	7.67E+01	1.76E+00	4.19E+03	3.65E+00
FW	m3	2.63E+00	1.23E-01	4.77E-03	3.44E-04	2.50E+00	1.04E-03
HWD	kg	9.35E-03	1.97E-03	5.17E-04	1.10E-05	6.83E-03	1.27E-05
N-HWD	kg	2.27E+01	1.55E+00	2.08E-01	1.52E-01	2.05E+01	2.30E-01
RWD	kg	8.74E-03	1.07E-04	5.55E-06	3.84E-07	8.63E-03	3.69E-06
CfR	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MfR	kg	1.17E+00	1.56E-01	0.00E+00	6.97E-02	0.00E+00	9.46E-01
MfER	kg	6.49E-02	0.00E+00	0.00E+00	5.71E-02	0.00E+00	7.82E-03
EN	MJ by energy vector	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Efp	disease inc.	1.18E-05	6.16E-07	6.56E-08	1.23E-08	1.11E-05	2.69E-08
IrHH	kBq U-235 eq	3.64E+01	4.30E-01	2.51E-02	1.61E-03	3.59E+01	1.50E-02
ETX FW	CTUe	7.34E+02	1.67E+02	3.94E+01	1.10E+00	5.25E+02	1.28E+00
HTX CE	CTUh	1.10E-07	2.34E-08	6.48E-10	5.63E-11	8.56E-08	3.48E-10
HTX N-CE	CTUh	5.38E-06	1.30E-06	7.15E-08	1.88E-09	3.99E-06	2.08E-08
IrLS	Pt						

Table 9: Impact indicators for MS165-80 Manual Motor Starter

Impact category	Unit	MS165-80
Biogenic Carbon content of the product	kg	0.01
Biogenic Carbon content of the associated packaging	kg	0.036

Table 10: Inventory flow other indicators

### Environmental impact indicators

GWP-total	Global Warming Potential total (Climate change)
GWP-fossil	Global Warming Potential fossil
GWP-biogenic	Global Warming Potential biogenic
GWP-luluc	Global Warming Potential land use and land use change
ODP	Depletion potential of the stratospheric ozone layer
AP	Acidification potential
EP-freshwater	Eutrophication potential - freshwater compartment
EP-marine	Eutrophication potential - fraction of nutrients reaching marine end compartment
EP-terrestrial	Eutrophication potential -Accumulated Exceedance
POCP	Formation potential of tropospheric ozone
ADP-m&m	Abiotic Depletion for non-fossil resources potential
ADP-fossil	Abiotic Depletion for fossil resources potential
WDP	Water deprivation potential

### Resource use indicators

PERE	Use of renewable primary energy excluding renewable primary energy resources used as raw material
PERM	Use of renewable primary energy resources used as raw material
PERT	Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)
PENRE	Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw material
PNERM	Use of non-renewable primary energy resources used as raw material
PENRT	Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)
PET	Total use of primary energy in the lifecycle

### Secondary materials, water and energy resources

SM	Use of secondary materials
RSF	Use of renewable secondary fuels
NRSF	Use of non-renewable secondary fuels
FW	FW: Net use of fresh water

### Waste category indicators

HWD	Hazardous waste disposed
N-HWD	Non-hazardous waste disposed
RWD	Radioactive waste disposed

### Output flow indicators

CfR	Components for reuse
MfR	Materials for recycling
MfER	Materials for energy recovery
EN	Exported energy

## Other indicators

Efp	Emissions of Fine particles
IrHH	Ionizing radiation, human health
ETX FW	Ecotoxicity, freshwater
HTX CE	Human toxicity, carcinogenic effects
HTX N-CE	Human toxicity, non-carcinogenic effects
IrLS	Impact related to Land use / soil quality

## Extrapolation for Homogeneous environmental family

This PEP covers different build configurations than representative product. All the analyzed configurations have the same main functionality, product standards and manufacturing technology.

The different life cycle stages can be extrapolated to other products of the same homogeneous environmental family by applying a rule of proportionality to the parameters in the following tables, divided by different life cycle stages.

### LCA Phase: Manufacturing

Product	GWP-total	GWP-fossil	GWP-biogenic	GWP-luluc	ODP	AP	EP-freshwater	EP-marine	EP-terrestrial	POCP	ADP-minerals & metals	ADP-fossil	WDP
MS165-16/MS165-16B	1.03	1.02	0.74	1.02	1.01	0.97	0.98	1.01	1.01	1.01	1.01	1.02	0.99
MS165-20/MS165-20B	0.99	0.99	0.99	0.99	1.00	0.97	0.99	1.00	0.99	0.99	1.01	0.99	0.99
MS165-25/MS165-25B	0.99	0.99	1.00	0.99	1.00	0.98	1.00	0.99	0.99	0.99	1.02	0.99	0.99
MS165-32/MS165-32B	1.00	1.00	1.00	1.00	1.00	1.00	1.01	1.00	1.00	1.00	1.02	1.00	1.00
MS165-42/MS165-42B	0.99	0.99	1.01	0.99	1.00	0.97	0.98	0.99	0.99	0.99	1.01	0.99	0.98
MS165-54/MS165-54B	0.97	0.98	1.00	0.98	1.00	0.98	0.99	0.98	0.98	0.98	0.99	0.98	0.97
MS165-65/MS165-65B	0.99	0.99	1.00	1.00	1.00	1.03	1.03	1.00	1.01	1.01	1.02	0.99	0.99
MS165-73/MS165-73B	1.01	1.01	0.99	1.02	1.00	1.06	1.05	1.02	1.03	1.03	1.03	1.01	1.02
MS165-80/MS165-80B	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MO165-16/MO165-16B	1.02	1.02	0.75	1.02	1.01	0.97	0.98	1.01	1.00	1.01	1.01	1.02	0.99
MO165-20/MO165-20B	0.99	0.99	1.00	0.99	1.00	0.97	0.99	0.99	0.99	0.99	1.01	0.99	0.99
MO165-25/MO165-25B	0.98	0.98	1.01	0.99	0.99	0.98	0.99	0.99	0.99	0.99	1.02	0.99	0.99
MO165-32/MO165-32B	0.99	0.99	1.01	0.99	1.00	0.99	1.00	1.00	1.00	1.00	1.02	0.99	0.99
MO165-42/MO165-42B	0.99	0.99	1.02	0.98	1.00	0.96	0.98	0.99	0.99	0.98	1.01	0.99	0.98
MO165-54/MO165-54B	0.99	0.99	1.02	0.99	1.00	0.99	1.00	1.00	1.00	1.00	1.02	0.99	0.99
MO165-65/MO165-65B	1.00	1.00	1.02	1.01	1.00	1.04	1.04	1.02	1.03	1.02	1.05	1.00	1.01
MO165-73/MO165-73B	1.01	1.01	0.99	1.02	1.00	1.06	1.06	1.03	1.04	1.03	1.06	1.01	1.02
MO165-80/MO165-80B	1.00	1.00	1.00	1.01	1.00	1.00	1.01	1.01	1.01	1.01	1.03	1.00	1.00

Table 11: Extrapolation factors for Manufacturing stage

Reference product: MS165-80 Manual Motor Starter

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	15/18

### LCA Phase: Distribution

Product	Factors
MS165-16/MS165-16B	1.03
MS165-20/MS165-20B	0.98
MS165-25/MS165-25B	0.98
MS165-32/MS165-32B	0.99
MS165-42/MS165-42B	0.98
MS165-54/MS165-54B	0.98
MS165-65/MS165-65B	0.99
MS165-73/MS165-73B	1.00
MS165-80/MS165-80B	1.00
MO165-16/MO165-16B	1.03
MO165-20/MO165-20B	0.98
MO165-25/MO165-25B	0.98
MO165-32/MO165-32B	0.98
MO165-42/MO165-42B	0.98
MO165-54/MO165-54B	0.98
MO165-65/MO165-65B	1.00
MO165-73/MO165-73B	1.00
MO165-80/MO165-80B	1.00

Table 12: Extrapolation factors for Distribution stage  
Reference product: MS165-80 Manual Motor Starter

### LCA Phase: Installation

Installation phase impacts are common across all variants of the Manual Motor Starters.

### LCA Phase: Use

Products	I [A]	LCA Phase	Factors
MS165-16/MS165-16B	16	Use	0.35
MS165-20/MS165-20B	20		0.34
MS165-25/MS165-25B	25		0.33
MS165-32/MS165-32B	32		0.40
MS165-42/MS165-42B	42		0.50
MS165-54/MS165-54B	54		0.64
MS165-65/MS165-65B	65		0.74
MS165-73/MS165-73B	73		0.88
MS165-80/MS165-80B	80		1.00
MO165-16/MO165-16B	16		0.35
MO165-20/MO165-20B	20		0.34
MO165-25/MO165-25B	25		0.33
MO165-32/MO165-32B	32		0.40
MO165-42/MO165-42B	42		0.50
MO165-54/MO165-54B	54		0.64
MO165-65/MO165-65B	65		0.74
MO165-73/MO165-73B	73		0.88
MO165-80/MO165-80B	80		1.00

Table 13: Extrapolation factors for Use phase  
Reference product: MS165-80 Manual Motor Starter



### LCA Phase: End of Life

Product	GWP-total	GWP-fossil	GWP-biogenic	GWP-luluc	ODP	AP	EP-freshwater	EP-marine	EP-terrestrial	POCP	ADP-minerals & metals	ADP-fossil	WDP
MS165-16/MS165-16B	0.98	0.98	0.97	0.96	1.01	0.96	0.95	0.99	0.99	0.99	1.02	0.98	0.97
MS165-20/MS165-20B	0.96	0.96	0.98	0.96	0.97	0.96	0.95	0.97	0.96	0.97	0.97	0.96	0.96
MS165-25/MS165-25B	0.98	0.98	0.98	0.97	0.98	0.97	0.97	0.98	0.98	0.98	0.98	0.97	0.97
MS165-32/MS165-32B	0.98	0.98	0.99	0.98	0.98	0.98	0.98	0.99	0.98	0.98	0.99	0.98	0.98
MS165-42/MS165-42B	0.96	0.96	0.99	0.95	0.97	0.95	0.94	0.97	0.96	0.96	0.97	0.96	0.95
MS165-54/MS165-54B	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.97	0.98	0.98
MS165-65/MS165-65B	1.02	1.02	1.01	1.03	1.00	1.02	1.04	1.01	1.01	1.01	1.00	1.02	1.02
MS165-73/MS165-73B	1.03	1.03	1.02	1.05	1.02	1.04	1.05	1.02	1.03	1.02	1.01	1.03	1.04
MS165-80/MS165-80B	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MO165-16/MO165-16B	0.97	0.97	0.97	0.95	1.00	0.96	0.94	0.99	0.99	0.99	1.02	0.98	0.97
MO165-20/MO165-20B	0.96	0.96	0.98	0.95	0.97	0.95	0.95	0.97	0.96	0.96	0.97	0.96	0.96
MO165-25/MO165-25B	0.97	0.97	0.98	0.97	0.98	0.97	0.97	0.98	0.97	0.97	0.98	0.97	0.97
MO165-32/MO165-32B	0.98	0.98	0.99	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
MO165-42/MO165-42B	0.96	0.95	0.98	0.95	0.96	0.95	0.94	0.96	0.96	0.96	0.97	0.95	0.95
MO165-54/MO165-54B	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
MO165-65/MO165-65B	1.02	1.02	1.01	1.03	1.01	1.03	1.04	1.01	1.02	1.01	1.00	1.02	1.03
MO165-73/MO165-73B	1.03	1.03	1.02	1.05	1.02	1.04	1.05	1.02	1.03	1.02	1.01	1.03	1.04
MO165-80/MO165-80B	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Table 14: Extrapolation factors for EOL Phase

Reference product: MS165-80 Manual Motor Starter



## Additional environmental information

According to the waste treatment scenario calculation in Simapro [7], based on the recycling rate in the technical report IEC/TR 62635 Edition 1.0 [9] Table D.6, the following recyclability potentials were calculated. The recyclability potential is calculated based on the product weight (excluding packaging).

	MS165-80
Recyclability potential	93.1%

Table 15: Recyclability potential of MS165-80 Manual Motor Starter

## References

- [1] PCR “PEP-PCR-ed4-EN-2021\_09\_06” - Product Category Rules for Electrical, Electronic and HVAC-R Products (published: 6<sup>th</sup> September 2021)
- [2] PSR “PSR-0005-ed3-EN-2023 06 06” - SPECIFIC RULES FOR Electrical switchgear and control gear Solutions
- [3] EN 50693:2019 - Product category rules for life cycle assessments of electronic and electrical products and systems
- [4] ISO 14040:2006 - Environmental management -Life cycle assessment - Principles and framework
- [5] ISO 14044:2006 - Environmental management - Life cycle assessment - Requirements and guidelines
- [6] ecoinvent v3.9.1 (2023). ecoinvent database version 3.8 - (<https://ecoinvent.org/>)
- [7] SimaPro Software version 9.5.0.1 - PRé Sustainability
- [8] UNI EN 15804:2012+A2:2019: Sustainability of constructions - Environmental product declarations (September 2019).
- [9] IEC/TR 62635 - Guidelines for end-of-life information provided by manufacturers and recyclers and for recyclability rate calculation of electrical and electronic equipment - Edition 1.0 2012-10
- [10] <https://www.ecosystemspa.com/>
- [11] 1SAC200248H0001\_Manual Motor Starter MS165-80\_BOM\_Process
- [12] 1SAC200247H0001\_Manual Motor Starter MS165-80\_LCA Data

STATUS	SECURITY LEVEL	PEP ECOPASSPORT REG. NUMBER	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	ABBG-00194-V02.02-EN	1SAC200253H0001	B.004	en	18/18