

DS1-X FOR ET 200S ELECTROMECHANICS LINE STARTER  
EXPANDABLE ADJUSTABLE RANGE 0.35...0.50A AC-3, 0.12  
KW/400V FOR BRAKE CONTROL MODULE



Figure similar

Product brand name	Sirius
Product designation	motor starter ET 200S
Design of the product	direct starter

General technical data	
Product function	
• on-site operation	Yes
Power loss [W] typical	10 W
Insulation voltage	
• rated value	500 V
Degree of pollution	3 at 400 V, 2 at 500 V according to IEC60664 (IEC61131)
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	400 V
Protection class IP	IP20
Shock resistance	5g / 11 ms
Vibration resistance	2g
Operating frequency maximum	750 1/h

<b>Mechanical service life (switching cycles)</b>	
• of the main contacts typical	100 000
<b>Type of assignment</b>	2
<b>Equipment marking</b>	
• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	A
• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q
<b>Product function</b>	
• direct start	Yes
• reverse starting	No
<b>Product component Motor brake output</b>	Yes
<b>Product feature</b>	
• brake control with 230 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
<b>Product extension braking module for brake control</b>	Yes
<b>Product function Short circuit protection</b>	Yes
<b>Design of short-circuit protection</b>	circuit-breakers
<b>Trip class</b>	CLASS 10
<b>Maximum short-circuit current breaking capacity (Icu)</b>	
• at 400 V rated value	50 kA

### Electromagnetic compatibility

<b>EMC emitted interference</b>	
• acc. to IEC 60947-1	CISPR11, ambience A (industrial sector)
<b>EMI immunity acc. to IEC 60947-1</b>	corresponds to degree of severity 3, ambience A (industrial sector)
<b>Conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	2 kV on voltage supply, inputs and outputs
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV (U > 24 V DC)
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV (U > 24 V DC)
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	80 MHz ... 1 GHz 10 V/m, 1.4 GHz ... 2 Hz 3 V/m, 2 GHz ... 2.7 GHz 1 V/m

### Safety related data

<b>B10 value</b>	
• with high demand rate acc. to SN 31920	1 000 000
<b>Proportion of dangerous failures</b>	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	75 %

<b>Failure rate [FIT]</b>	
<ul style="list-style-type: none"> <li>with low demand rate acc. to SN 31920</li> </ul>	100 FIT
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>Protection against electrical shock</b>	finger-safe

### Inputs/ Outputs

<b>Product function</b>	
<ul style="list-style-type: none"> <li>digital inputs parameterizable</li> </ul>	No
<ul style="list-style-type: none"> <li>digital outputs parameterizable</li> </ul>	No
<b>Number of digital inputs</b>	0
<b>Number of sockets</b>	
<ul style="list-style-type: none"> <li>for digital output signals</li> </ul>	0
<ul style="list-style-type: none"> <li>for digital input signals</li> </ul>	0

### Main circuit

<b>Number of poles for main current circuit</b>	3
<b>Design of the switching contact</b>	electromechanical
<b>Adjustable pick-up value of the current-dependent overload release</b>	0.35 ... 0.5 A
<b>Type of the motor protection</b>	bimetal
<b>Operating voltage</b>	
<ul style="list-style-type: none"> <li>rated value</li> </ul>	200 ... 400 V
<b>Operating frequency 1 rated value</b>	50 Hz
<b>Operating frequency 2 rated value</b>	60 Hz
<b>Operating range relative to the operating voltage at AC</b>	
<ul style="list-style-type: none"> <li>at 50 Hz</li> </ul>	200 ... 440 V
<b>Operating power</b>	
<ul style="list-style-type: none"> <li>at AC-3</li> </ul>	
<ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul>	0.12 kW
<b>Operating power for three-phase motors at 400 V at 50 Hz</b>	0.12 ... 0.12 kW

### Supply voltage

<b>Type of voltage of the supply voltage</b>	DC
<b>Supply voltage 1 at DC</b>	24 ... 24 V
<b>Supply voltage 1 at DC rated value</b>	
<ul style="list-style-type: none"> <li>minimum permissible</li> </ul>	20.4 V
<ul style="list-style-type: none"> <li>maximum permissible</li> </ul>	28.8 V

### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	DC
<b>Control supply voltage at DC</b>	
<ul style="list-style-type: none"> <li>rated value</li> </ul>	20.4 ... 28.8 V
<b>Control supply voltage 1</b>	

<ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>	20.4 ... 28.8 V
<ul style="list-style-type: none"> <li>• at DC</li> </ul>	24 ... 24 V
<b>Power loss [W] in auxiliary and control circuit</b>	
<ul style="list-style-type: none"> <li>• <b>in switching state OFF</b> <ul style="list-style-type: none"> <li>— with bypass circuit</li> <li>— without bypass circuit</li> </ul> </li> </ul>	0.3744 W 0.374 W
<ul style="list-style-type: none"> <li>• <b>in switching state ON</b> <ul style="list-style-type: none"> <li>— with bypass circuit</li> <li>— without bypass circuit</li> </ul> </li> </ul>	4.1184 W 4.118 W

### Power Electronics

<b>Relative negative tolerance of the operating frequency</b>	10 %
<b>Relative positive tolerance of the operating frequency</b>	10 %

### Installation/ mounting/ dimensions

<b>Mounting position</b>	vertical, horizontal
<b>Mounting type</b>	pluggable on terminal module
<b>Height</b>	265 mm
<b>Width</b>	45 mm
<b>Depth</b>	120 mm

### Ambient conditions

<b>Installation altitude at height above sea level</b>	
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	2 000 m
<b>Ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	0 ... 60 °C -40 ... +70 °C -40 ... +70 °C
<b>Relative humidity during operation</b>	5 ... 95 %

### Communication/ Protocol

<b>Protocol is supported</b>	
<ul style="list-style-type: none"> <li>• PROFIBUS DP protocol</li> <li>• PROFINET protocol</li> </ul>	Yes Yes
<b>Design of the interface</b>	
<ul style="list-style-type: none"> <li>• PROFINET protocol</li> </ul>	Yes
<b>Product function Bus communication</b>	Yes
<b>Protocol is supported</b>	
<ul style="list-style-type: none"> <li>• AS-interface protocol</li> </ul>	No
<b>Product function</b>	
<ul style="list-style-type: none"> <li>• supports PROFIenergy measured values</li> <li>• supports PROFIenergy shutdown</li> </ul>	No No
<b>Address space memory of address range</b>	
<ul style="list-style-type: none"> <li>• of inputs</li> </ul>	1 byte

<ul style="list-style-type: none"> <li>• of outputs</li> </ul>	1 byte
<b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• of the communication interface</li> <li>• for communication transmission</li> </ul>	via backplane bus via backplane bus

### Connections/Terminals


<b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>	screw-type terminals
<b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• 1 for digital input signals</li> <li>• 2 for digital input signals</li> </ul>	using control module using control module
<b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• at the manufacturer-specific device interface</li> <li>• for main energy infeed</li> <li>• for load-side outgoing feeder</li> <li>• for main energy transmission</li> <li>• for supply voltage line-side</li> <li>• for supply voltage transmission</li> </ul>	plug screw-type terminals Screw-type terminals via energy bus via backplane bus via backplane bus

### UL/CSA ratings

<b>Operating voltage</b> <ul style="list-style-type: none"> <li>• at AC at 60 Hz acc. to CSA and UL rated value</li> </ul>	600 V
--	-------

### Certificates/approvals

General Product Approval			For use in hazardous locations		
					
CCC	CSA	UL	EAC	ATEX	IECEX

Declaration of Conformity	Test Certificates	other
	<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Confirmation</a>
EG-Konf.		

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**



<http://www.siemens.com/industrial-controls/catalogs>


**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1301-0FB00-0AA2>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1301-0FB00-0AA2>

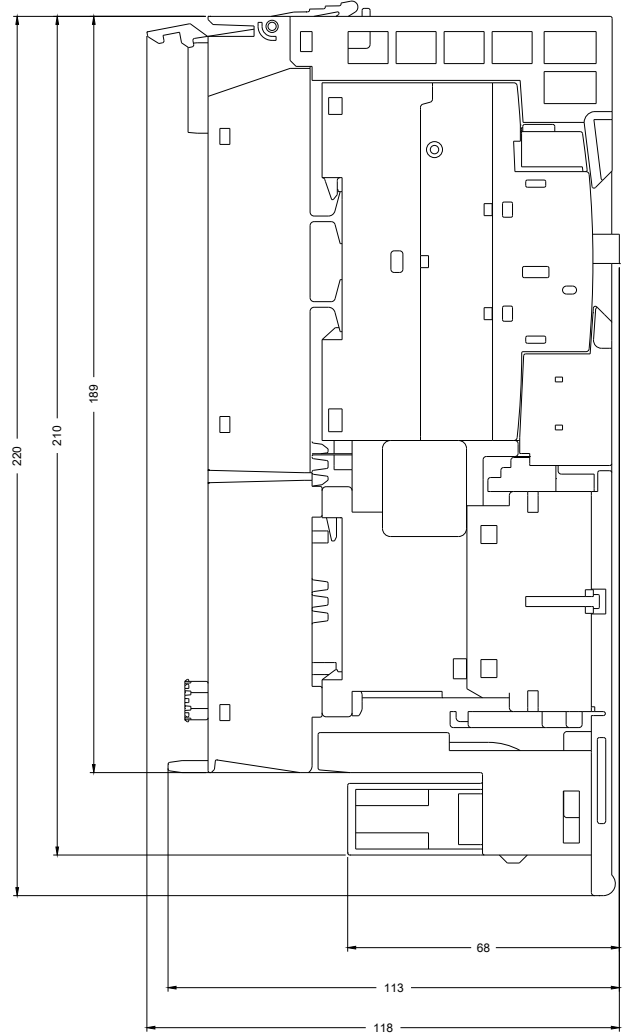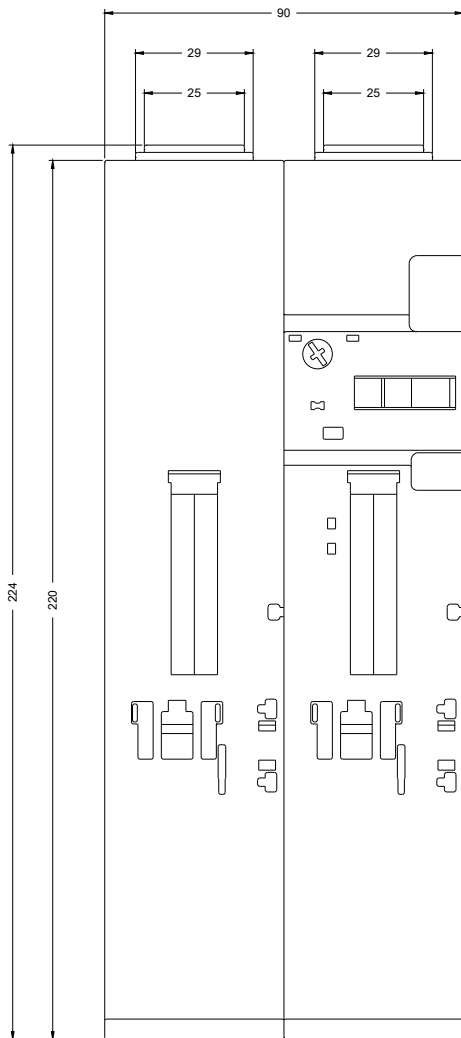

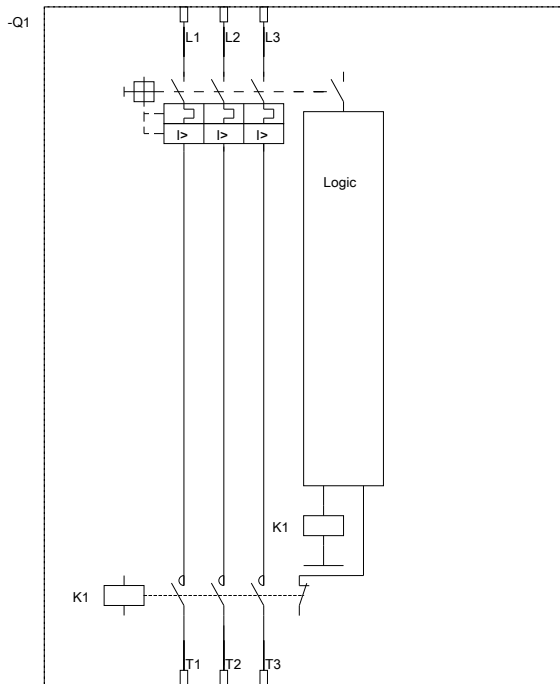

DI 0.0	Bereit
DI 0.1	Schütz ein
DI 0.2	Leistungsschalter ausg.
DO 0.0	Motor ein
DO 0.2	Bremse

DI 0.0	Ready
DI 0.1	Contactor on
DI 0.2	Circuit breaker tripped
DO 0.0	Motor on
DO 0.2	Brake

last modified:

10/06/2017