


# Components

## STAYPLATE

To be placed between each row of blocks. Stayplates simplify installation, increase stability and anchor blocks within the frame. Plates come in galvanized or stainless steel, aluminium and brass.

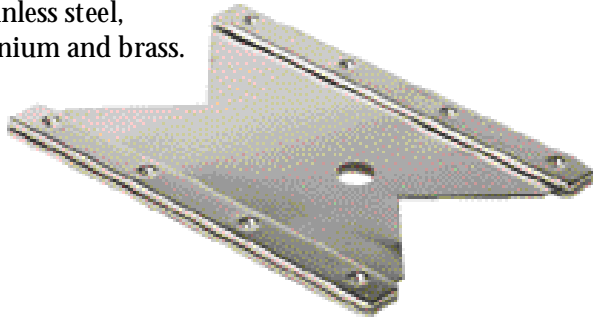


## STG-ENDPACKING

Installed between compression plate and the top of the frame, completing the seal. Made of Lycron with galvanized or stainless steel fittings.




## COMPRESSION PLATE

Usually assembled above top row of blocks. The plate bolt is tightened to compress blocks around cables, while providing room for STG endpacking. Comes in GRP, glassfibre reinforced polyester.

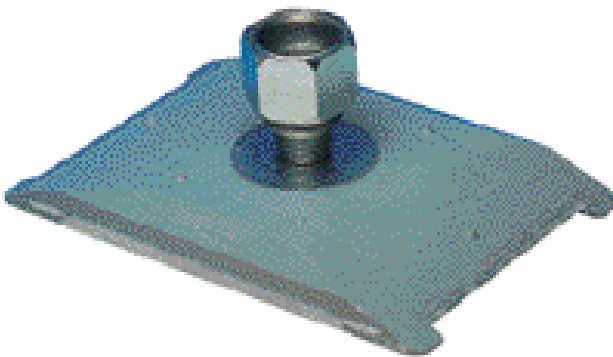


## PTG-PRESSWEDGE

Can be used as an alternative to compression plate and STG. Can also be placed anywhere in the frame. Made of Lycron, with galvanized or stainless steel fittings. Must always be installed in combination with a stayplate.

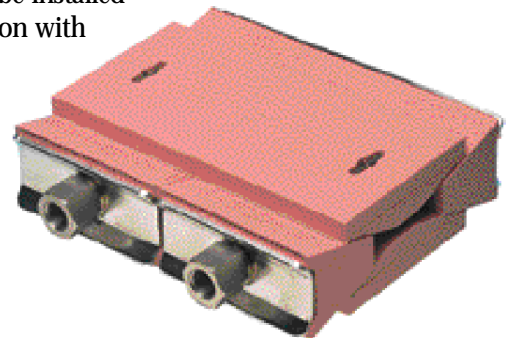

## ENDPACKING PULLER

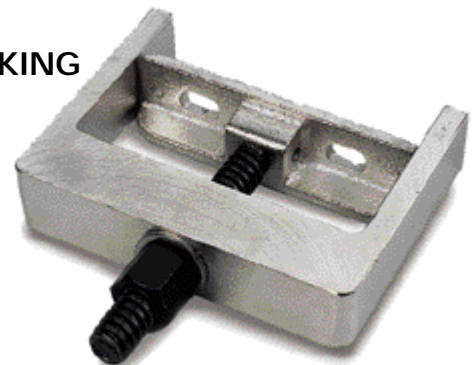

Weight in kilograms			
STG	PTG	COMPRESSIONPLATE	STAYPLATE
0,6	0,82	0,24	0,13