





SILIZED FUSE LINK 500V F.SEMICONDUCTOR
PROTECTION EXTRA FAST,
SIZE DII THREAD E27, 16A

Similar to image

Technical data:

| | | |
|---|----|-------------------------|
| Color coding of the fuse link | | others |
| Current / for AC / rated value | A | 16 |
| Tripping characteristic class | | super-quick acting (FF) |
| Size of the fallback-system / acc. to DIN EN 60269-1 | | DII |
| Supply voltage | | |
| • for AC / rated value | V | 500 |
| • for DC | V | 500 |
| Switching capacity current | | |
| • in accordance with IEC 60947-2 / rated value | kA | 50 |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 8 |
| Ambient temperature | | |
| • minimum | °C | -5 |
| • maximum | °C | 40 |

Certificates/approvals:

| General Product Approval | Declaration of Conformity | Test Certificates | other |
|---|---|--|---|
|  GOST |  EG-Konf. | Type Test Certificates/Test Report | Environmental Confirmations |

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5SD420/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD420

CAX-Online-Generator

<http://www.siemens.com/cax>

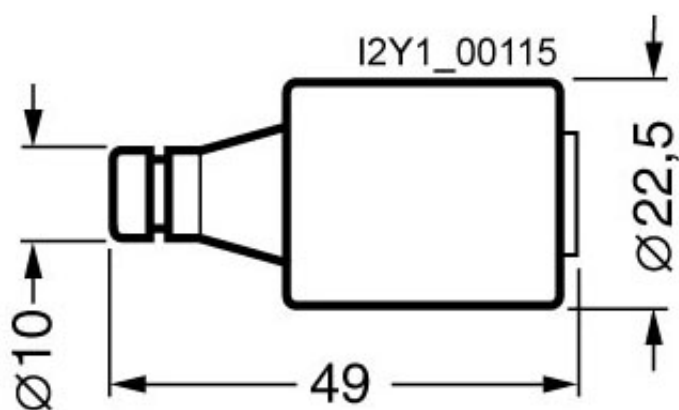

last change:

Nov 4, 2012