



Note: Product images do not represent this product. Actual product may differ from shown images.

Data subject to change without notice. Always confirm the data is correct from the seller.

KER 3630

KER Stainless Steel 16-1600A

- IP66; Enclosure types H23, H32, H02 (AISI 316, acid proof)
- IP65; Enclosure types H03, H04, H06, H07,

H08 (AISI 304 as standard, AISI 316 upon request)

- Where hygiene and good protection against corrosion are required
- Padlockable with three locks
- Door interlock with defeat mechanism
- Tested according to IEC 60947-3
- Also available as EMC, and EMC/EX - protected
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories



PRODUCT CARD


MORE INFORMATION

PRODUCT DETAILS

SKU	KER 3630
AC-21 400/415 V (A)	630 A
AC-21 690 V (A)	630 A

AC-22 400/415 V (A)	630 A
AC-22 690 V (A)	630 A
AC-23 400/415 V (A/kW)	630 A / 355 kW
AC-23 690 V (A/kW)	630 A / 630 kW
Cable Area to Switch Terminal (mm2) / Bolt size	M12
Color	Standard
EAN	6419410343968
Enclosure	H04
Enclosure Type	Stainless Steel: Polycarbonate Handle
IP Rating	65
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	25

DIMENSIONAL DRAWING

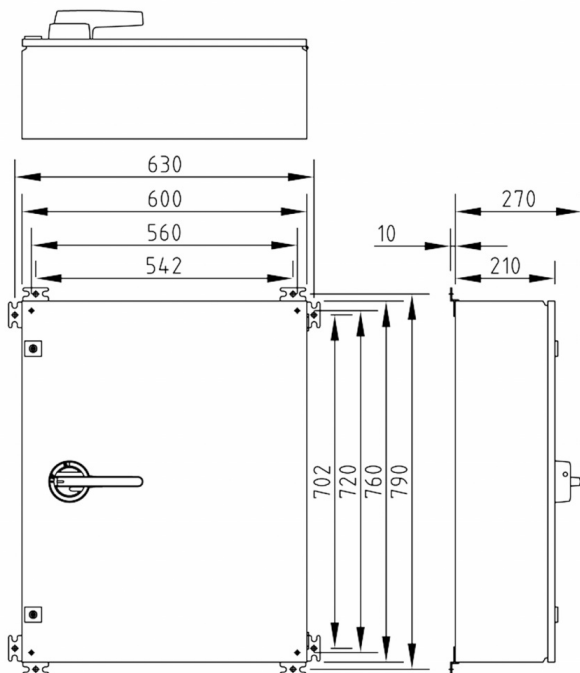

KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

Email

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)