

Product Information

Name:

Flush-type wall rocker switch for fixed installation

Technical Data: 16AX 250VAC

Frequency: 50Hz

Colour: White

Main material: PC (Halogen free)

IP-Class: IP20

Max. Ambient temp.: 45°C

Fire hazard test: 650°C/850°C (IEC60695-2-11)

The product complies with the standard(s):

EN60669-1

The product is in conformity with the provisions of the following European directive(s):

LVD

RoHS

WEEE

REACH

Certificate(s): CE, Semko

Quality management system according to:

ISO 9001

Environmental management system:

ISO 14001

Occupational Health and Safety Management System:

ISO 45001

Technical info:

Can also be surface mounted switch by use of a surface mounting frame 20 mm high ETM239P for P series.

Wiring diagram printed on the rear side.

Thermoplastic in the rocker and cover plate.

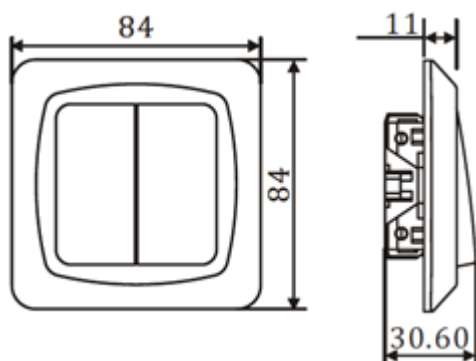
Flush wiring. Screw terminal.

Fit into wall boxes, screw distance cc 60 mm -cover plate cc 84 mm.

With standard 55x55 mm central plate, can fit into our standard combination plate (code named "S").

**Type Designation:**

E-No.	Type	Description/Remark
	U203	1+2-pol , pattern No. 1+2

Drawing:**Wiring diagram:**