

Technical data sheet

PV system solution, type 2, with MC4 connector and switch disconnecter for inverter with 2 MPP trackers, Item no. 5088503



System solution, type 2, with MC4 connector and switch disconnecter for inverter with 2 MPP trackers, 1,000 V DC


- Varistor arrester, connectable with cut-off unit in error-resistant Y circuit to VDE 0100-712 (50539-12)
- Low DC voltage protection level: < 4.0 kV (Voc max = 1,000 V DC with V20-C/0-500PV)
- Switch-disconnector (1,000 V; 8 A) for safe switch-off of the DC string line
- One PV string input (MC4 plug connector) at an MPP input, up to 30 A DC per terminal
- Pre-mounted in polycarbonate housing (IP66), UV-resistant for use outside

For DC protection of the inverter in photovoltaic systems.
If there is a danger of condensation forming through wind, ice, temperature or sunlight, further measures may be necessary!



PC Polycarbonate

Dimensions

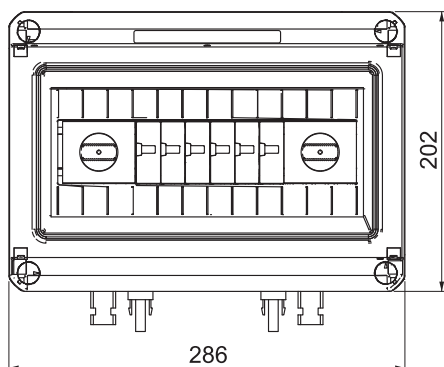

Master data

Item no.	5088503
Type	PKV-C1000ST110
Description 1	PV system solution in housing
Description 2	2 string to 2 WR with switch
Dimension	1000V DC
Colour	Light grey
RAL number	7035
Material	Polycarbonate
Material symbol	PC
Smallest sales unit (VG)	1,00 Piece

Technical data sheet


PV system solution, type 2, with MC4 connector and switch disconnector for inverter with 2 MPP trackers, Item no. 5088503



Master data

Weight	270,00 kg/100 pc.
--------	-------------------

Technical data

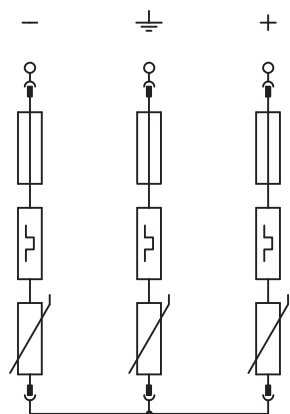

SPD to EN 61643-11	Type 2
SPD to IEC 61643-11	Class II
Test class, type 2	☒
Nominal voltage DC	1.000,00 V
Maximum continuous voltage DC	1.000,00 V
U max DC	1.000,00 V
Nominal discharge current (8/20 µs)	20,00 kA
Nominal discharge current (8/20)	20 kA
Maximum discharge current (8/20 µs)	40,00 kA
Protection level	4,00 kV
Protection level	< 4,0 kV
Response time	< 25 ns
Maximum back-up fuse	125,00 A
Temperature range	-40+80 °C
Pole version	3
Version	3-pole for PV systems
Version	3-pole
Mounting type	Pre-mounted in the housing
Installation type	Pre-mounted in the housing
Protection rating	IP66
Protection rating	IP66
Size	Other
Remote signalling	☐
Integrated back-up fuse	☐
Max. PV voltage	1.000,00 V
Signalling on device	Visual