

In-wall Switch 400W

Zigbee connected built-in switch. Control your lights locally on existing switch or remote by app.



Make your existing light switch smart. With the in-wall switch, you can still cut the power on your local switch as traditional light control, as well as remotely via App by connecting the device to one of our smart home hubs or smart routers. The product is the perfect solution for LED lamps and light sources that should not, or can not, be dimmed. Wireless LED smart bulbs should be connected directly to your smart home hub as they are communicating individually.

Production data

- EI-number (NO): 4512800
- Product category: Indoor Climate and Lighting
- SKU/Art.no: HC-IWSWI-1
- GTIN (EAN): 7090026461070

Power

- Primary power source: Part of Fixed Installation
- Voltage (V): 100-240V AC
- Power Max. (W @230V): 400
- Max Load (A ~ V): 1,8A ~230V

Communication network

- No subscription required

Type of Keypad

- Physical Buttons

Materials and colors

- Finish: Plastic, glass front panel
- Color: White

Communication smart home

- Requires smart home hub
- RF communication protocol: Zigbee 3.0
- Range extender (MESH): Zigbee
- Max wireless range (meter): 30 (open range)
- OTA update support
- Voice control support(When connected to a Heimgard Hub. Voice assistant is not included): Google Assistant
- App control (When connected to a Heimgard Hub)
- Name of available app(s): Heimgard app

Function keys

- Qty: 1
- Type: Reset

Technical Specifications

- Maximum Cross Section (mm²): 2.5
- Type of Switch: Actuator
- Actuator type: Switch

Key features

- ▶ 1,8A ~230V
- ▶ 1-pole (Single phase break)
- ▶ Schedule or remote control your lights
- ▶ Zigbee range extender
- ▶ Authorized installer required

Order no.: 118375

In-wall Switch 400W

Zigbee connected built-in switch

Placement and operation temperature

- Field of application: Indoors
- IP classification: IP20
- Operating temperature (°C): -10 – +50
- Operating relative humidity (%): 40~90%RH (No condensation)
- Mounting options: Optional DIN clip
- Placement: Integrated
- Authorized installer required
- Type of junction box: Single
- Terminal connection type: Screw

Memory

- Storage options: Cloud storage (Subscription required)

Safety

- Phase break (Single/Dual): 1-pole
- Protection class II
- Halogen-free

Certificates

- CE, FCC, ROHS

Logistics and packaging


- Customs Tariff Number (HS-Code): 8536.50.0000
- Country of origin: China
- Dimensions F-PAK HxWxD (cm): 7.3x11.5x3.5
- Dimensions D-PAK HxWxD (cm): 36.5x35x35
- Gross weight F-PAK (g): 115
- Gross weight D-PAK(kg): 13,5
- Quantity in F-PAK (sales pack): 1
- Number of F-PAK in D-PAK (carton): 100
- Minimum order quantity: D-PAK
- Order multiple: D-PAK
- Storage temperature (°C): 10-35°C
- Storage humidity (%): 30-50%RH (No condensation)

Package Content

- Main product
- Quick start guide

Design, dimensions and weight

- Dimensions HxWxD (mm): 4.55x4.5x2.03
- Net weight (g) F-PAK: 120
- Net weight per unit (g): 41

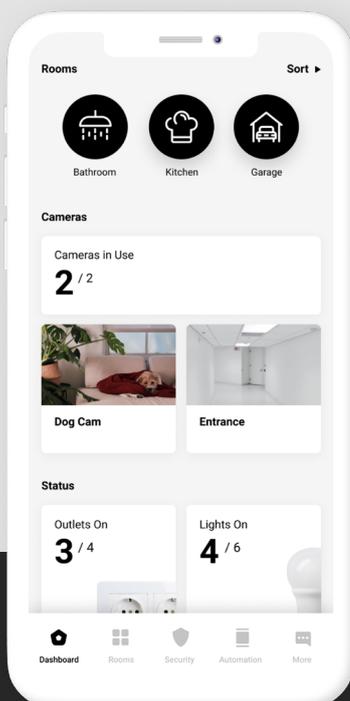

You can control more than 2 000 products from leading brands like Ikea, Samsung, Google and many, many more with the Heimgard Smart Home app. Available in Apple Store and Play Store.