


CODE: **AWO213 v1.7**
NAME: **17/TRZ40/SATEL/SP**

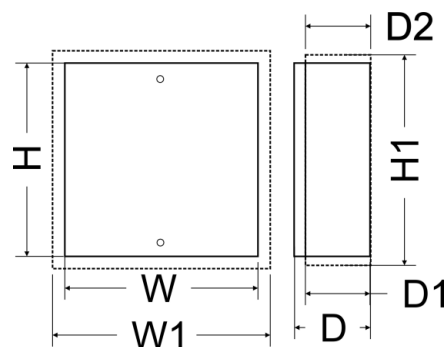

DESTINATION

SATEL (*) CONTROL PANELS: INTEGRA 24,32 + 2x CA-64 (E, SM, O-OC) + GSM LT-1,

CA-5, CA-6, CA-10 + CA-10E (GSM LT-1 or MST-1),

MODULES: CA-64 (PP, EPS, ADR, O-R, O- ROC, OPS-OC, OPS-R, OPS-ROC, VMG-16, SR, DR, PTSA)

+ 2x CA-64 (E, SM, O-OC) + GSM LT-1, **ACC-KP-PS**

SATEL () CONTROL PANELS:** INTEGRA 24,32 + 2x CA-64 (E, SM, O-OC) lub 1x CA-64 (E, SM, O-OC) +GSM LT-1

CA-5, CA-6, CA-10 + CA-10E (GSM LT-1 or MST-1),

MODULES: CA-64 (PP, EPS, ADR, O-R, O- ROC, OPS-OC, OPS-R, OPS-ROC, VMG-16, SR, DR, PTSA)

+ 2x CA-64 (E, SM, O-OC) or 1x CA-64(E, SM, O-OC) +GSM LT-1, **ACC-KP-PS**

TECHNICAL DATA

Dimensions:	W=320, H=305, D=105, W1=325, H1=310, D1=90mm, D2=90 [mm, +/-2]
Weight netto/brutto:	4,2 / 4,4 [kg]
Battery space:	(*)7Ah/12V, (**)17Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRZ 40VA/16V/18V
Power supply:	230V/AC (-15%/+10%), 50+60Hz, 235mA (max.)
Power supply output:	U1=16V/AC U2=18V/AC (-5%, +15%), I1=2,2A I2=2,0A (max.)
Operating environment:	class II , -10°C÷ 40°C
Tamper protection:	2 x microswitch: opening or removal from wall, 0,5A@50V/DC max. NC/NO contacts
Closing: :	screwed x 2, (screwed for front casing)
Notes:	distance from wall (mounting surface) - 15mm, easy door removal, RAL 9003, hole for pigtail
Certification, declaration:	CE, RoHS, CLC/TS 50131-3:2003