

SenseDriver til 5000lm



El-nummer: **6600078**
EAN: 7021988200858
SG Artikkelnr: 5046820085



Lysteknikk

Versjon: Driver til 5000lm
Watt: 46W
Systemeffekt (W): 46.0W
Spennning: 230V
Levetid: 50.000

Dimmetype

Type: DALI/1-10V
Driver: 1400mA 0-39V 5000

Beskyttelse

Isolasjonsklasse: Klasse I
IP-grad: IP20
Ta nominel: Tc=85°C

Energi og godkjenning

Godkjenning: CE

Materialer og overflater

Armaturhus: Plast

Montering/Tilkobling


Montering: Utenpåliggende, Innendørs
Kobling: 5 pol Linect
Maks. armaturer per sikring: B10: 18, B16: 30, C10: 31, C16: 51

Dimensjoner (mm)


Lengde (L): 315
Bredde (W): 100
Høyde (H): 35
Vekt (brutto/netto): 0.576 / 0.376

Forpakning

Forpakningsstørrelse: 400 x 45 x 10

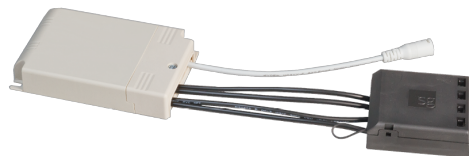

SENSE 1400mA/5000lm DRIVER DALI

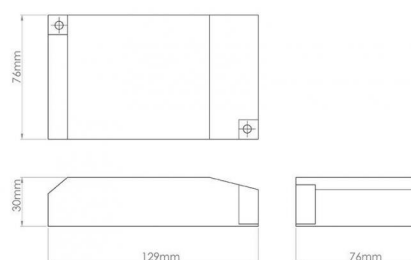

Sense Panels & Driver Kits										
	CRI (Ra)	LED (lm)	BA (°)	SENSE 3000lm DRIVER KIT PHASE DIM (700mA)	SENSE 4000lm DRIVER KIT NON DIM (1000mA)	SENSE 5000lm DRIVER KIT NON DIM (1400mA)	SENSE 3000lm DRIVER KIT DALI (700mA)	SENSE 4000lm DRIVER KIT DALI (1000mA)	SENSE 5000lm DRIVER KIT DALI (1400mA)	
SENSE OPAL 3-4000lm LED 3000K	80	3	110	2700mV UGR<22 21W/128lm/W	4000mV UGR<22 31.2W/127lm/W	x	2700mV UGR<22 21W/128lm/W	4000mV UGR<22 31.2W/127lm/W	x	
SENSE OPAL 3-4000lm LED 4000K	80	3	110	2700mV UGR<22 21W/128lm/W	4000mV UGR<22 31.2W/127lm/W	x	2700mV UGR<22 21W/128lm/W	4000mV UGR<22 31.2W/127lm/W	x	
SENSE OPAL 3000lm LED 3000K	80	3	110	2700mV UGR<22 21W/128lm/W	4000mV UGR<22 31.2W/127lm/W	x	2700mV UGR<22 21W/128lm/W	4000mV UGR<22 31.2W/127lm/W	x	
SENSE OPAL 3000lm LED 4000K	80	3	110	2700mV UGR<22 21W/128lm/W	4000mV UGR<22 31.2W/127lm/W	x	2700mV UGR<22 21W/128lm/W	4000mV UGR<22 31.2W/127lm/W	x	
SENSE PRISM 3-4000lm LED 3000K	80	3	90	2700mV UGR<17 21W/133lm/W	4000mV UGR<19 31.2W/127lm/W	x	2700mV UGR<17 21W/133lm/W	4000mV UGR<19 31.2W/127lm/W	x	
SENSE PRISM 3-4000lm LED 4000K	80	3	90	2700mV UGR<17 21W/133lm/W	4000mV UGR<19 31.2W/127lm/W	x	2700mV UGR<17 21W/133lm/W	4000mV UGR<19 31.2W/127lm/W	x	
SENSE PRISM 10000lm LED 3000K	80	3	90	2700mV UGR<17 21W/133lm/W	4000mV UGR<19 31.2W/127lm/W	x	2700mV UGR<17 21W/133lm/W	4000mV UGR<19 31.2W/127lm/W	x	
SENSE PRISM 10000lm LED 4000K	80	3	90	2700mV UGR<17 21W/133lm/W	4000mV UGR<19 31.2W/127lm/W	x	2700mV UGR<17 21W/133lm/W	4000mV UGR<19 31.2W/127lm/W	x	

Notes: efficiency calculations are not driver
incl. driver: 7-14% loss depending on driver

l



7 0 2 1 9 8 8 2 0 0 8 5 8