


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>7024-9</b>                                                                                                                                                                                                                                                                                           |
| article description    | <b>CEE-phase inverter plug 32A 4p 9h IP44 SHARK</b>                                                                                                                                                                                                                                                     |
| description long       | CEE-phase inverter plug 32A 4p 9h IP44 SHARK<br>housing material: PA6<br>rated current: 32A<br>number of poles: 4 (3P+PE)<br>clock-position: 9h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399158544                                                                                                                                                                                                                                                                                           |
| country of origin      | AT                                                                                                                                                                                                                                                                                                      |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                |
| net weight             | 0.204 kg                                                                                                                                                                                                                                                                                                |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                      |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                      |

|                            |                           |
|----------------------------|---------------------------|
| ETIM 7.0                   | EC000140                  |
| IEC-amperage               | 32 A                      |
| Number of poles            | 4                         |
| Voltage acc. EN 60309-2    | 200-250 V (50+60 Hz) blue |
| Clock hour position        | 9 h                       |
| Identification colour      | Blue                      |
| Phase inverter             | True                      |
| Degree of protection (IP)  | IP44                      |
| Connection system          | Screwed terminal          |
| Cable entry                | Swivel                    |
| Angle of plug              | Straight                  |
| Material                   | Plastic                   |
| Contact material           | CuZn                      |
| Surface treatment contacts | Nickel-plated             |

|                    |                       |
|--------------------|-----------------------|
| a                  | 150 mm                |
| b                  | 104 mm                |
| c                  | 63 mm                 |
| K (cable Ø)        | 11,5-20 mm            |
| SW                 | 50 mm                 |
| wire flexible      | 2,5-6 mm <sup>2</sup> |
| contact screws     | 110 Ncm               |
| strain relief      | 600 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 12-14 mm              |

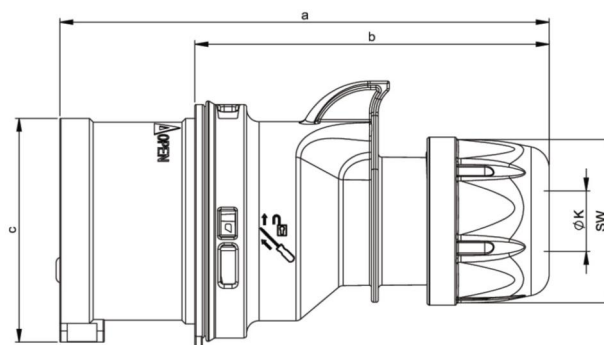

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)