



CLETOP-S
CASSETTE AND
STICK

NEXT
GENERATION
CLEANING
PERFORMANCE



The new CLETOP-S fiber optic cleaning cassette builds on the success of its predecessor to give world class cleaning performance at exceptionally competitive cost efficiency. Designed to suit operators, production engineers and buyer alike, the CLETOP-S offers the following advances: -

- More Rugged, Ergonomic Design
- Slide open lock offers easier access to replacement reels
- Integrated replacement cartridge offers quicker, easier reel change
- Central push button operation offers ease of use for left handed and right handed operators
- Moulded plastic design makes it more cost effective than ever
- New tape availability offers improved cleaning performance
- Anti-static body and replacement cartridge

With no competitive product able to match its cleaning performance, ruggedness, and cost effectiveness, the CLETOP-S is the professional choice.



TECHNICAL
DATA AND
SPECIFICATION

The CLETOP-S does away with cleaning fluids such as isopropyl alcohol which are not only toxic and flammable, but also leave a residue on the fibre ends after cleaning. The CLETOP-S cloth is extremely effective in the removal of oil, grease, dust and other contaminants from ferrule surfaces.



WHY SHOULD YOU CLEAN YOUR CONNECTORS

- **Dirt can cause pits and scratches on the ferrule end-face**
- **Dirty connectors may damage their mated counterparts**
- **Dirt can increase attenuation**
- **Dirt can increase digital bit error rates**
- **Dirt can reduce bandwidth**

WHY SHOULD YOU USE THE CLETOP-S

Wiping the surface with a conventional 15 micron fibre cloth leaves a trail of dirt behind.

The 2 micron fibre of the CLETOP-S cloth lifts all dirt through capillary action, trapping the dirt in the “micro pockets” inside the cloth.

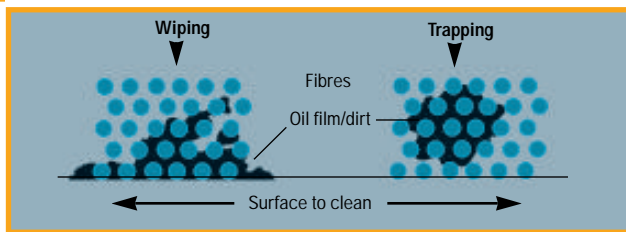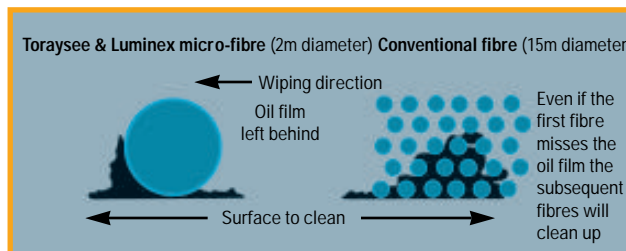

CLETOP-S reel-type		
Life time over 400 wipes per replacement reel		
Size	125 mm x 90 mm x 43 mm	
CLETOP-S A-Connector Types	SC, FC, ST, SMA, D4.	
CLETOP-S B-Connector Types	MU, MT, LC, Biconic, MPO (without pin), MT-RJ (without pin)	
CLETOP stick-type		
Size available	2.5 mm stick	1.25 mm stick
Length of stick	147 mm	101 mm
Connector/adaptor types	FC, ST, SC, SMA, D4, Diamond LC, MU	



Certificate No FM23779



United States

31316 Via Colinas, Unit 117/118, Westlake Village, CA 91362, USA
Tel (818) 991 2972, Fax (818) 991 2974 www.aerotechusa.com
Email: sales@aerotechusa.com

United Kingdom

Aerotech House, St, Peter's Road, Maidenhead, Berkshire, SL6 7QU
Tel (44) 01628 634555, Fax (44) 01628 781070 www.aerotech.uk.com
Email: sales@aerotech.uk.com