

# Accessories


## Around the House

### PIR Sensor

- Sensor to detect motion in correlation with daylight level
- Including remote control to adapt sensor settings
- Earth spike included, suitable for wall-mounting
- Reliable on/off function thanks to infrared technology
- IP65
- IK04
- Ambient temperature: -20 to +40°C
- Switching load: 800 W
- Electrical class: I
- Connection via THORNeco cable system or adaptor with open leads (included)



#### Detection range



#### Controllability

⌚ Time	10 s, 90 s, 5 min, 10 min, 15 min, 20 min, 30 min
☀ lux	10 lux, 50 lux, 100 lux, 200 lux, 500 lux, 1000 lux, 2000 lux

Description	Wt (kg)	SAP Code
ECO PIR SENSOR	0.36	96633592

### Photocell


- Detection of daylight/brightness level
- Switch to determine on which brightness level lights should turn on
- Earth spike included, suitable for wall-mounting
- IP65
- IK04
- Ambient temperature: -20 to +40°C
- Switching load: 200 W
- Electrical class: I
- Connection via THORNeco cable system or adaptor with open leads (included)



Description	Wt (kg)	SAP Code
ECO PC SENSOR	0.36	96634061

### Conny IP68 Connector

- Quick connector 3 pole
- Tool free
- IP68
- Suitable for outside and inground use
- Cable diameter 6.5 - 12 mm
- Rated cross-section rigid, single and fine stranded 1 - 2.5 mm<sup>2</sup>






Description	Wt (kg)	SAP Code
CONNYP68 QUICK CONNECTOR 16A 3-POL	0.05	96632722

#### Conny IP68 Connector



#### PIR Sensor / Photocell



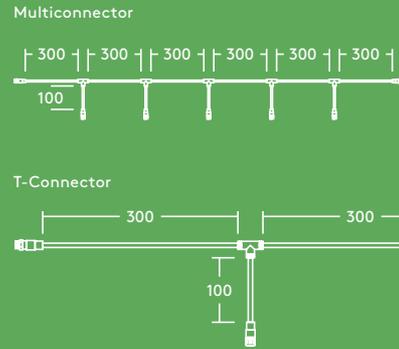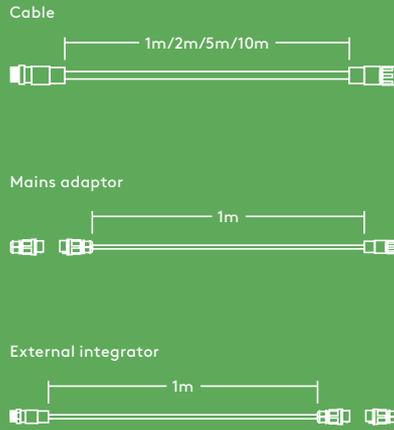

## Cables & Connectors

- Tool free
- 3 pole
- IP68
- High mechanical strength
- Flexible cable H07RN-F 3G 1.5 mm<sup>2</sup>
- Cable suitable for outside and inground use\*



**Mains adaptor:** connects luminaires of THORNeco cable system to mains (one side: Conny connector, other side: Female)



**External integrator:** connects luminaires of other suppliers to the THORNeco cable system (one side: Male, other side: Conny connector)



**Extension cable with Male/ Female connector in different lengths (1m, 2m, 5m, 10m)**



**T-Connector for extension (1 Male, 2 Female)**

Description	Wt (kg)	SAP Code
ECO EXTENSION CABLE 1M	0.16	96633584
ECO EXTENSION CABLE 2M	0.30	96633585
ECO EXTENSION CABLE 5M	0.73	96633586
ECO EXTENSION CABLE 10M	1.45	96633587
ECO MAINS ADAPTOR	0.20	96633588
ECO EXT INTEGRATOR	0.20	96633589
ECO T-CONNECTOR	0.14	96633590
ECO MULTICONNECTOR	0.58	96633591

\*The suitability might differ according to different national regulations



**Multiconnector for extension (1 Male, 6 Female including protection caps)**