
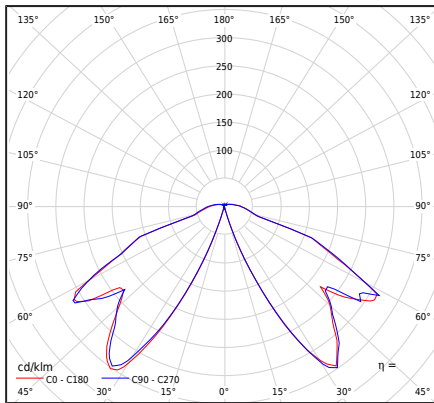


| Art.nr | El.nummer | Farge            | RAL  |
|--------|-----------|------------------|------|
| 893GA  | 3110093   | GALVANISERT STÅL | -    |
| 893B   | 3110094   | SORT             | 9005 |

## Generell informasjon

|                                    |   |
|------------------------------------|---|
| Type armatur                       | Pullert   |
| Materiale                          | Galvanisert stål Lakkert stål   |
| Avdeknings materiale/optikk        | Klar polykarbonat, UV stabilisert   |
| Type lyskilde                      | LED modul + driver  |
| Lysstyring                         | Ikke dimbar   |
| Netto / Brutto vekt armatur        | 11,94kg / 12,44kg   |
| Forpakkingsstørrelse [cm]          | 15x15x91  |
| 4xLED moduler                      | Cree JK3030 3000K no.1805004  |
| Driver                             | Osram OT FIT 15/220-240/500 LT2 S   |
| Effekt W                           | 9,9W  |
| Armatureffekt                      | 12,7W   |
| Modul lumen                        | 1424lm  |
| Lumen ut                           | 593lm   |
| Modul effektivitet                 | 143,8lm/W   |
| Armatur Lumen/Watt                 | 46,7lm/W  |
| ULOR                               | 0%  |
| Fargetemperatur                    | 3000K   |
| Farvekonsistens (McAdam-Ellipse)   | SDCM3   |
| Fargegjengivelsesindeks            | 80  |
| Beregnet levetid L70/B50 ved 25°C  | 50 000h   |
| Energieffektivitetsindeks (EEI)    |  |
| Virkningsgrad                      | PF > 0,85   |
| Ta nominel:                        | +25°C   |
| Inrush current                     | 24A / 174µs   |
| Antall armaturer på automatsikring | <b>B 10A: 17, B 16A: 28, C 10A: 29, C 16A: 47</b>                                   |



## Filer som kan lastes ned

Photometric LDT files, Photometric IES files, Manual

