


Air Blown Unit 2,0mm max. 4F

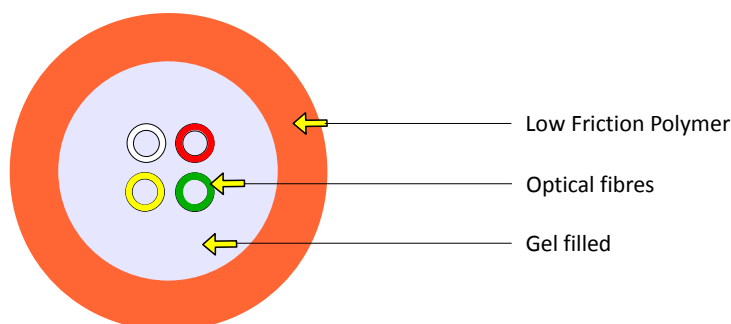

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	2,0 ± 0,05	mm	EN 60811-1-1
Cable weight	4	kg/km	
Outer jacket thickness	0,6	mm	
Coefficient of friction	0,09	mm	
Max. tensile strength	70	N	EN 60794-1-21-E1
Crush resistance test	1000	N	EN 60794-1-21-E3
Impact resistance test	3	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	15	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-5 to +50	°C
	Operation	-20 to +70	°C
	Storage	-20 to +70	°C

Cable lifetime - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

1 White

2 Red

3 Yellow

4 Green

Other fibre colour sequences available on request

Packing

Depending on ordered put-up lengths

