

MLT Blown Micro Cable

ID: **Z108**




KABELOVNA Děčín Podmokly s.r.o.
Ústecká 840/33, 405 33 Děčín 5
Czech Republic
DIČ CZ26759993
tel.: +420 412 706 222
www.kabelovna.cz

30.1.2017 ver.1

A-DQ2Y 16×1,5 max. 192F

This cable is suitable for Air-blowing.

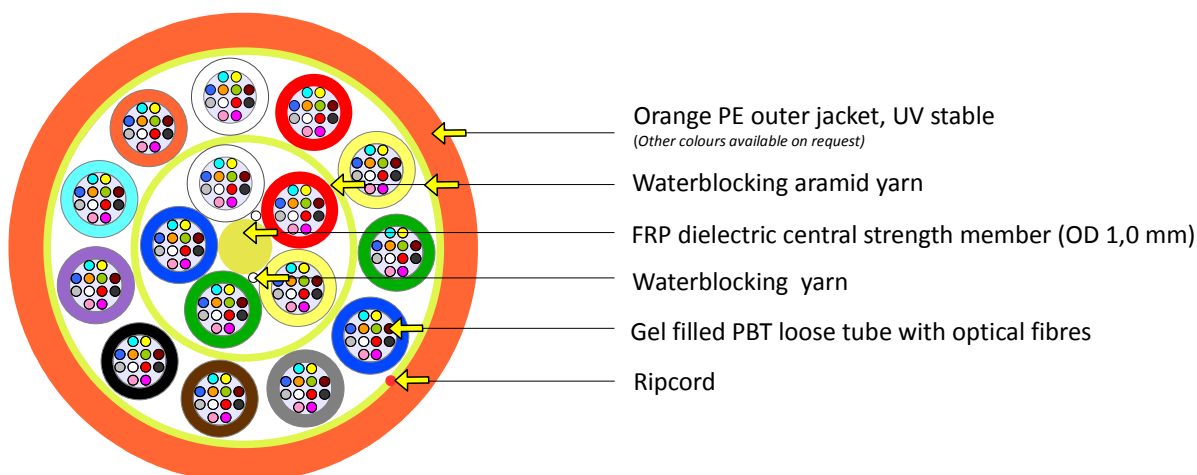

Mechanical and Environmental properties

Test	Value	Unit	Method	
Cable outer diameter	8,0±0,4	mm	EN 60811-203	
Cable weight	53	kg/km		
Outer jacket thickness	0,5	mm		
Loose tube diameter	1,5	mm		
Max. tensile strength	700	N	EN 60794-1-21-E1	
Crush resistance test	1500	N	EN 60794-1-21-E3	
Impact resistance test	3	Nm	EN 60794-1-21-E4	
Min. bend radius	15	× OD	EN 60794-1-21-E11	
Moisture resistance test	pass		EN 609794-1-22-F5	
Temperature range	Installation	-15 to +50	°C	EN 60794-1-22-F1
	Operation	-30 to +70	°C	
	Storage	-30 to +70	°C	

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet or Hot-foil
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

1	White	7	Brown
2	Red	8	Black
3	Yellow	9	Violet
4	Green	10	Turquoise
5	Blue	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

Tube colour coding

1	White	7	Brown
2	Red	8	Black
3	Yellow	9	Violet
4	Green	10	Turquoise
5	Blue	11	Orange
6	Grey	12	Pink

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Packing

Depending on ordered put-up lengths

