


Skjøtehylser

| | |
|---------------------------------|--------------------------------------|
| Sleeve Diameter After Shrinkage | 2.4 mm (0.094 inch) |
| Supplied Internal Diameter | 1.4 mm (0.055 inch) |
| Fiber size | 250 / 900 um |

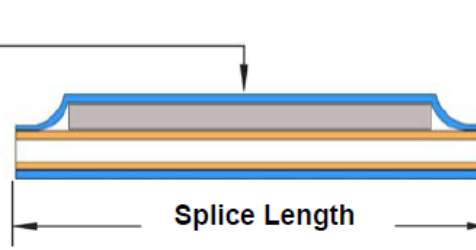

- Heat Shrink Outer Tube
- Adhesive Inner Tube
- Stainless Steel Pin

| | Sleeve Length | Inner Length | Pin Diameter | Pin Length |
|-------------|---------------|--------------|--------------|------------|
| Part Number | mm | mm | mm | mm |
| PS-3A-/45 | 45 | 45 | 1 | 41 |
| PS-3A | 61 | 61 | 1 | 57 |



Technical Features

Designed to improve the strength and environmental protection of optical fiber after fusion splicing. The splice sleeves consist of a pre-shrunk heat bonded assembly and single fiber aperture for quicker and faster assembly.

| | |
|-------------------------------|--|
| Inner material: | Hot-melt adhesive Ethylene Vinyl Acetate (EVA) |
| Outer Material: | Irradiation cross-linked Polyolefin heat shrinkable tubing |
| Reinforcing Pin: | Deburred and polished Stainless Steel |
| Splice Operating Temperature: | -40°C to +70°C |
| Storage Temperature: | -40°C to +70°C |

Product Approvals

Bellcore GR-1380-CORE (Telcordia) and BT (British Telecom) Approved, RoHS & REACH Compliant.

Recommended Installation Guidelines

An oven setting of 125°C for a time of 60 seconds (depending on oven type used and the length of the splice) is recommended. Allow at least an additional 30 seconds cooling time before inserting into the splice tray to allow the meltable adhesive to set.

Ordering information

| Artikkel nr | Description |
|-------------|--|
| 1001 | PS-3A-X Fiber splice protector 3A - 45mm, 100stk./pk |
| 1000 | PS-3A-X Fiber splice protector 3A - 61mm, 100stk./pk |