




# Technical Data Sheet

for

**KKHR 32,40 and 50**

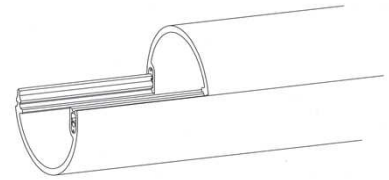

## general data

<i>item</i>	split duct, KKHR 32,40 and 50		
<i>description</i>	consists of 2 half shells, for pressure tight repair damages in PE duct or close blow in area in combination with EBM		
<i>optional</i>	To install the split ducts, it is necessary to use the according assembly tool.		
<i>package unit</i>	KKHR Ø 32mm x 2000mm	2 pieces / unit	84 pieces / pallet
	KKHR Ø 40mm x 2000mm	2 pieces / unit	68 pieces / pallet
	KKHR Ø 50mm x 2000mm	3 pieces / unit	51 pieces / pallet
<i>production length</i>	2000mm		

## technical data

quality	value	unit
<i>material</i>	PolyVenylChlorid - Unplastinized PVC-U	
<i>dimension</i>	$D = 32,0^{+0,2}; s = 1,8^{+0,4}$	mm
	$D = 40,0^{+0,2}; s = 1,9^{+0,4}$	
	$D = 50,0^{+0,2}; s = 2,4^{+0,5}$	
<i>pressure</i>	$0,5$ (permanent gas and watertight)	bar
	10 / 30	bar / min
	mastic (enclosed at the sleeves) is to use according installation instruction	

**The production and the supervision are controlled by a quality system following DIN EN ISO 9001:2000**

editor: ZM; 28.01.2011

release: MK; 31.01.2011

Page 1 / 1

gabo Systemtechnik GmbH • Am Schaidweg 7 • 94559 Niederwinkling  
phone +49 (0) 9962-950 200 • fax +49 (0) 9962-950 202 / 203