


## PREMIUM 85 CW

An 8.5 mil (0,21mm) all weather, professional grade, pressure sensitive vinyl tape that provides heavier thickness for added mechanical and electrical protection. Cold and weather resistant. Flame retardant. Can be used as primary insulation for splices at not more than 600 Volts. Excellent protective jacket over all types of splices. UL 510, ASTM-D-3005, MILI-24391C. Lead-free.

## PREMIUM 37 Color Coding

A 7 mil (0,18mm) all weather, professional grade, pressure sensitive vinyl tape that is available in nine colors for color coding and insulating. Cold and weather resistant. Flame Retardant. Use Premium 37 for quick identification of electrical circuits, containers, and conduit systems, as well as primary insulation for splices at not more than 600 volts. UL 510, ASTM-D-3005, HHI-595C. Lead-free.

# VINYL ELECTRICAL TAPES

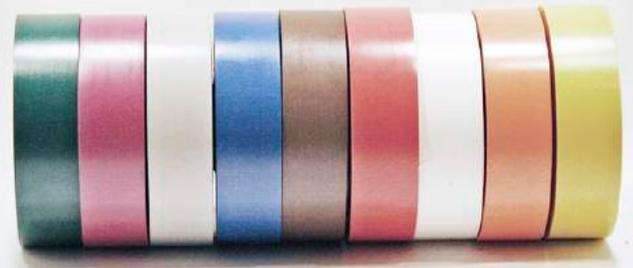

### PREMIUM 85 CW

Cat.	Color	Dimensions		Packaging	Weight
4240	black	3/4" x .0085" x 66'	19mm x 0,21mm x 20m	100/case PC	28 lbs 13 kg
4241	black	2" x .0085" x 20'	50mm x 0,21mm x 6m	108/case PC	23 lbs 10 kg
4274	black	2" x .0085" x 108'	50mm x 0,21mm x 33m	40/case PC	35 lbs 16 kg
4252	black	1 1/2" x .0085" x 66'	38mm x 0,21mm x 20m	100/case C	38 lbs 17 kg
4273	black	1 1/2" x .0085" x 108'	38mm x 0,21mm x 33m	50/case C	38 lbs 17 kg
4311	black	2" x .0085" x 66'	50mm x 0,21mm x 20m	40/case C	28 lbs 13 kg
4243	black	3/4" x .0085" x 66'	19mm x 0,21mm x 20m	100/case C	23 lbs 10 kg

### PREMIUM 37 Color Coding (Plastic Can)

Dimensions		Packaging	Weight
3/4" x .007" x 66'	19mm x 0,18mm x 20m	20/case PC	5 lbs 2 kg
Cat.&Color			
3702 green	3703 yellow	3704 red	3705 blue
3706 white	3707 brown	3708 orange	3709 grey
3711 violet			

### PREMIUM 37 Color Coding (Cello+Label)

Dimensions		Packaging	Weight
3/4" x .007" x 66'	19mm x 0,18mm x 20m	100 case C	21 lbs 10 kg
Cat.&Color			
8756 green	8754 yellow	8751 red	8753 blue
8752 white	8757 brown	8759 orange	8755 grey
8758 violet			