


## OPTICAL GROUND WIRE with capacity up to 48 optical fibres

### TC06582



-not to scale-

#### Cable Design

According to IEC/EN 60794

- **Loose tube:** Laser welded hermetically sealed stainless steel tube filled with hydrogen scavenger and water blocking compound.
- **Aluminium tube:** Seamless Extruded tube
- **Armour:** Layer of metallic wires. Right lay sense (Z).

#### Cable Application

This Optical Ground Wire cable (OPGW) has been custom designed to best match with customer requirements from optical, electrical, mechanical, quality and cost point of view, optimising diameter, weight, breaking load and short circuit capacity.

#### Main mechanical and physical characteristics

No. of Fibres (grouped by 48) <sup>(1)</sup>			48		
No. of Tubes			1		
Stainless steel tube - Ø	mm		3.5		
ALU tube - Ø	mm		5.8		
Armouring 1st layer		4 ACS 20.3% IACS Ø 2.5 mm + 6 AA Ø 2.5 mm			
Cable Diameter	mm		10.8		
Cable Weight	kg / km		281		
Rated tensile strength (RTS)	kN		34		
Max. Recommended load	kN		13.6		
Max. Allowable Tension (MAT)	kN		23.5		
Nominal installation force	kN		5.0		
Max. installation force	kN		6.7		
Elasticity modulus <sup>(2)</sup>	kN/mm <sup>2</sup>		87.4		
Effective section <sup>(2)</sup>	mm <sup>2</sup>		65.3		
Linear thermal elongation coefficient	1E-6/°C		17.6		
<b>Minimum Bending Radius.</b>	mm	On pulley blocks <sup>(3)</sup> : 400	On pulley blocks (others): 300	After clamping (slack cable): 300	On tensioner devices: 450
<b>Temperature Range</b>	°C	Installation -20 -> +50	Transport. & Storage -40 -> +80		Operation -40 -> +80

(1) other configurations upon specific request.

(2) for stress-strain computation.

(3) first and last of each reel, span ≥ 600 m or angles > 15°

#### Main electrical characteristics

Electrical resistance (20°C)	Ω/km		0.62
Initial temperature for short-circuit	°C		20
Final temperature for short-circuit	°C		180
Short circuit rating	kA2s		37.2
Short circuit current for 1 s	kA		6.1

## Optical Characteristics

See the attached cabled optical fibre data sheet.

## Identification

### Fibre Colours

No.	1	2	3	4	5	6	7	8	9	10	11	12
Colour	blue	orange	green	brown	slate	white	red	black	yellow	violet	rose	aqua

### Bundle Colours

No.	1	2	3	4
Colour	blue	orange	green	brown

## Routine test

100% of optical fibres will be measured by OTDR technique before leaving factory

## Installation

Prysmian Group recommends installing the cable described in this specification following the latest version of our "Installation procedures for OPGW fibre optic cable" reference SIG-07-PE-PA-013, "Instruction for the installation of the EWMJ joint box" reference FO-02 and "Instruction for the installation of the EWJ joint box" reference FO-01.


## Logistic

**Packing:** Wooden drums.

### NOTE:

Ordered lengths should include a distribution of lengths, i.e., all reels cannot be ordered at the maximum.

	Type X	Type N
Wheel (A):	1300 mm	1700 mm
Cylinder (B):	800 mm	900 mm
Inside (C):	930 mm	878 mm
Outside (D):	1050 mm	1050 mm
Axe (H):	105 mm	105 mm
Weight:		
- empty:	205 kg	350 kg
- full:	1610 kg	2600 Kg
Maximum length:	5000 m	8000 m
Tolerance length of the produced reel: $\pm 3\%$		

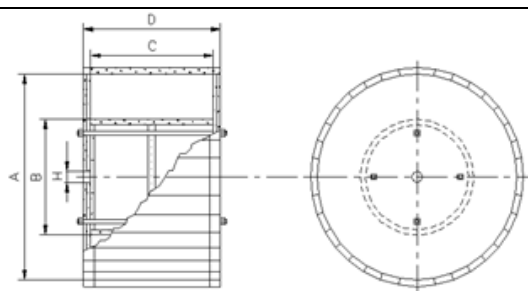

© PrysmianGroup 2021, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by PrysmianGroup: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of PrysmianGroup. The information is believed to be correct at the time of issue. PrysmianGroup reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by PrysmianGroup.