

N-LINE FQ/IX Easy™

N-LINE FQ/IX EASY 5G1,5 16-100 krt.

Nexans Ref.: 10574196

Country Ref.: 28 137 59

EAN 13: 7045210134667

Halogen-free corrugated installation PP conduit. H07Z1-R (FQ EASY) is a halogen free, HFFR insulated house wiring cable. The cable is made of low friction insulation material and class 2 stranded wires.


DESCRIPTION

Pre-wired FQ/IX Easy™ in 16 mm corrugated conduit. H07Z1-R (FQ/IX Easy™) is a halogen-free, HFFR-insulated house wiring cable with extremely low-friction material and a circular stranded copper conductor. The cable meets fire requirements according to CPR class Dcas2d2a2. In the event of a fire, the cable emits no corrosive gases and has little smoke. FQ Easy™ is approved by Intertek.

The halogen-free PP (polypropylene) corrugated conduits are intended for recessed installation, laying on cable ladders and casting in concrete. The product will be delivered in a flexible and user-friendly packaging, Cable Guy, that simplifies the installation work significantly, alternatively on the cable drum that fits in Nexans' drum trolley, Cable Walker.

Colour combinations:

- 3 cores: Brown - blue - green/yellow
- 4 cores: Brown - blue - black - green/yellow
- 5 cores: Brown - blue - black - grey - green/yellow
- 6 cores: Brown - blue - black - grey - white - green/yellow
- 7 cores: Brown - blue - black - grey - white - orange - green/yellow

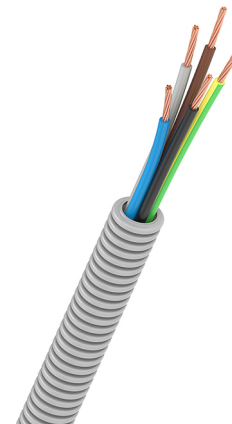

DECLARATION OF PERFORMANCE

Dca-s2,d2,a2

STANDARDS

International EN 50525-3-31;
IEC 60332-1-2; IEC 60754;
IEC 61034



Conductor flexibility
Stranded class 2



Lead free
Yes



Rated Voltage Uo/U (Um)
450 / 750 V



Flame retardant
IEC 60332-1



Max.conductor temp.in service
70 °C



RoHS compliant
Yes

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 9/27/23 www.nexans.no Page 1 / 2

 Nexans

CHARACTERISTICS

Construction characteristics

Conductor flexibility	Stranded class 2
Conductor material	Copper class 2
Conductor shape	Circular
Conduit colour	Grey
Core identification	Blue, brown, black, grey, green / yellow
Insulation	Halogen free compound
Lead free	Yes
Type of conductor	Stranded, class 2
With Green/Yellow core	Yes

Dimensional characteristics

Approximate weight	15.0 kg/100m
Conductor diameter	1.6 mm
Approximate weight	150 kg/km
Conductor cross-section	1.5 mm²
Conduit diameter	16 mm
Nominal outer diameter	3.0 mm
Number of cores	5

Electrical characteristics

Rated Voltage U _o /U (U _m)	450 / 750 V
---	-------------

Mechanical characteristics

Conduit cold impact (IEC-EN 61386-1)	-25 °C
Conduit compression resistance (ICTA-3)	750 N

Usage characteristics

Conduit fire resistance (IEC-EN 61386-1)	Yes
Flame retardant	IEC 60332-1
Length	100 m
Max. conductor temperature in service	70 °C
RoHS compliant	Yes