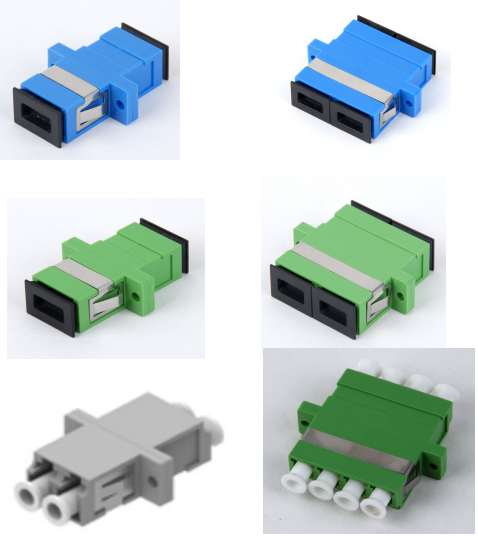


## Specifications for Adaptors

<p><b>Applications:</b>          Data communication          Telephone communication Network          Test equipment LAN          Fiber optic CATV</p>	
<p><b>Features:</b></p>	
<p>Low Insertion Loss,          High reliability and stability          Excellent Exchangeability</p>	

### Optical Performance

<u>FC, SC, ST, LC</u>					
Parameter	Unit	Single Mode			Multimode
		PC	UPC	APC	
Insertion Loss	dB	≤0.2	≤0.2	≤0.2	≤0.3
Return Loss	dB	NA			
Repeatability	dB	≤0.1(500 times)			
Interchange ability	dB	≤0.1(500 times)			
Connection durability	times	≥100			
Relative humidity	%	95			
Operating Temperature	°C	-40~+75			
Storage Temperature	°C	-40~+85			

### Material

ITEM	MATERIAL
Ferrule	Zirconia
Housing for adaptor	PC
Clamp	Stainless steel