

Multi Loose Tube Cable

ID: **Z350**




KABELOVNA Děčín Podmokly s.r.o.
Ústecká 840/33, 405 33 Děčín 5
Czech Republic
DIČ CZ26759993
tel.: +420 412 706 222
www.kabelovna.cz

9. 11. 2022 ver.5

J/A-DQ(BN)H 36×2,5 max. 864F

This cable is suitable for indoor or outdoor use. The cable has standard level of rodent protection.

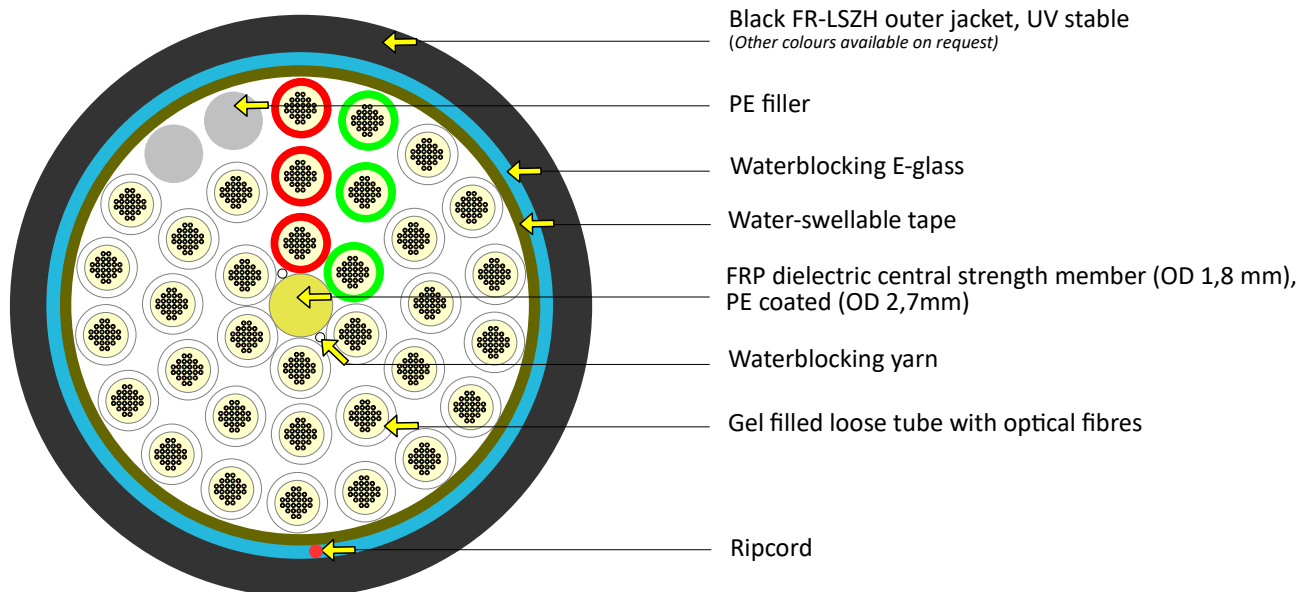

The picture represents a cable with 816 optical fibres.

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	21,6 ± 0,4	mm	EN 60811-203
Cable weight	407	kg/km	
Outer jacket thickness	1,5	mm	
Loose tube diameter	2,5	mm	
Max. tensile strength	4700	N	EN 60794-1-21-E1
Crush resistance test	2000	N	EN 60794-1-21-E3
Impact resistance test	5	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	30	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	40	× OD	EN 60794-1-21-E11b
Temperature range	Installation	-15 to +50	EN 60794-1-22-F1
	Operation	-30 to +70	
	Storage	-30 to +70	
Fire properties – Flammability	pass		EN60332-3-22 (cat.A)
Fire properties – Acid gases	pass		EN 60754-1, EN 60754-2
Fire properties – Smoke density	pass		EN 61034-1, EN 60754-2

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

According to IEC 60304

1 Red	7 Brown	13 Red*	19 Brown*
2 Green	8 Violet	14 Green*	20 Violet*
3 Blue	9 Turquoise	15 Blue*	21 Turquoise*
4 Yellow	10 Black	16 Yellow*	22 Natural
5 White	11 Orange	17 White*	23 Orange*
6 Grey	12 Pink	18 Grey*	24 Pink*

* with black rings

Other fibre colour sequences available on request

Tube colour coding

1 Red	7 Red	19 Red
2 Green	8 Green	20 Green
3-6 White	9-18 White	21-36 White

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Packing

Depending on ordered put-up lengths

