


A-DQ(ZN)2Y max. 24F

This cable is suitable for outdoor installation.

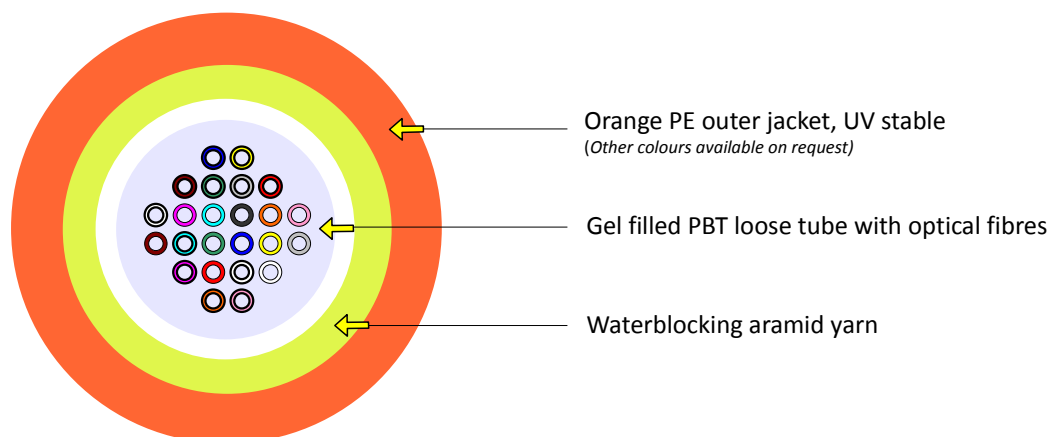

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	3,5 ± 0,1	mm	EN 60811-203
Cable weight	11	kg/km	
Outer jacket thickness	0,45	mm	
Loose tube diameter	2,5	mm	
Max. tensile strength	250	N	EN 60794-1-21-E1
Crush resistance test	700	N	EN 60794-1-21-E3
Impact resistance test	5	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	20	× OD	EN 60794-1-21-E11b
Temperature range	Installation	-15 to +50 °C	EN 60794-1-22-F1
	Operation	-20 to +70 °C	
	Storage	-20 to +70 °C	

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

1	White	7	Brown	13	White*	19	Brown*
2	Red	8	Black	14	Red*	20	Black*
3	Yellow	9	Violet	15	Yellow*	21	Violet*
4	Green	10	Turquoise	16	Green*	22	Turquoise*
5	Blue	11	Orange	17	Blue*	23	Orange*
6	Grey	12	Pink	18	Grey*	24	Pink*

*with black rings

Other fibre colour sequences available on request

Packing

Depending on ordered put-up lengths

