


SCANSTRIP	71016-01	71032-01	71284-01
	71010-01	71017-01	71033-01
	71011-01	71018-01	71964-01
	71012-01	71019-01	71034-01
	71013-01	71020-01	71966-01
	71014-01	71021-01	71035-01
	71015-01	71030-01	71022-01
		71221-01	71968-01
			71973-01
			71974-01

71222-01


71283-01

NO: Skal installeres av autorisert elektriker.
SE: Installationen ska utföras av behörig elektriker.
FI: Asennuksen saa tehdä vain valtuutettu sähköasentaja.
EN: Installation should be performed by a qualified electrician.

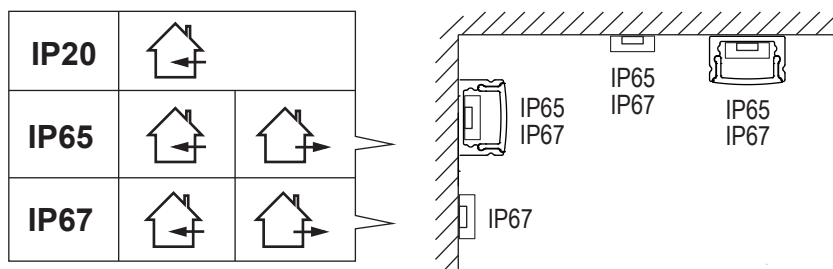

Aneta aluminium profiles:

Profile	GLOW IP20	GLOW IP65	GLOW IP67	BRIGHT IP20	BRIGHT IP65	BRIGHT IP67	POWER IP20	COB IP20	DUAL-WHITE IP20	RGBW COB IP20	RGBW IP67	COB slimline IP20
RECESSED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SLIM	✓	✓		✓	✓		✓	✓	✓	✓		✓
DEEP	✓	✓		✓	✓		✓	✓	✓	✓		✓
XL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
FLOOR	✓	✓		✓	✓		✓	✓	✓	✓		✓
TILE	✓	✓		✓	✓		✓	✓	✓	✓		✓
CORNER	✓	✓		✓	✓		✓	✓	✓	✓		✓
PLASTERBOARD	✓	✓		✓	✓		✓	✓	✓	✓		✓
PLASTERBOARD XL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
NARROW												✓

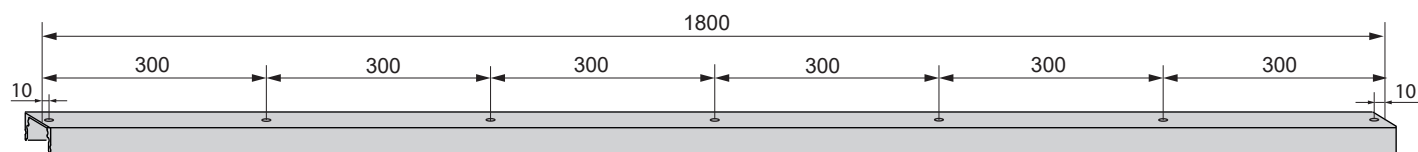

SCANSTRIP DRIVER WIRE RUN LENGTH INDICATION TABLE

Name	Scissors	Eye
GLOW	62,5mm	60mm
BRIGHT	50mm	60mm
POWER	50mm	100mm
COB	50mm	20mm
DUAL WHITE	38,5mm	100mm
RGBW	62,6mm	100mm
COB RGBW	33,33mm	60mm
COB slimline 4W	50mm	20mm
COB slimline 10W	41,7mm	20mm

Scanstrip	Load	0,34mm²	0,5mm²	0,75mm²	1mm²	1,5mm²	2,5mm²
DIM12	9,6W	30m	40m	61m	97m	126m	190m
DIM25	20W	14m	20m	30m	45m	61m	91m
DIM50	40W	7m	10m	14m	21m	30m	45m
DIM100	80W	3m	5m	7m	10m	15m	22m
DIM200	160W	1,5m	2m	3m	5m	7m	11m
CTR18	14,4W	19m	27m	41m	62m	84m	126m
CTR40	32W	9m	13m	19m	29m	44m	66m
CTR75	60W	5m	7m	10m	14m	22m	33m
CTR150	120W	2,5m	4m	5m	7m	11m	16m




Voltage drop = $\frac{2 \times \text{length} \times \text{amps} \times \text{resistance}}{\text{cross section}}$

SCANSTRIP QUICK

PLUG & PLAY




QUICK CONNECT




Scanstrip QUICK connectors

Product	Type	LED-strip	Width/type	L	W	H
1CCT strip2strip	Splice	Single colour, 2pin	10mm COB/SMD	13,5mm	11,5mm	4,9mm
1CCT strip2wire	Connection 0,5mm²	Single colour, 2pin	10mm COB/SMD	13,5mm	11,5mm	5,4mm
1CCT corner	Corner splice	Single colour, 2pin	10mm COB/SMD	21,7mm	18,4mm	4,7mm
RGBW strip2strip	Splice	RGBW, 5pin	12mm COB	13,5mm	13,8mm	4,9mm
RGBW strip2wire	Connection 0,34mm²	RGBW, 5pin	12mm COB	13,5mm	13,8mm	5,4mm


NB - Soldering is always advised

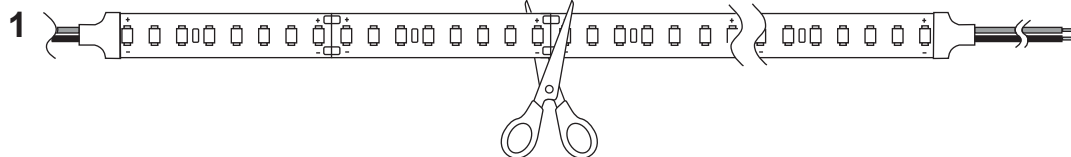


IP67

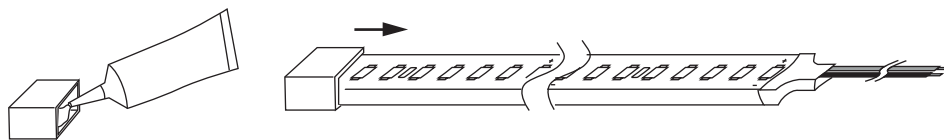


2

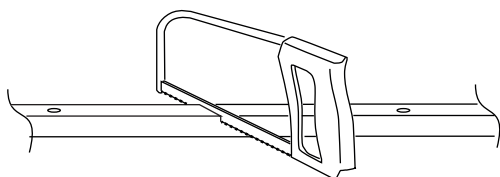


3

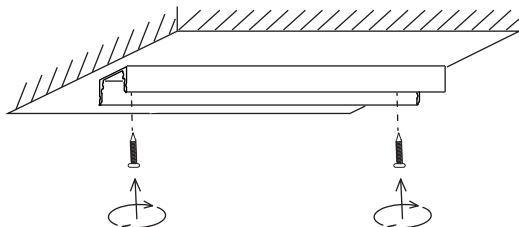


4

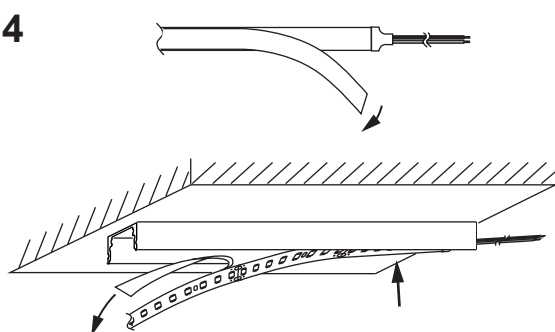





5

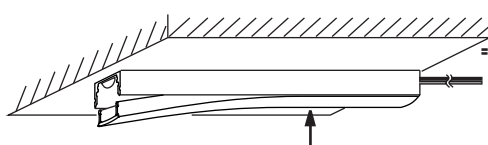


2

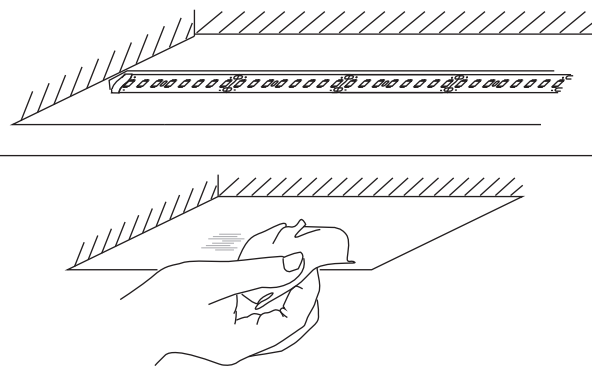


3

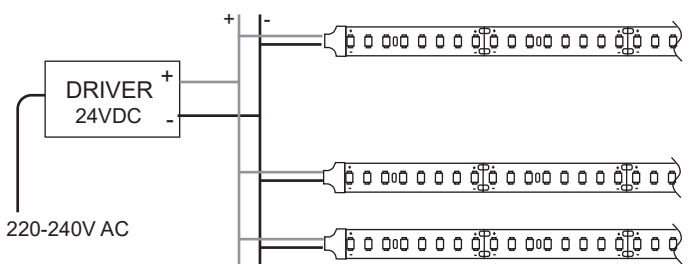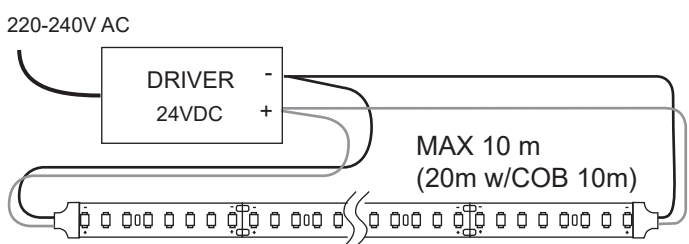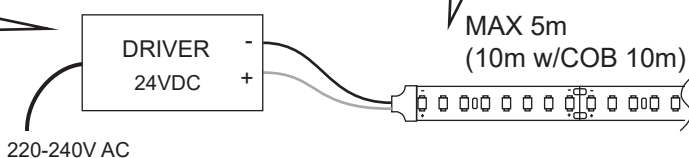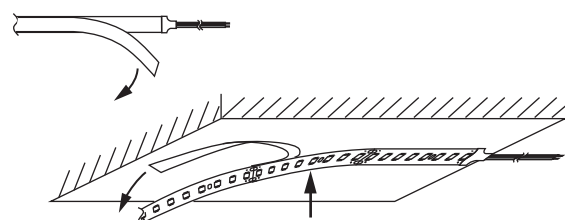


GLOW / BRIGHT / POWER / COB



DUAL WHITE



RGBW / COB RGBW

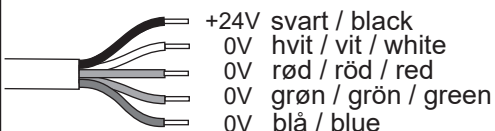

24V dimmable drivers	Wattage	Item No.
Scanstrip DIM12 IP65	2.5-12 W	71060-01
Scanstrip DIM25	2.5-25 W	71061-01
Scanstrip DIM50	12-50 W	71062-01
Scanstrip DIM100	34-100 W	71063-01
Scanstrip DIM200 IP67	67-200 W	71064-27

24V NONdim Drivers	Wattage	Item No.
Scanstrip CTR18	0-18 W	71158-01
Scanstrip CTR40	0-40 W	71159-01
Scanstrip CTR75	0-75 W	71160-01
Scanstrip CTR150	0-150 W	71162-01