




CS-NZ35YKE + CU-NZ35YKE



Bringer naturens balanse innendørs

nanoe⁺ X, en teknologi med fordelene til hydroksylradikaler. Hydroksylradikaler (også kalt OH-radikaler) finnes i rikelige mengder i naturen og bekjemper forurensning, virus og bakterier, samtidig som de rengjør og fjerner vond lukt. nanoe⁺ X-teknologi kan gi disse utrolige fordelene innendørs, slik at harde overflater, myke møbler og innemiljøet blir renere og mer behagelig ? hjemme, på jobben, på hoteller, i butikker, på restauranter osv.

[LÄS MER](#)

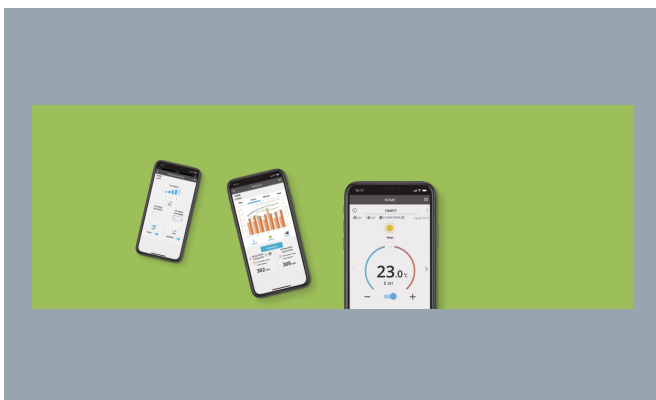

Panasonic Comfort Cloud-appen. Praktisk sentral ko?ntroll

[FINN UT MER](#)



Ny talestyring

Full kontroll og håndfri hjelp som gir full tilgang til funksjonene i klimaanlegget.

[FINN UT MER](#)



Etherea NZ med nanoe⁺ X-teknologi

Kraftig, effektiv og pålitelig året rundt. NZ-serien er laget spesielt for det tøffe nordiske klimaet. Den smarte designen gjør NZ perfekt som erstatningspumpe!

[FINN UT MER](#)

Panasonic NZ25YKE Etherea Inverter+ - R32		
		3.50 kW
Maximum capacity	kW	7,40kW
Reference		CS-NZ35YKE + CU-NZ35YKE
Heating capacity (Nominal)	kW	4,00
Heating capacity (Min)	kW	0,85
Heating capacity (Max)	kW	7,40
COP (1)	W/W	4,65
Heating capacity at -7°C (2)	kW	4,63
COP at -7°C (1)	W/W	2,50
Heating capacity at -15°C (2)	kW	4,23
COP at -15°C (1)	W/W	2,42
Heating capacity at -20°C (2)	kW	3,63
COP at -20°C (1)	W/W	2,21
Heating capacity at -25°C (2)	kW	3,03
COP at -25°C (1)	W/W	2,13
SCOP (3)		5,00 A++
Pdesign at -10°C	kW	3,60
Input power heating (Nominal)	kW	0,86
Input power heating (Min)	kW	0,17
Input power heating (Max)	kW	2,35
Annual energy consumption heating (4)	kWh/a	1.008
Cooling capacity (Nominal)	kW	3,50
Cooling capacity (Min)	kW	0,85
Cooling capacity (Max)	kW	4,00
SEER (3)		8,00 A++
Pdesign (cooling)	kW	3,50
Input power cooling (Nominal)	kW	0,85
Input power cooling (Min)	kW	0,17
Input power cooling (Max)	kW	1,10

Panasonic NZ25YKE Etherea Inverter+ - R32		
		3.50 kW
Annual energy consumption cooling (4)	kWh/a	153
Indoor unit		CS-NZ35YKE
Indoor power source	V	230
Indoor air flow (Heat)	m ³ /min	15,0
Indoor air flow (Cool)	m ³ /min	13,0
Moisture removal volume	L/h	2,0
Indoor sound pressure (Heat -Hi) (5)	dB(A)	44
Indoor sound pressure (Heat -Lo) (5)	dB(A)	30
Indoor sound pressure (Heat -Q-Lo) (5)	dB(A)	19
Indoor sound pressure (Cool -Hi) (5)	dB(A)	42
Indoor sound pressure (Cool -Lo) (5)	dB(A)	28
Indoor sound pressure (Cool -Q-Lo) (5)	dB(A)	21
Indoor dimension (Height)	mm	295
Indoor dimension (Width)	mm	870
Indoor dimension (Depth)	mm	229
Indoor net weight	kg	10
nanoe X Generator		Mark 2
Outdoor unit		CU-NZ35YKE
Outdoor air flow (Heat)	m ³ /min	34,4
Outdoor air flow (Cool)	m ³ /min	34,4
Outdoor sound pressure (Heat -Hi) (5)	dB(A)	50
Outdoor sound pressure (Heat -Lo) (5)	dB(A)	47
Outdoor sound pressure (Cool -Hi) (5)	dB(A)	48
Outdoor sound pressure (Cool -Lo) (5)	dB(A)	45
Outdoor dimension (Height) (6)	mm	622
Outdoor dimension (Width) (6)	mm	824

Panasonic NZ25YKE Etherea Inverter+ - R32		3.50 kW
Outdoor dimension (Depth) (6)	mm	299
Outdoor net weight	kg	34
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)
Pipe length range	m	3 ~ 20
Elevation difference (in/out) (7)	m	10
Pipe length for additional gas	m	7,5
Additional gas amount	g/m	10
Refrigerant (R32) / CO2 Eq.	kg / T	0,82 / 0,5535
Operating range (Heat - Min)	°C	-25
Operating range (Heat - Max)	°C	+24
Operating range (Cool - Min)	°C	-15
Operating range (Cool - Max)	°C	+43