
Ring type thimbles for suspension rods for ADSS



Application
Movable suspension of ADSS cables together with suspension rods

Material / Surface
Thimbles: Steel, hot dip galvanized

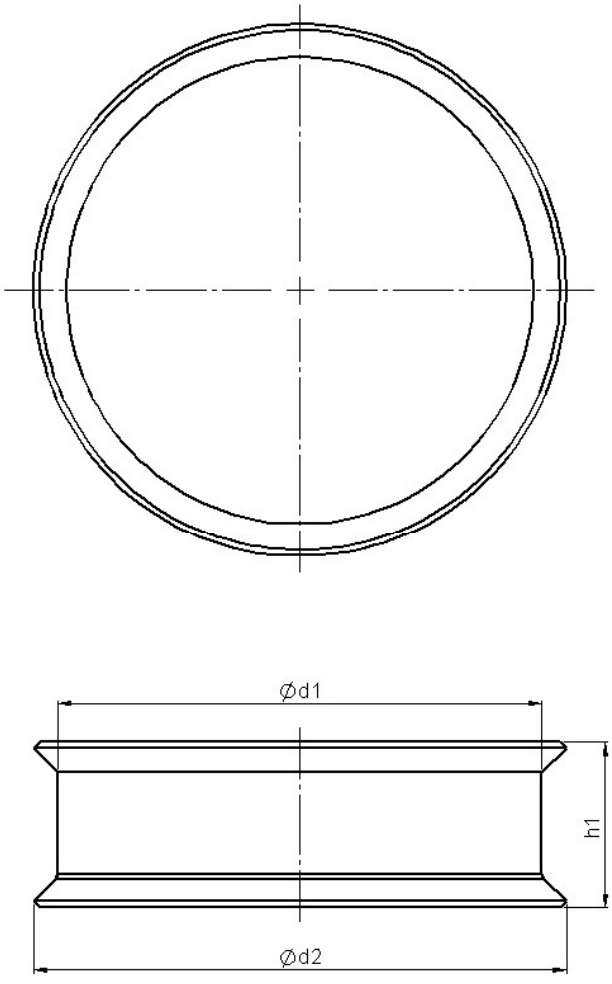

Picture may differ

Ring type thimbles for suspension rods for ADSS

Item no.	d1	d2	h1 [mm]	Connectivity	Weight
E05119	55	61	19	TG - LG – rods	0,04
F12006	80	88	30	TG - UTA – rods	0,10

If the version you need is not listed, please contact **elektroarmaturen@ribe.de**

Additional information

The loop of the suspension rods is stabilized and protected against abrasion with ring type thimbles.

RIBE ADSS fittings

	Item	Part name	Ribe - No.	Fiber Counts	for nominal Cable diameter	Span lenght (Max)	Max inst. (N)	CBL (N)	tension test (done or not) *
Suspension fittings	1	Tower attachment	B873016A03KB						
	2	Suspension rods	TG075091	2C, 4C	6,91-7,5	up to70m	3 400	7 000	
	2	Suspension rods	TG082092	8C, 12C	7,51-8,2	up to70m	3 600	8 500	
	2	Suspension rods	TG102096	12, 36, 48, 72C	9,51-10,2	up to70m	2 700	10 700	
	2	Suspension rods	TG120098	96C	11,41-12,0	up to70m	3 000	12 500	
	2	Suspension rods	TG150101	144C 192C, 216C	14,41-15,0	up to70m	3 300	16 000	
	2	Suspension rods	TG174122	288C	16,81-17,4	up to70m	8 200	19 000	
	2	Suspension rods	TG204125	372C, 384C, 396C, 408C, 420C,732C	19,81-20,4	up to70m	9 000	20 000	
	3	Supporting rods	LGO82046s	8C, 12C	7,51-8,2	up to70m	3 600	8 500	
	3	Supporting rods	LG075046s	2C, 4C	6,91-7,5	up to70m	3 400	7 000	
	3	Supporting rods	LG102048S	12, 36, 48, 72C	9,51-10,2	up to70m	2 700	10 700	
	3	Supporting rods	LG120049s	96C	11,41-12,0	up to70m	3 000	12 500	
	3	Supporting rods	LG150051s	144C 192C, 216C	14,41-15,0	up to70m	3 300	16 000	
	3	Supporting rods	LG174073s	288C	16,81-17,4	up to70m	8 200	19 000	
	3	Supporting rods	LG204075s	372C, 384C, 396C, 408C, 420C,732C	19,81-20,4	up to70m	9 000	20 000	
	4	Ring type thimble **for cable types 2C up to 216C - for diameters 6,91-15,0 mm**	E05119						

RIBE ADSS fittings

	Item	Part name	Ribe - No.	Fiber Counts	for nominal Cable diameter	Span lenght (Max)	Max inst. (N)	CBL (N)	tension test (done or not) *
Suspension fittings	4	Ring type thimble **for cable types 288C up to 732C for diameters 16,81-20,4 mm**	F12006						
	5	Steel tape (Order separate) **- 50 m**	B841003T7						
	6	Fixing clip for steel tape	B841003T8						
		Set price							
Tension fittings	1	Tower attachment	B873016A04KB						
	2	Helical dead end	AG065047s	G1-G12	6,09-6,57	not speci.	not speci.	not speci.	not tested
	2	Helical dead end	AG080058s	2C, 4C 8C, 12C	7,31-8,00 7,31-8,00	up to 150m up to 150m	3400 3600	7000 8500	**tested LB15244-20**
	2	Helical dead end	AG105067s	12, 36, 48, 72C	9,73-10,51	up to 150m	2 700	10 700	**tested LB15244-20**
	2	Helical dead end	AG122078s	96C	11,37-12,28	up to 150m	3 000	12 500	**tested LB15244-20**
	2	Helical dead end	AG155093s	144C 192C, 216C	14,36-15,50	up to 150m	3 300	16 000	not tested
	2	Helical dead end	AG181108s	288C	16,76-18,11	up to 150m	8 200	19 000	not tested
	2	Helical dead end	AG211126s	372C, 384C, 396C, 408C, 420C,732C	19,58-21,14	up to 150m	9 000	20 000	**tested LB15244-20**
	3	Thimble **for cable types G1-12 for diameters 2,0-7,5mm**	B822001						

RIBE ADSS fittings

	Item	Part name	Ribe - No.	Fiber Counts	for nominal Cable diameter	Span lenght (Max)	Max inst. (N)	CBL (N)	tension test (done or not) *
Tension fittings	3	Thimble **for cable types 2C up to 96C - for diameters 7,31-12,28 mm**	B822002						
	3	Thimble **for cable types 144C up to 732C - for diameters 14,36-21,14 mm**	F10186						
	4	Steel tape (Order separate) **- 50 m**	B841003T7						
	5	Fixing clip for steel tape	B841003T8						
		Set price							
		Steel tape L=50m roll	B841003T7						
Down lead clamps	1	Down lead clamp	B844008KB.A../B..						
	2	Steel tape (Order separate) **- 50 m**	B841003T7						
	3	Fixing clip for steel tape	B841003T8						
		Set price							
Down lead clamps wooden pole	1	Fixing clamp	B844003.A../B..						