

Environmental product declaration

In accordance with 14025 and EN15804+A2

i60-600 LED 2900 HF OP



Owner of the declaration:

Glamox AS

Product:

i60-600 LED 2900 HF OP

Declared unit:

1 pcs

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR

IBU PCR - Part B for luminaires, lamps, and components for luminaires

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-4531-3787-EN

Registration number:

NEPD-4531-3787-EN

Issue date: 02.06.2023

Valid to: 02.06.2028

EPD Software:

LCA.no EPD generator ID: 62998

The Norwegian EPD Foundation

General information

Product

i60-600 LED 2900 HF OP

Program operator:

Post Box 5250 Majorstuen, 0303 Oslo, Norway
The Norwegian EPD Foundation
Phone: +47 23 08 80 00
web: post@epd-norge.no

Declaration number: NEPD-4531-3787-EN

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
IBU PCR - Part B for luminaires, lamps, and components for
luminaires

Statement of liability:

The owner of the declaration shall be liable for the underlying
information and evidence. EPD Norway shall not be liable with respect
to manufacturer information, life cycle assessment data and
evidences.

Declared unit:

1 pcs i60-600 LED 2900 HF OP

Declared unit with option:

A1,A2,A3,A4,A5,B6,C1,C2,C3,C4,D

Functional unit:

1 pc i60-600 luminaire manufactured in Glamox Molde. Transport to
costumer, installed and used according to a specific lighting regime
over 20-years lifetime. Including waste treatment at end-of-life.

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information
and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4.
Individual third party verification of each EPD is not required when the
EPD tool is i integrated into the company's environmental
management system, ii the procedures for use of the EPD tool are
approved by EPDNorway, and iii the process is reviewed annually. See
Appendix G of EPD-Norway's General Programme Instructions for
further information on EPD tools.

Verification of EPD tool:

Independent third party verification of the EPD tool, background data
and test-EPD in accordance with EPDNorway's procedures and
guidelines for verification and approval of EPD tools. Approval
number: NEPDT41.

Third party verifier:

Owner of the declaration:

Glamox AS
Contact person: Birger Holo
Phone: +47 97551574
e-mail: birger.holo@glamox.com

Manufacturer:

Glamox AS
Birger Hatlebakks veg 15
6415 Molde, Norway

Place of production:

Glamox production site Molde (Norway)
Birger Hatlebakks veg 15
6415 Molde, Norway

Management system:

Factory Molde: ISO 9001, ISO 14001, ATEX, ISO 80079-34 (IECEX
Factory Kirkenær: ISO 9001, ISO 14001, ISO 13485; Factory Keila:
ISO 9001, ISO 14001, ISO 45001, ISO 50001.

Organisation no:

912007782

Issue date: 02.06.2023

Valid to: 02.06.2028

Year of study:

2022

Comparability:

EPD of construction products may not be comparable if they not
comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2021.09,
developed by LCA.no. The EPD tool is integrated in the company's
management system, and has been approved by EPD Norway.
NEPDT42

Developer of EPD: Marthe Øyen Gaasø

Reviewer of company-specific input data and EPD: Jonny A. Strømme

Approved:



Håkon Hauan
Managing Director of EPD-Norway

Product

Product description:

Glamox i60 is a flexible and streamlined splash proof LED luminaire for interiors and industry. The luminaire housing is made of galvanized pre-painted steel with a second layer of white epoxy/polyester powder coated finish to achieve extra protection against corrosion. End caps in injection molded ASA with integrated locking device to prevent the luminaire being opened without any tools. The diffuser is made of extruded fire rated opal PC.

This environmental product declaration can be used for the following luminaires:

i60095476 - i60-600 LED 2900 HF 830 OP

i60095477 - i60-600 LED 2900 HF 840 OP

Product specification

Materials	kg	%
Coating materials	0,02	1,32
Electronic - Auxiliaries	0,00	0,20
Electronic - Cable	0,01	0,56
Electronic - Connector	0,02	1,04
Metal - Steel	0,94	54,57
Electronic - LED chip	0,00	0,01
Plastic - Acrylonitrile styrene acrylate (ASA)	0,18	10,66
Electronic - LED driver	0,20	11,30
Plastic - Polyoxymethylene (POM)	0,00	0,03
Electronic - LED plate	0,06	3,39
Rubber, synthetic	0,00	0,21
Electronic - Resistor	0,00	0,01
Plastic - Polycarbonate (PC)	0,29	16,69
Total	1,73	

Packaging	kg	%
Packaging - Paper	0,03	23,53
Packaging - Plastic	0,04	31,76
Packaging - Polystyrene	0,06	44,71
Total incl. packaging	1,85	

Technical data:

Please visit the product page on our website for more technical information.

Market:

Nordic

Reference service life, product

20 years lifetime for the installation according to the used scenario.

Reference service life, building or construction works

60 years. Standard service life for buildings according to PCR Part A of EPD Norway.

LCA: Calculation rules

Declared unit:

1 pcs i60-600 LED 2900 HF OP

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) can be excluded. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Coating materials	Ecoinvent 3.6	Database	2019
Electronic - Connector	ecoinvent 3.6	Database	2019
Electronic - LED plate	ecoinvent 3.6	Database	2019
Electronic - Resistor	ecoinvent 3.6	Database	2019
Metal - Steel	ecoinvent 3.6	Database	2019
Packaging - Paper	ecoinvent 3.6	Database	2019
Packaging - Plastic	ecoinvent 3.6	Database	2019
Packaging - Polystyrene	ecoinvent 3.6	Database	2019
Plastic - Acrylonitrile styrene acrylate (ASA)	ecoinvent 3.6	Database	2019
Plastic - Polycarbonate (PC)	ecoinvent 3.6	Database	2019
Plastic - Polyoxymethylene (POM)	ecoinvent 3.6	Database	2019
Rubber, synthetic	ecoinvent 3.6	Database	2019
Metal - Steel	EPD S-P-01921 + ecoinvent 3.6	EPD + database	2020
Electronic - Cable	Material composition + ecoinvent 3.6	Supplier data + database	2019
Electronic - LED driver	Material composition + ecoinvent 3.6	Supplier data + database	2019
Electronic - Auxiliaries	Modified ecoinvent 3.6	Database	2019
Electronic - LED chip	Scholand et al. (2012) + Ecoinvent 3.6	Scientific literature + database	2017

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	X	MND	X	X	X	X	X

System boundary:


The analysis is a cradle-to-grave study of one luminaire manufactured and installed, used according to a specific lighting regime over a specific lifetime, including waste treatment at end-of-life.

A1-A5 includes the extraction and production of raw materials, transportation to the production site, the production process itself, transport to the market and assembly.

B6 is the operational energy use stage of the luminaire based on a scenario.

C1-C4 includes de-installation of the luminaire, average transport between building site and waste treatment facility, waste processing and disposal. Waste treatment of the product follows the default values provided in EN 50693.

D shows the recyclability of metals and plastics, and allows the producers a credit for the net scrap that is produced at the end of a product's life. The benefits from recycling of net scrap are described in formula from EN 15804:2012+A2:2019. Substitution of heat and electricity generated by the incineration with energy recovery of plastic insulation and other parts is also calculated in module D.

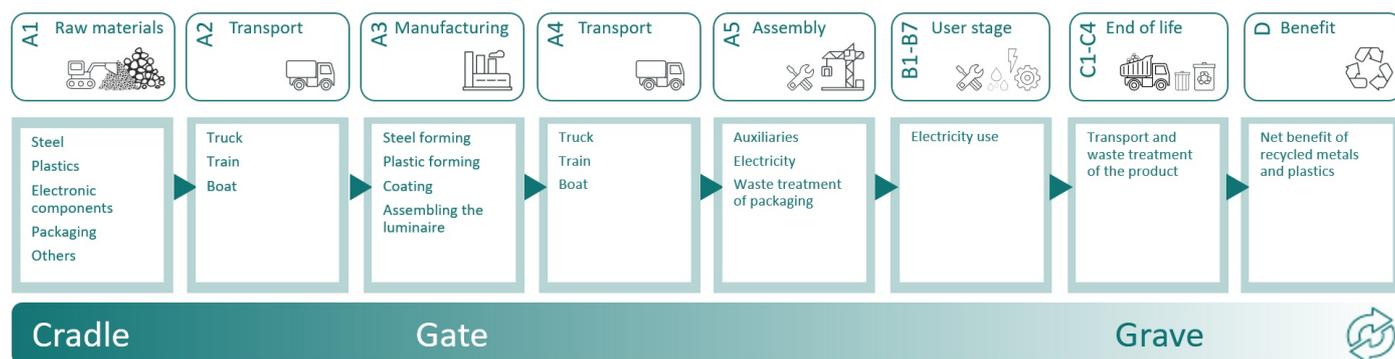

Additional technical information:

Please visit our website www.glamox.com for more technical information.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Module A4:

Transport from manufacturing location in Molde to warehouse in Oslo (495 km) + average distribution into the Nordic market (500 km).

Module B6:

The operational energy use of the luminaire is calculated based on the methodology provided in IBU PCR Part B for luminaires, lamps, and components for luminaires. The energy consumption model for luminaire used in the PCR follows the application scenarios developed in EN 15193:2007. To calculate the electricity use of the luminaire, the following scenario parameters have been applied:

- User scenario = manufacture
- Active power of the luminaire (Pa) = 23 watt
- Passive power of the luminaire (Pp) = 0 watt
- Daylight time usage (tD) = 2500 hours
- Non-daylight time usage (tN) = 1500 hours
- Standard year time (ty) = 8760 hours
- The occupancy dependency factor (FO) = 1 (factor, no unit)
- The daylight dependency factor (FD) = 1 (factor, no unit)
- The product specific constant illuminance factor (FCP) = 1 (factor, no unit)
- The non-daylight dimming factor (FN) = 1 (factor, no unit)
- The application specific empiric lifetime of the luminaire in years (a) = 20 years (corresponding to the reference service life of the product)

Module C2:

Average transport to Nordic waste treatment facilities (300km).

Modules C3 and C4:

Waste treatment of the product follows the default values provided in EN 50693, Product Category Rules for life cycle assessments of electronic and electrical products and systems, table G.4. This table specified how different types of raw materials used in A1 will likely be treated during the end-of-life of the product. Waste treatments in C3 include material recycling and incineration with and without energy recovery and fly ash extraction. Disposal in C4 consist of landfilling of different waste fractions and of ashes.

Module D:

The recyclability of metals, plastics, and electronic components allows the producers a credit for the net scrap that is produced at the end of a product's life. The benefits from recycling of net scrap are described in formula from EN 15804:2012+A2:2019. Substitution of heat and electricity generated by the incineration with energy recovery of plastic insulation and other parts is also calculated in module D.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, 16-32 tonnes, EURO 5 (km)	36,7 %	995	0,044	l/tkm	43,78
Assembly (A5)		Unit	Value		
Waste, cardboard and paper, to average treatment - A5 including transport (kg)	kg	0,03			
Waste, plastic, mixture, to average treatment - A5 including transport (kg)	kg	0,10			
Operational energy (B6)		Unit	Value		
Electricity, Nordic (kWh)	kWh/DU	1840,00			
Transport to waste processing (C2)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, over 32 tonnes, EURO 5 (km)	53,3 %	300	0,023	l/tkm	6,90

Waste processing (C3)	Unit	Value			
	kg	0,02			
Copper to recycling (kg)	kg	0,00			
Steel to recycling (kg)	kg	0,82			
Waste treatment of hazardous waste, incineration with fly ash extraction (kg)	kg	0,02			
Waste treatment of non-hazardous waste, incineration with energy recovery and fly ash extraction (kg)	kg	0,00			
Waste treatment of plastic mixture, incineration with energy recovery and fly ash extraction (kg)	kg	0,25			
Waste treatment per kg electronics scrap from LED plate, without components, recycling of copper - C3 (kg)	kg	0,03			
Waste treatment per kg electronics scrap from PWB, with components, recycling of metals - C3 (kg)	kg	0,05			
Waste treatment per kg used electronic components, manual separation (kg)	kg	0,20			
Waste treatment per kg used PWB, shredding and separation - C3 (kg)	kg	0,16			

Disposal (C4)	Unit	Value			
Landfilling of ashes from incineration of Hazardous waste, process per kg ashes and residues - C4 (kg)	kg	0,00			
Landfilling of ashes from incineration of Non-hazardous waste, process per kg ashes and residues (kg)	kg	0,00			
Landfilling of ashes from incineration of Plastic mixture, process per kg ashes and residues (kg)	kg	0,01			
Landfilling of copper (kg)	kg	0,00			
Landfilling of hazardous waste (kg)	kg	0,08			
Landfilling of non-hazardous waste (kg)	kg	0,00			
Landfilling of plastic mixture (kg)	kg	0,25			
Landfilling of steel (kg)	kg	0,21			

Benefits and loads beyond the system boundaries (D)	Unit	Value			
Substitution of copper with net scrap from PWB, without components (kg)	kg	0,00			
Substitution of electricity, in Norway (MJ)	MJ	0,39			
Substitution of primary copper with net scrap (kg)	kg	0,00			
Substitution of primary metals with net scrap from PWB, with components (kg)	kg	0,01			
Substitution of primary steel with net scrap (kg)	kg	0,24			
Substitution of thermal energy, district heating, in Norway (MJ)	MJ	5,92			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact								
Indicator		Unit	A1	A2	A3	A4	A5	
	GWP-total	kg CO ₂ -eq	2,41E+01	3,07E-01	3,76E-01	3,08E-01	6,01E-02	
	GWP-fossil	kg CO ₂ -eq	2,40E+01	3,07E-01	3,54E-01	3,07E-01	8,21E-03	
	GWP-biogenic	kg CO ₂ -eq	9,12E-02	1,20E-04	2,04E-02	1,25E-04	5,19E-02	
	GWP-luluc	kg CO ₂ -eq	6,67E-02	1,17E-04	1,03E-03	1,07E-04	7,53E-07	
	ODP	kg CFC11 -eq	1,64E-06	6,92E-08	2,45E-08	7,01E-08	5,66E-10	
	AP	mol H+ -eq	1,91E-01	2,19E-03	3,65E-03	1,26E-03	1,18E-05	
	EP-FreshWater	kg P -eq	2,95E-03	2,28E-06	1,86E-05	2,41E-06	1,99E-08	
	EP-Marine	kg N -eq	2,56E-02	5,99E-04	1,07E-03	3,73E-04	9,47E-06	
	EP-Terrestrial	mol N -eq	3,73E-01	6,64E-03	1,19E-02	4,12E-03	4,23E-05	
	POCP	kg NMVOC -eq	9,48E-02	1,89E-03	3,21E-03	1,26E-03	1,36E-05	
	ADP-minerals&metals ¹	kg Sb -eq	6,90E-03	7,65E-06	1,90E-05	8,33E-06	5,29E-08	
	ADP-fossil ¹	MJ	3,13E+02	4,55E+00	4,09E+00	4,64E+00	3,86E-02	
	WDP ¹	m ³	9,86E+02	4,02E+00	5,78E+02	4,42E+00	1,21E-01	

Indicator		Unit	B6	C1	C2	C3	C4	D
	GWP-total	kg CO ₂ -eq	2,68E+02	0,00E+00	5,06E-02	7,13E-01	5,24E-02	-1,15E+00
	GWP-fossil	kg CO ₂ -eq	2,50E+02	0,00E+00	5,05E-02	7,10E-01	5,09E-02	-1,15E+00
	GWP-biogenic	kg CO ₂ -eq	4,57E+00	0,00E+00	2,07E-05	3,02E-03	1,34E-03	-2,63E-03
	GWP-luluc	kg CO ₂ -eq	1,37E+01	0,00E+00	1,48E-05	1,61E-04	1,52E-04	-2,53E-03
	ODP	kg CFC11 -eq	2,70E-05	0,00E+00	1,17E-08	1,06E-08	2,58E-09	-2,50E-03
	AP	mol H+ -eq	1,15E+00	0,00E+00	2,12E-04	4,37E-04	1,26E-04	-5,67E-02
	EP-FreshWater	kg P -eq	1,65E-02	0,00E+00	3,85E-07	3,21E-06	8,64E-07	-3,26E-04
	EP-Marine	kg N -eq	1,82E-01	0,00E+00	6,39E-05	1,20E-04	6,47E-05	-3,14E-03
	EP-Terrestrial	mol N -eq	2,44E+00	0,00E+00	7,06E-04	1,29E-03	3,55E-04	-4,22E-02
	POCP	kg NMVOC -eq	5,73E-01	0,00E+00	2,27E-04	3,37E-04	1,43E-04	-1,25E-02
	ADP-minerals&metals ¹	kg Sb -eq	3,88E-03	0,00E+00	8,63E-07	6,67E-07	1,43E-07	-1,27E-03
	ADP-fossil ¹	MJ	6,75E+03	0,00E+00	7,86E-01	8,72E-01	3,23E-01	-1,38E+01
	WDP ¹	m ³	5,22E+05	0,00E+00	6,03E-01	6,80E+00	2,65E+00	-1,71E+01

GWP total Global Warming Potential total; GWP fossil Global Warming Potential fossil fuels ; GWP biogenic Global Warming Potential biogenic; GWP luluc Global W Potential land use change; ODP Ozone Depletion; AP Acidification; EP freshwater Eutrophication aquatic freshwater; EP marine Eutrophication aquatic marine; EP terrestrial Eutrophication terrestrial ;POCP Photochemical zone formation; ADPE Abiotic Depletion Potential minerals and metals; ADPf Abiotic Depletion Potential fossil fuels;

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

A luminaire is a product that consumes energy during the use phase. Combined with a relatively long expected lifetime and the environmental impact of generating electricity, the use phase (B6) will normally be the most contributing stage to the overall environmental impact of the declared unit. It is important to be aware that the actual calculations of the effect of B6 is particularly sensitive to which use scenario that is chosen and which energy grid mix that is used.

Additional environmental impact indicators							
Indicator	Unit	A1	A2	A3	A4	A5	
 PM	Disease incidence	1,45E-06	2,03E-08	6,34E-08	2,21E-08	2,05E-10	
 IRP ²	kgBq U235 -eq	1,06E+00	1,99E-02	6,22E-02	2,03E-02	1,73E-04	
 ETP-fw ¹	CTUe	1,39E+03	3,28E+00	1,62E+01	3,41E+00	3,94E-02	
 HTP-c ¹	CTUh	4,11E-08	0,00E+00	7,95E-10	0,00E+00	0,00E+00	
 HTP-nc ¹	CTUh	1,17E-06	3,48E-09	1,90E-08	3,69E-09	4,00E-11	
 SQP ¹	dimensionless	9,02E+01	2,90E+00	1,98E+00	3,20E+00	6,01E-02	

Indicator	Unit	B6	C1	C2	C3	C4	D
 PM	Disease incidence	6,11E-06	0,00E+00	4,45E-09	3,31E-09	2,27E-09	-1,48E-07
 IRP ²	kgBq U235 -eq	1,54E+02	0,00E+00	3,43E-03	4,13E-03	1,07E-03	-4,29E-02
 ETP-fw ¹	CTUe	8,45E+03	0,00E+00	5,75E-01	3,32E+00	1,29E+02	-4,13E+02
 HTP-c ¹	CTUh	1,97E-07	0,00E+00	0,00E+00	9,68E-10	8,40E-11	-3,36E-09
 HTP-nc ¹	CTUh	5,19E-06	0,00E+00	5,56E-10	5,39E-08	7,26E-10	-1,22E-07
 SQP ¹	dimensionless	5,09E+03	0,00E+00	9,02E-01	2,34E-01	8,40E-01	-1,17E+01

PM Particulate Matter emissions; IRP Ionizing radiation – human health; ETP-fw Eco toxicity – freshwater; HTP-c Human toxicity – cancer effects; HTP-nc Human toxicity – non cancer effects; SQP Soil Quality (dimensionless)

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use								
Indicator		Unit	A1	A2	A3	A4	A5	
	PERE	MJ	2,88E+01	6,10E-02	4,28E+01	6,54E-02	9,16E-04	
	PERM	MJ	1,15E+00	0,00E+00	0,00E+00	0,00E+00	-1,15E+00	
	PERT	MJ	3,00E+01	6,10E-02	4,28E+01	6,54E-02	-1,15E+00	
	PENRE	MJ	2,97E+02	4,55E+00	4,10E+00	4,64E+00	3,86E-02	
	PENRM	MJ	2,34E+01	0,00E+00	0,00E+00	0,00E+00	-3,92E+00	
	PENRT	MJ	3,13E+02	4,55E+00	4,10E+00	4,64E+00	-3,89E+00	
	SM	kg	3,91E-01	0,00E+00	4,95E-02	0,00E+00	1,58E-05	
	RSF	MJ	5,18E-01	2,15E-03	3,44E-02	2,34E-03	2,48E-05	
	NRSF	MJ	-1,52E+00	7,76E-03	8,91E-02	8,36E-03	7,05E-05	
	FW	m ³	2,50E-01	4,56E-04	3,23E-01	4,88E-04	2,00E-05	

Indicator		Unit	B6	C1	C2	C3	C4	D
	PERE	MJ	6,64E+03	0,00E+00	9,89E-03	1,29E-01	7,90E-02	-4,28E+00
	PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PERT	MJ	6,64E+03	0,00E+00	9,89E-03	1,29E-01	7,90E-02	-4,28E+00
	PENRE	MJ	6,86E+03	0,00E+00	7,86E-01	8,72E-01	3,23E-01	-1,38E+01
	PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	-2,07E+01	0,00E+00	0,00E+00
	PENRT	MJ	6,86E+03	0,00E+00	7,86E-01	-1,98E+01	3,23E-01	-1,39E+01
	SM	kg	0,00E+00	0,00E+00	0,00E+00	1,14E-05	2,79E-03	2,05E-03
	RSF	MJ	6,71E+01	0,00E+00	3,46E-04	2,29E-03	4,15E-04	9,23E-03
	NRSF	MJ	0,00E+00	0,00E+00	1,16E-03	-1,25E-04	1,51E-02	1,00E-01
	FW	m ³	3,02E+01	0,00E+00	8,95E-05	1,32E-03	2,79E-04	-1,24E-02

PERE Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM Use of renewable primary energy resources used as raw materials; PERT Total use of renewable primary energy resources; PENRE Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM Use of non renewable primary energy resources used as raw materials; PENRT Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; FW Use of net fresh water

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

End of life - Waste							
Indicator		Unit	A1	A2	A3	A4	A5
	HWD	kg	1,16E-01	2,28E-04	2,70E-02	2,36E-04	3,73E-05
	NHWD	kg	3,42E+00	1,98E-01	2,95E-01	2,22E-01	6,91E-02
	RWD	kg	8,42E-04	3,11E-05	3,26E-05	3,16E-05	1,70E-07

Indicator		Unit	B6	C1	C2	C3	C4	D
	HWD	kg	6,33E-01	0,00E+00	4,30E-05	4,31E-05	8,79E-02	-4,54E-03
	NHWD	kg	4,19E+01	0,00E+00	6,84E-02	5,83E-02	4,71E-01	-2,66E-01
	RWD	kg	7,07E-02	0,00E+00	5,37E-06	1,47E-06	8,71E-07	-3,70E-05

HWD Hazardous waste disposed; NHWD Non-hazardous waste disposed; RWD Radioactive waste disposed;

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

End of life - Output flow							
Indicator		Unit	A1	A2	A3	A4	A5
	CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	MFR	kg	0,00E+00	0,00E+00	9,29E-01	0,00E+00	7,77E-02
	MER	kg	0,00E+00	0,00E+00	5,76E-06	0,00E+00	2,20E-06
	EEE	MJ	0,00E+00	0,00E+00	1,11E-01	0,00E+00	2,08E-03
	EET	MJ	0,00E+00	0,00E+00	1,67E+00	0,00E+00	3,14E-02

Indicator		Unit	B6	C1	C2	C3	C4	D
	CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	MFR	kg	0,00E+00	0,00E+00	0,00E+00	8,26E-01	2,68E-05	3,78E-04
	MER	kg	0,00E+00	0,00E+00	0,00E+00	2,66E-01	2,68E-05	-8,02E-06
	EEE	MJ	0,00E+00	0,00E+00	0,00E+00	3,91E-01	2,69E-04	-2,07E-05
	EET	MJ	0,00E+00	0,00E+00	0,00E+00	5,92E+00	4,07E-03	-3,13E-04

CRU Components for re-use; MFR Materials for recycling; MER Materials for energy recovery; EEE Exported electrical energy; EET Exported Energy Thermal

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

Biogenic Carbon Content		
Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in accompanying packaging	kg C	1,42E-02

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Electricity, Norway (kWh)	ecoinvent 3.6	24,33	g CO ₂ -eq/kWh

Dangerous substances

The product contains no substances on the REACH Candidate list or the Norwegian priority list at or above 100 ppm, 0,01 % by weight.

Indoor environment

Not relevant.

Additional Environmental Information

Environmental impact indicators EN 15804+A1 and NPCR Part A v2.0						
Indicator	Unit	A1	A2	A3	A4	A5
GWP	kg CO ₂ -eq	2,21E+01	3,04E-01	3,58E-01	3,04E-01	5,87E-02
ODP	kg CFC11 -eq	1,67E-06	5,53E-08	2,78E-08	5,53E-08	4,56E-10
POCP	kg C ₂ H ₄ -eq	1,16E-02	5,84E-05	9,76E-05	4,06E-05	1,04E-06
AP	kg SO ₂ -eq	1,30E-01	1,40E-03	1,64E-03	6,04E-04	5,32E-06
EP	kg PO ₄ ³⁻ -eq	1,75E-02	1,50E-04	1,78E-04	6,44E-05	3,29E-06
ADPM	kg Sb -eq	6,90E-03	7,65E-06	1,90E-05	8,33E-06	5,29E-08
ADPE	MJ	2,51E+02	4,46E+00	2,36E+00	4,54E+00	3,75E-02
GWPIOBC	kg CO ₂ -eq	2,42E+01	3,07E-01	2,75E-01	3,08E-01	0,00E+00

Indicator	Unit	B6	C1	C2	C3	C4	D
GWP	kg CO ₂ -eq	3,63E+02	0,00E+00	5,00E-02	7,11E-01	4,49E-02	-2,89E-01
ODP	kg CFC11 -eq	4,12E-05	0,00E+00	9,45E-09	9,83E-09	2,36E-09	-1,24E-08
POCP	kg C ₂ H ₄ -eq	4,27E-02	0,00E+00	6,52E-06	1,50E-05	1,65E-05	-2,37E-04
AP	kg SO ₂ -eq	8,96E-01	0,00E+00	1,01E-04	3,34E-04	8,00E-05	-2,00E-03
EP	kg PO ₄ ³⁻ -eq	1,34E-01	0,00E+00	1,10E-05	6,14E-05	2,53E-05	-2,41E-04
ADPM	kg Sb -eq	3,88E-03	0,00E+00	8,63E-07	6,67E-07	1,46E-07	-1,01E-05
ADPE	MJ	6,89E+03	0,00E+00	7,71E-01	7,67E-01	3,07E-01	-2,88E+00
GWPIOBC	kg CO ₂ -eq	3,63E+02	0,00E+00	5,06E-02	7,12E-01	6,23E-03	-1,28E+00

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources; GWP-IOBC/GHG Global warming potential calculated according to the principle of instantaneous oxidation (except emissions and uptake of biogenic carbon)

Bibliography

ISO 14025:2010. Environmental labels and declarations - Type III environmental declarations - Principles and procedures. International Organization for Standardization.

ISO 14044:2006. Environmental management - Life cycle assessment - Requirements and guidelines. International Organization for Standardization.

EN 15804:2012+A2:2019. Environmental product declaration - Core rules for the product category of construction products. European Committee for Standardization.

ISO 21930:2017. Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products. International Organization for Standardization.

EN 50693:2019. Product category rules for life cycle assessments of electronic and electrical products and systems. European Committee for Standardization.

Ecoinvent v3, 2019. Allocation, cut-off by classification. Swiss Centre of Life Cycle Inventories.

Iversen et al., (2021). eEPD v2021.09, background information for EPD generator tool system verification, LCA.no. Report number: 07.21. System verification report.

Philis et al., (2022). EPD generator for IBU PCR part B for luminaires, lamps, and components for luminaires, background information for EPD generator application and LCA data, LCA.no. Report number: 04.22. PCR verification report.

EPD Norway (2022). NPCR Part A: Construction products and services. The Norwegian EPD foundation. Version 2.0 published 24.03.2021.

IBU (2017). PCR part B for luminaires, lampes and components for luminaires. Institut Bauen und Umwelt e.V. Version 1.7, published 30.11.2017.

Life cycle inventory (LCI) report for i60-600 LED 2900 HF OP, Glamox, May 2023.

 epd-norway <small>Global Program Operator</small>	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 23 08 80 00 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration: Glamox AS Birger Hatlebakks veg 15, 6415 Molde	Phone: +47 97551574 e-mail: birger.holo@glamox.com web: https://www.glamox.com
	Author of the Life Cycle Assessment LCA.no AS Dokka 6B, 1671	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	Developer of EPD generator LCA.no AS Dokka 6B, 1671 Kråkerøy	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal