



Krympeformgods med 2-veis forgrening


Helashrink 200 Serie, lavspenning

Egenskaper og fordeler

- Tidsbesparende krympeformgods til kabelforgrening
- Med lim for tetting og mekanisk avlastning



a: Før krymping

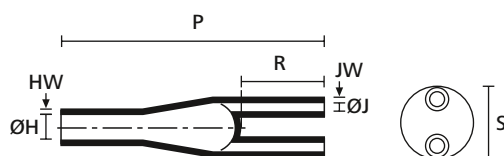

b: Etter krymping



223-2 krympet / ukrympet.

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	S nom.	El.nr.	Art.nr.
216-3-B8	21,0	9,4	9,0	2,8	76,5	20,0	1,6	1,6	-	11 501 00	402-16047
223-2-B8W2	33,0	9,4	17,5	4,1	94,0	30,0	1,5	1,2	20,0	11 501 01	402-23045
218-2-B8	49,0	22,9	20,0	7,6	119,0	34,0	3,2	3,2	-	11 501 02	402-18048

Alle dimensjoner i mm. Med forbehold om tekniske endringer.

Krympeformgods med 4-veis forgrening


HelaShrink Serie 400, lavspenning

Egenskaper og fordeler

- Tidsbesparende krympeformgods til kabelforgrening
- Produsert i tverrbundet Polyolefin
- Med lim for tetting og mekanisk avlastning



a: Før krymping

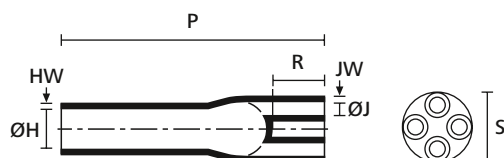

b: Etter krymping



Serie 400 krympet / ukrympet.

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	S nom.	El.nr.	Art.nr.
442-1-B8W2	28,0	9,0	9,0	1,8	78,0	17,0	2,7	2,0	20,0	11 501 07	404-42017
408-2-B8W2	35,0	12,0	15,0	3,0	95,0	24,0	2,5	2,0	22,0	11 501 08	404-08043
409-2-B8W2	47,4	22,9	21,5	6,4	165,0	38,1	4,1	3,3	38,1	11 501 09	404-09048
418-4-B8HPW2	60,0	22,9	30,0	6,4	202,0	38,1	4,1	3,3	38,1	11 501 10	404-18039
444-2-B8W2	95,0	35,6	35,6	12,5	240,0	55,0	4,0	3,5	50,8	11 501 11	404-44015

Alle dimensjoner i mm. Med forbehold om tekniske endringer.