




Availability

PU (SPU): 500 (50) Piece

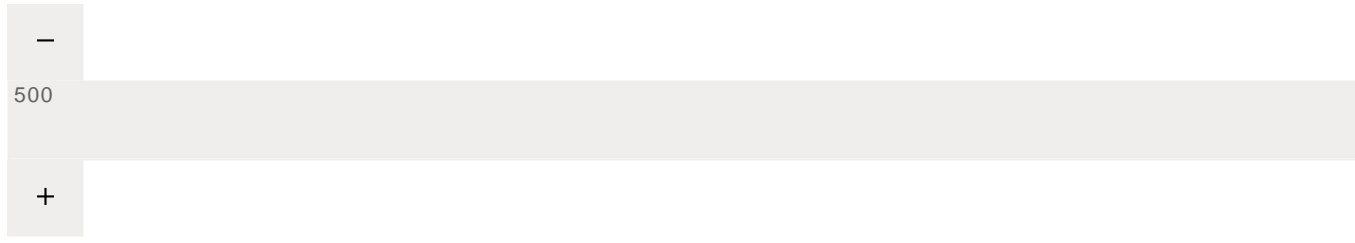

Add to project

Data sheet as PDF

Compare

Bookmark

Find distributors

Overview

Data

Downloads

Related products

Customers also purchased

Description

- Compact, 4-conductor EIB connector with PUSH WIRE®
- Simple push-in termination for solid conductors
- 4-conductor entry allows devices to be replaced without disrupting the EIB bus connection



Product details

Details ^

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated voltage (III/2)	100 V
Rated impulse voltage (III / 2)	4 kV
Rated voltage (II / 2)	630 V

Connection data

Connection technology	PUSH WIRE®
Conductor diameter information	When using different conductor diameters
Conductor diameter	0.6 - 0.8 mm
Length	5 ... 6 mm / 0.2 ... 0.24 Inch

Item no. 243-212



Geometrical Data

Width	10 mm / 0.394 inch
Height	11.5 mm / 0.453 inch
Depth	10 mm / 0.394 inch

Plug connection

Contact type (pluggable connector)	Female connector/socket
Connector connection type	for conductors

Material Data

Color	light gray/yellow
Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Clamping spring material	Chrome nickel spring steel (CrNi)

Environmental Requirements

Limit temperature range	-60 ... 105 °C
-------------------------	----------------

Commercial data

Country of Origin	DE
GTIN	4044918441407



Downloads

CAD files ^



3D data

Item no. 243-212



3D Download 243-212

URL

Chinese (China)

- › **Download**
- › **Bookmark**



Compatible products

Marking accessories ^

^ Show fewer v Show more

› United States (EN)

› We are happy to help

☎ **1-800-DIN-RAIL (346-7245)**



© 2018 WAGO Corporation

Contact

Careers

Imprint

Item no. 243-212

Terms and Conditions



