


PIN BUS BAR SHOCKHAZARD SAFETY, 16QMM 3 PHASE, L= 214MM CAN BE CUT, WITH END CAPS



| Model | |
|---------------------------------|------------------------------|
| Product brand name | SENTRON |
| Product designation | Pin busbar |
| Design of the product | 16mm ² 3PH L214mm |
| Busbar design | laminated |
| General technical data | |
| Surface processing / tin-plated | No |
| Main circuit | |
| Operating current / rated value | 80 A |
| Product details | |
| Product feature / flexible | Yes |
| Mechanical Design | |
| Width | 18 mm |
| Length | 214 mm |
| Thickness / of busbar | 18.3 mm |
| Net weight | 119.46 g |
| Material / of the busbar | SF-Cu F 24 |

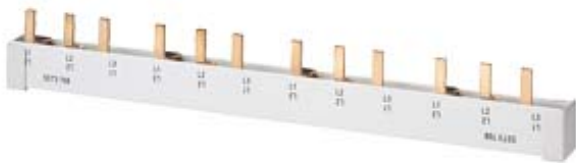

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3708>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3708>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3708

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

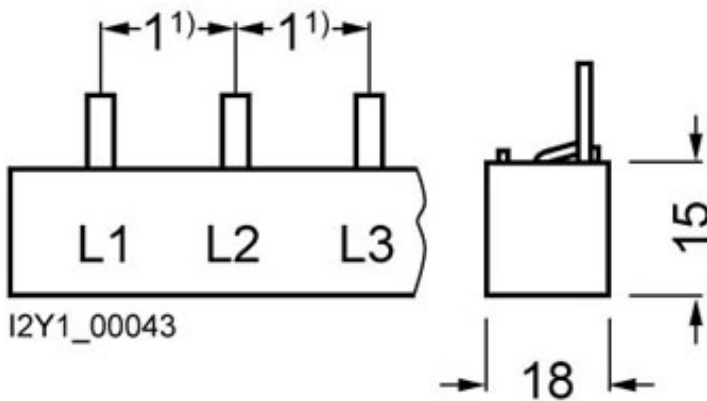

¹⁾ Pin spacings in MW (Modular widths, 1 MW = 18 mm).