


## Parallel connector Rd 8–10 mm, M8 x 25

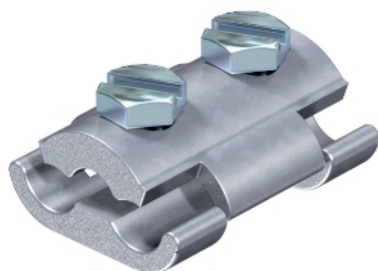

- With 2 hex-head screws M8 x 25, hot-dip galvanised steel

Type	Fit mm	Withstand lightning current kA
------	-----------	---

259 8-10	Rd 8-10	N/50
----------	---------	------

Pack. pcs	Weight kg/100 pcs.
--------------	-----------------------

25	13,230
----	--------

Item No.
----------

5315506
---------

**TG** Cast iron

**FT** Hot-dip galvanised

### Dimensions

