

Certifications

Approved by ERDF

Section

MV Multifunction

Application

Field

Laboratory

**PRODUCT BENEFITS**

Tuning of the pitch of the tool
 Embedded wear pads to protect the tool from the contact with the outer sheath

TOOL CAPACITY

Diameter 16 - 58 mm
 0,630 - 2,283 inch

Outer sheath and insulation thickness capacity 7 mm / 0,275 mm

TOOL DIMENSIONS

Length 170 mm

Width 90 mm

Height 120 mm

Weight without box 1,4 Kg

Packaging None

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
 FRANCE

Phone: +33 2 43 71 11 80

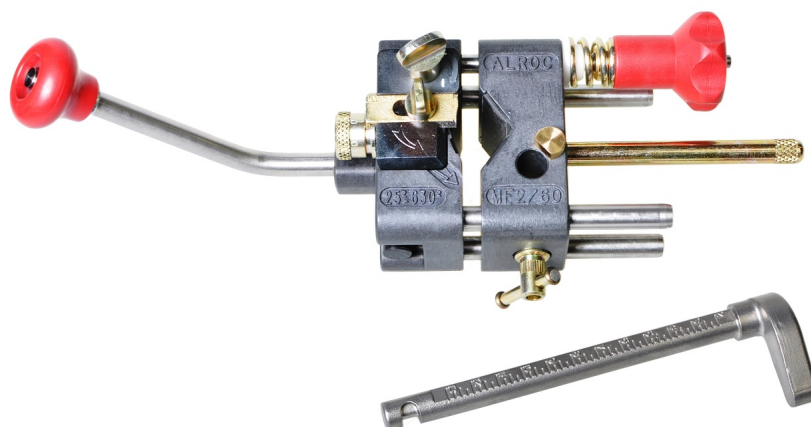
Fax number : +33 2 43 71 16 51

www.alroc.fr

Multifunction tool for outer sheath and insulation

TO DO WHAT

The MF2/60 enables the user to :
 Remove the outer sheath (PE-PVC-PR) with a straight and neat cut
 Set the length and remove thicker insulation with a straight and neat cut

**Spare part**

KIT-MF3/40 - Protective wear pads
 LMF2 - Spare blade for primary insulation
 BR - Thrust to set the length of insulation to be remove
 VBB1 - Screw for locking the thrust
 PCR - Quick set up right angled 45° handle
 196855 - Straight handle M10
 108098 - Clamping knob for blade

Associated tool

MF1+/25 - Multifunction tool for bonded semiconductor
 SRC - Scoring stylus for peelable semiconductor with chamfer

MF2/60



Part Number	Diameter	Tool capacity		Dimensions			Packaging
		Outer sheath and insulation thickness capacity	Length	Width	Height		
MF2/40	16 - 40 mm 0,630 - 1,575 in	7 mm / 0,275 mm	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	none	
MF2/40-S	16 - 40 mm 0,630 - 1,575 in	11 mm / 0,433 in	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	none	
MF2/60	16 - 58 mm 0,630 - 2,283 in	7 mm / 0,275 mm	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	none	
MF2/60-S	16 - 58 mm 0,630 - 2,283 in	11 mm / 0,433 in	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	none	