

Produktdatablad

for


10 045 72

12 fiber, 9/125 OS2 inne/ute







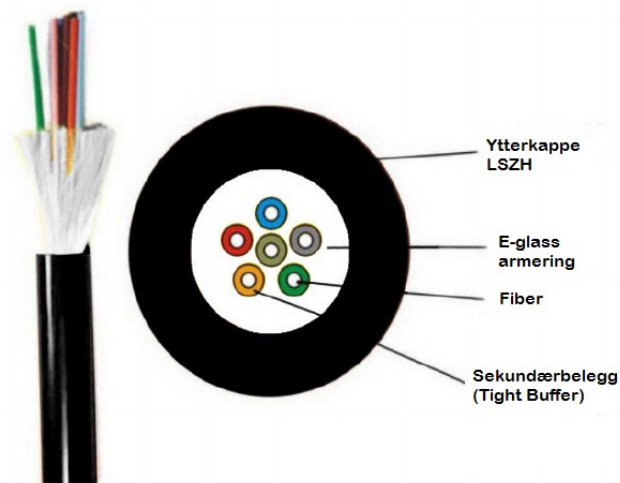


EAN nr: 7055530045604

Produktgruppe: FIBERKABEL

Bilde



Nærmere beskrivelse

-  Singel modus (SM) fiberkabel for bruk både inne og ute
-  Optisk kvalitet ihht fiberklasse OS2
-  Diam. kjerne: 9µm
-  Diam. kappe(cladding): 125µm
-  Diam. sekundærbelegg (fast kledning): 900 µm
-  Armeringsfiber: E-glass (egenskaper som kevlar, men med gnagerbeskyttelse)
-  Fiberglass G.652D. Produsent Corning.
-  Ytterkappe sort termoplast, LSZH
-  UV beskyttet

Tilsvarende varianter:

Ant. fiber	El.nr	Ytre diam	Min.bøyg rad
4	10 045 70	4,0mm	40mm
8	10 045 71	5,0mm	50mm
12	10 045 72	6,0mm	60mm
24	10 045 73	8,3mm	83mm

Environmental and mechanical tests according to EN 187000 and IEC 60794.
 Fire tests according to: UNE-EN 50266 (IEC 60332-3) / UNE-EN 50267-2-1/-2 (IEC 60754-2-1/-2) / UNE-EN 61034-2 (IEC 61034-2).

Fibre standard colour coding: red – green – grey – yellow – blue – natural – white – brown – violet – orange – pink – black.

LSZH – Halogen free, low smoke and flame retardant thermoplastic compound.