





Buntebånd i PA6.6 standard


• Serie T, sort



T18S - T150XXL

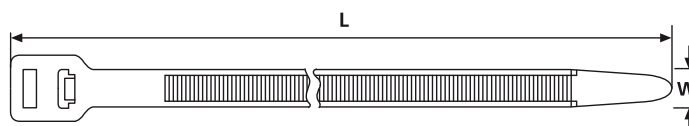

Serie T250

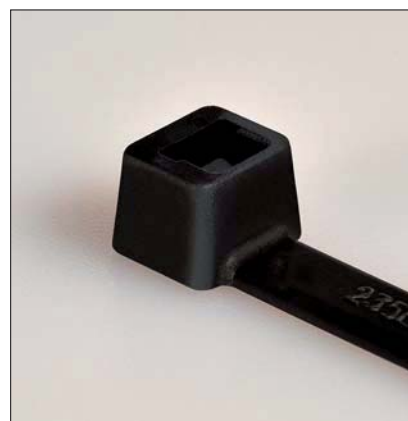

Materialdata	
Materiale	Polyamid 6.6 (PA66)
Driftstemperatur	-40°C til +85°C varig, (+105°C i 500 t)
Brennbarhetsklasse	UL94 V2



Typebetegnelse og tekniske data

Art.nr.	El.nr.	Type	Lengde (L)	Bredde (W)	Bunte Ø max.	Min. strekkfasthet (N)	Materiale	Farge	Mont. verktøy
Polyamid 6.6 (PA66)									
111-01910	–	T18R	100	2,5	22,0	80	PA66	Sort (BK)	1–3, 5
111-02370	–	T18I	145	2,5	35,0	80	PA66	Sort (BK)	1–3, 5
111-02110	–	T18L	205	2,5	55,0	80	PA66	Sort (BK)	1–3, 5
111-02500	13 447 82	T25L	240	2,8	65,0	110	PA66	Sort (BK)	1–3, 5
111-03210	–	T30R	150	3,5	35,0	135	PA66	Sort (BK)	1–3, 5
111-03410	13 450 38	T30L	198	3,5	50,0	135	PA66	Sort (BK)	1–3, 5
111-03500	13 447 84	T30LL	290,0	3,5	80,0	135	PA66	Sort (BK)	1–3, 5
111-05810	–	T50S	150,0	4,6	35,0	225	PA66	Sort (BK)	1–10
111-05000	–	T50R	200	4,6	50,0	225	PA66	Sort (BK)	1–10
111-06200	–	T50M	245,0	4,6	65,0	225	PA66	Sort (BK)	1–10
111-05210	13 447 87	T50I	300	4,6	85,0	225	PA66	Sort (BK)	1–10
111-05400	–	T50L	390,0	4,6	110	225	PA66	Sort (BK)	1–10
111-06002	–	T50LL	445	4,6	130	225	PA66	Sort (BK)	1–10
111-08010	–	T80R	210	4,7	55,0	355	PA66	Sort (BK)	1–10
111-08210	–	T80I	300	4,7	85,0	355	PA66	Sort (BK)	1–10
111-05410	–	T80L	390	4,7	110	355	PA66	Sort (BK)	1–10
111-12210	–	T120I	300	7,6	80,0	535	PA66	Sort (BK)	6–10
111-12010	–	T120R(E)	387	7,6	100	535	PA66	Sort (BK)	6–10
111-12610	13 450 42	T120M	460	7,6	130	535	PA66	Sort (BK)	6–10
111-12701	–	T120XM	600	7,6	175	535	PA66	Sort (BK)	6–10
111-12403	–	T120L	760	7,6	225	535	PA66	Sort (BK)	6–10
111-14810	–	T150R	365	7,6	100	670	PA66	Sort (BK)	6–10
111-00124	–	T150M	525	8,9	150	780	PA66	Sort (BK)	6–9
111-15405	–	T150L	820	8,9	245	780	PA66	Sort (BK)	6–9
111-15500	13 447 95	T150XL	1095	8,9	330	780	PA66	Sort (BK)	6–9
111-15300	–	T150XLL	1325	8,9	405	780	PA66	Sort (BK)	6–9
111-25102	–	T250X	370	12,5	100	1115	PA66	Sort (BK)	7–9
111-25001	–	T250M	565	12,5	150	1115	PA66	Sort (BK)	7–9
111-24601	–	T250L	880	12,5	254	1115	PA66	Sort (BK)	7–9
111-25200	–	T250XL	1030	12,5	305	1115	PA66	Sort (BK)	7–9

Alle dimensjoner i mm. Med forbehold om tekniske endringer.



For produktspesifikke godkjenninger, se tilleggsmasjiner bakerst i katalogen.