

LANmark Industri kontakt for DIN-skinne

LANmark Industry module DIN-rail mount with 1 Maritime Snap-In
Category 7A grey

Kontakt

Nexans Cabling Solutions
firmapost@nexans.com

Nexans ref.: [N20i.005](#)

El. nummer: 6916901

GTIN (EAN 13): 3427610084959

- For DIN-Rail mount (35mm)
- Data connection for industrial and maritime environments
- Easy termination, without punch down tool.
- Includes Mount + LANmark-7A Maritime shielded connector
- For technical enclosures, Wireless Access Points, Industrial cabinets

BESKRIVELSE

Application

The LANmark Industry DIN-Rail mount is designed to enable the installation of LANmark-7A Maritime Snap-in data connectors in industrial cabinets fitted with a 35mm DIN-Rail. Several DIN-Rail mounts can be joined together to form a row. The LANmark-7A connector exceeds the requirements of ISO/IEC 11801:2011. As such it supports all data applications defined for Cat 5, Cat 5e, Cat.6, Cat 6A and Cat 7A, such as:

- 10baseT
- Fast Ethernet
- Gigabit Ethernet
- 10 Gigabit Ethernet
- 155 ATM
- 622 ATM
- 1.2 ATM
- Industrial Ethernet


Performance

The LANmark-7A Snap-in connector has been designed to reach the highest performance in Category 7A and is part of the NCS DNV certified Maritime cabling products range.

Installation

The LANmark-7A Snap-in connector is designed to be terminated without punchdown tool. For fast and easy installation an optional comfort tool can be used.

- Fast termination
- Colour code : TSB568A & TSB568B
- Can be used with all types of cables : UTP, F/UTP, SF/UTP and S/FTP
- Accepts 24, 23 and 22 AWG cable, PUR, LSZH
- For all LANmark industrial and maritime cables

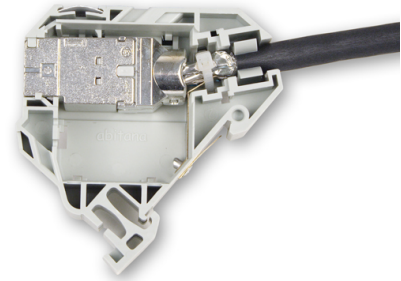

LANmark Industry

STANDARDER

Internasjonal ISO/IEC 11801;
ISO/IEC 24702



Motstandsevne støt
Svak



Elektromagnetisk interferens
motstand
Ja



Minimum driftstemperatur
0 °C



Maks. Kontinuerlig
ledertemperatur
70 °C



Vanntett
No



RoHS-godkjent
Ja

Alle tegninger, design, spesifikasjoner, planer og informasjon om vekt, størrelse og dimensjoner i Nexans' tekniske eller kommersielle dokumentasjon er omtrentlig og er ikke bindende fra Nexans' side.

Generert 16.09.20 www.nexans.no Side 1 / 2

Nexans

LANmark Industri kontakt for DIN-skinne

LANmark Industry module DIN-rail mount with 1 Maritime Snap-In Category 7A grey

Kontakt
Nexans Cabling Solutions
firmapost@nexans.com

EGENSKAPER

Konstruksjonsegenskaper

Konnektor type	Snap-In
Skjerm	Ja
Kabelinngang	From the top
Farge	Grå
Materiale	ABS

Dimensjonsegenskaper

Length cable end on inner side	80.0 mm
Antall kabler	1
Høyde	77,8 mm
Bredde	18 mm
Dybde	65 mm
Vegtykkelse (mm)	1,6 mm
Vekt pr. stk. (ca.)	0,03 kg
Skruedimensjoner	N/A
Number of screws	0

Elektriske egenskaper

Maksimal drifts frekvens	1000 MHz
Karakteristisk impedans	100 Ohm

Mekaniske egenskaper

Motstandsevne støt	Svak
--------------------	------

Bruksegenskaper

Funksjonsbeskrivelse komponent	Cabling and Connectivity solutions
Bruksområde	Industrielle installasjoner
Antall porter	1
Kategori	Cat. 7A
Elektromagnetisk interferens motstand	Ja
Forpakning	Plastic bag
Minimum driftstemperatur	0 °C
Maks. Kontinuerlig ledertemperatur	70 °C
Vann tett	No
RoHS-godkjent	Ja

INFORMASJON

The LANmark-7A DIN-Rail Mount is fitted with an earthing key. Please read the installation guidelines for proper grounding connection to the DIN-Rail. Set of covers (right-left) available (N20i.002)