

Roof Conductor Holder, adjustable to ridge and hip tiles


For fixing of air-termination conductors on the ridge, e.g. for tiled roofs

Technical data to part no.: 206 807

Infinitely adjustable with DEHNgrip conductor holder, loose conductor leading, laterally adjustable (top centre to the bottom)



Roof conductor holder - Material	StSt copper-plated
Clamping range	180-280 mm
Height of conductor holder (h1)	*20 mm
Conductor holder material	StSt copper-plated
Conductor holder supprt Rd	8 mm
Length of supporting claw	15 mm
Conductor holder - Model	DEHNgrip
Conductor leading	loose
Female thread M	6

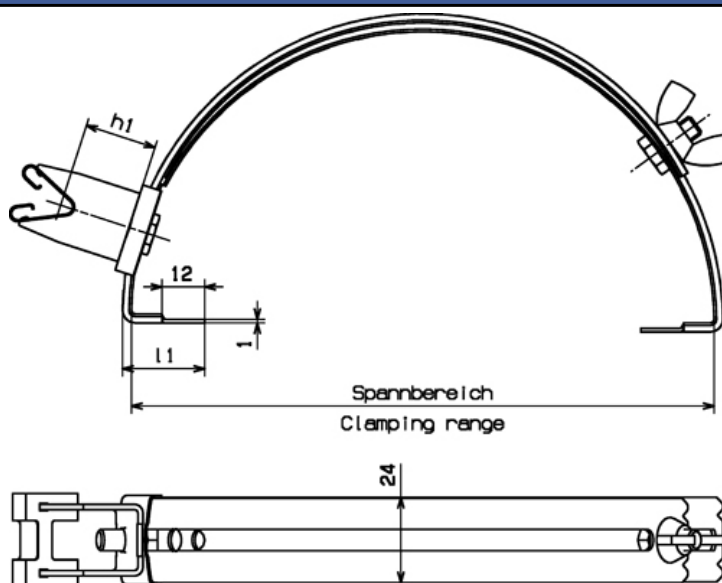

Ordering information

Type	Part No.	Packing unit
Roof Conductor Holder, adjustable to ridge and hip tiles	206 807	25 pcs

* short holding claws (l1 = 15 mm), standard length of holding claws 23 mm

We reserve the right to modify design, technology, dimensions, weights and materials according to technical progress. Illustrations are non-binding. Pictures may differ from the modules described.