






SUN OFL TR 1000 830 BK

Item number EL10810015





Device category		Floodlights
Product information		The floodlights are intended for use outdoors. If used inside (e. g. below the ceiling) the heat cannot be sufficiently discharged where necessary.
Installation type	Λ	Surface mounting
Installation position		Wall
Protection type		IP65
Dimensions		Length 150 mm x Width 133 mm x Height/Depth 75 mm
Diffusor	•	transparent
Luminous efficacy		92 lm/W
Luminous flux		900 lm
Rated output P		9.7 W

Colour temperature	3000 K
In-rush current	4.7 A/ 303 μs
Permissible ambient temperature	-25 °C+50 °C
Warranty	3-year

ACCESSORIES

MOUNTING



FL WALL ARM 700 BK

Item number EL10810534 Wall arm for floodlight, 700 mm, including adapter, black







FL GROUND SPIKE BK

Item number EL10810558
Wall arm for floodlight, including adapter, black







INSTALLATION VIDEO









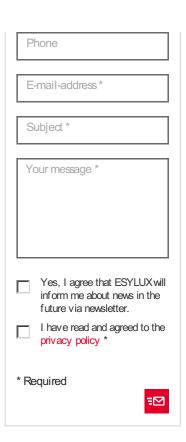

SIMILAR PRODUCTS



OTHER PRODUCTS





Solutions

Offices

Education

Health Care Innovations

Demand-driven Automation

Intelligent Lighting

Human Centric Lighting

Light control with DALI-2

Service

Downloads

Knowledge

Support

ESYLUX Services

Company

Vision and mission

Experience and quality

Corporate responsibility

Research and development

Cooperations and memberships

Awards and prizes

References Highlights

ESYLUX Light Control

DEFENSOR

COMPACT

ESY-Pen

ALVA

FLAT

ISABELLE

Imprint |
Privacy policy |
Privacy policy |
Privacy policy |
Privacy settings |
General terms and conditions |
Guarantee |
Disclaimer |
Contact
© 2021 ESYLUX GmbH