RECESSED LIGHTS STELLA



« »

STELLA PNL 600 DDP OP 3800 840 IP20 DALI

Item number EQ10600234



With their low profile design, LED recessed lights in the STELLA series are well-suited to flexible applications in offices, learning environments and healthcare facilities. As such, they fulfil all requirements of contemporary light installations in terms of their straightforward handling, light quality and energy efficiency.



Device category	Recessed light
Installation type	Insert
Installation position	Ceiling
Protection type	IP20
Dimensions	Length 595 mm x Height/Depth 11 mm
Diffusor	opal
Unified Glare Rating	≤ 19
Luminous efficacy	102 lm/W
Luminous flux	3800 lm
Rated output P	37 W

Colour temperature	4200 K
In-rush current	14.2 A/ 114 μs
Permissible ambient temperature	0 °C+50 °C
Warranty	5 years

ACCESSORIES

MOUNTING



STELLA MOUNTING FRAME 600 SM WH

Item number EQ10600173

Ceiling installation frame for STELLA series, 600 mm







MOUNTING FRAME 600 FM WH

Item number EQ10113086

Surface-mounted ceiling installation frame 600 for panel lights







MOUNTING FRAME 600/625 SM WH

Item number EQ10113468

Surface-mounted ceiling installation frame 600/625 for panel lights





PROTECTION




DROP PROTECTION

Item number EQ10121616
Steel cable for securing ESYLUX panel lights to the ceiling.





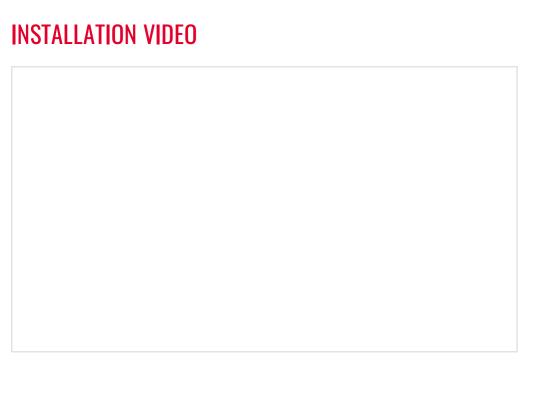





SIMILAR PRODUCTS



OTHER PRODUCTS





Solutions

Offices

Education

Health Care **Innovations** Demand-driven Automation Intelligent Lighting Human Centric Lighting Light control with DALI-2 Service Downloads Knowledge Support **ESYLUX Services** Company Vision and mission Experience and quality Corporate responsibility Research and development Cooperations and memberships Awards and prizes References Highlights **ESYLUX Light Control** DEFENSOR COMPACT ESY-Pen **ALVA** FLAT **ISABELLE Imprint** Privacy policy Privacy settings General terms and conditions |

☐ f ☐ in 📈

Guarantee Disclaimer Contact

© 2021 ESYLUX GmbH