

PRODUCT INFORMATION


EPIC® H-B 6 AD-LB

Housing design H-B. The industry standard.

The robust metal housing with a single lever and a seal is suitable for use in investment construction and the plastics industry.

Info

Metal lid with sturdy hinge Protection rating UL50E tested

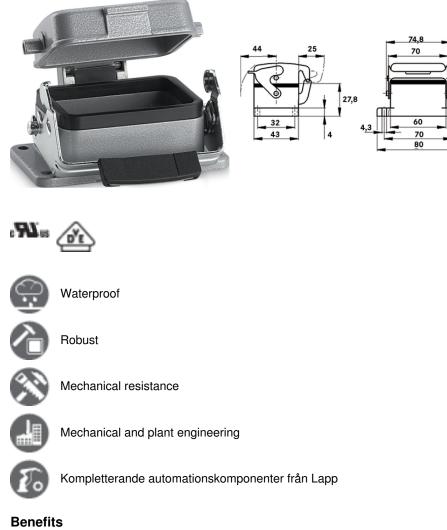

The smallest housing out of the H-B series. For inserts with high electrical properties

Application range

Plant engineering Control engineering Plastics industry

Product features

H-A case: Wall base

Last Update (13.12.2019) ©2019 Lapp Group - Technical changes reserved Product Management www.lappkabel.de You can find the current technical data in the corresponding data sheet. PN 0456 / 02_03.16



EPIC® H-B 6 AD-LB

Single lever Metal cover Included: flat gasket

Technical Data		
Classification ETIM 5:	ETIM 5.0 Class-ID: EC000437 ETIM 5.0 Class-Description: Housing for industrial connectors	
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000437 ETIM 6.0 Class-Description: Housing for industrial connectors	
Material:	Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR	
Protection rating:	IP 65 (latched) NEMA 250, UL50E: 12, 4 (latched)	
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770	
Temperature range:	-40°C to +100°C, short-term up to +125°C	

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.

Pro Pro Pro PN	Article number	Article description	Μ	
duc 045	H-B housing: panel-mount base (cover, single lever)			
bdat Lap t Ma 6 / 0	10004000	H-B 6 AD-LB	AG	
Last Update (13.12.2019) ©2019 Lapp Group - Technical changes reserved Product Management www.lappkabel.de You can find the current technical data in the corror PN 0456 / 02_03.16				
s reserved e in the corresponding data sheet.				