


Product Description

Reliable bending and antikink protection; High strain relief; robust; For cables with large outer diameters; High degree of protection

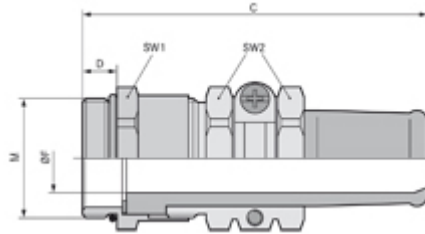

Application range

- Cables for electrical appliances and machinery, which are moved under normal use, must be protected against excessive bending, as required in accordance with VDE 0730.
- Hand-held equipment
- movable machinery
- Building sites
- Flexing machine parts

Benefits

- Reliable bending and antikink protection
- High strain relief
- robust
- For cables with large outer diameters
- High degree of protection

Design

- Metric connection thread acc. to EN 50262

Note

- Counter nut to be used SKINDICHT® SM-M
- EMC type please see SKINDICHT® SRE-M



Technical Data

Caution

Installation dimensions see Appendix T21

Material

Metal parts: Nickel plated brass O-ring: NBR

Antikink protection: CR/NBR

Degree of protection

IP 65

Range of temperature

-20°C up to +80°C

Article List

Part number	Part designation / size	Clamping range ØF mm	Max. fitting size for installation in mm	Function thread PG	SW1 / SW2 mm	Overall length C mm	Thread length D mm	Clear opening F mm	Pieces / PU
SKINDICHT® SR-M									
52106410	12 x 1,5	4 - 5	23	7	14 / 15	49	5	5	50
52106420	16 x 1,5	5,5 - 7	25	9	18 / 17	50	5	7	50
52106430	20 x 1,5	5,5 - 7	28	11	22 / 20	55	6	7	25
52106440	20 x 1,5	7,5 - 9	28	11	22 / 20	55	6	9	25
52106450	20 x 1,5	7,5 - 9	32	13.5	22 / 22	60	6	9	25
52106460	20 x 1,5	9 - 11	32	13.5	22 / 22	60	6	11	25
52106470	20 x 1,5	11 - 13	32	13.5	22 / 22	60	6	13	25
52106480	20 x 1,5	12 - 13	35	16	24 / 24	65	6	13	25
52106481	20 x 1,5	13 - 15	35	16	24 / 24	66	6	15	25
52106490	25 x 1,5	12,5 - 15	46	21	30 / 30	78,5	7	15	25
52106500	25 x 1,5	14 - 17	46	21	30 / 30	78,5	7	17	25

52106510	25 x 1,5	17 - 19	46	21	30 / 30	78,5	7	19	25
52106520	25 x 1,5	17 - 20	46	21	30 / 30	78,5	7	20	25
52106530	32 x 1,5	19 - 20	59	29	40 / 41	90,5	8	20	10
52106540	32 x 1,5	22 - 23	59	29	40 / 41	90,5	8	23	10
52106550	32 x 1,5	23 - 25	59	29	40 / 41	90,5	8	25	10
52106560	40 x 1,5	24 - 26	70	36	50 / 50	108	8	26	5
52106570	40 x 1,5	28 - 30	70	36	50 / 50	108	8	30	5
52106580	40 x 1,5	31 - 33	70	36	50 / 50	108	8	33	5
52106590	40 x 1,5	33 - 34,5	70	36	50 / 50	108	8	35	5
52106600	50 x 1,5	31 - 34,5	75	42	57 / 57	111	9	35	5
52106610	50 x 1,5	32 - 38	75	42	57 / 57	111	9	38	5
52106620	50 x 1,5	37 - 40	75	42	57 / 57	111	9	40	5
52106630	63 x 1,5	32 - 40	83	48	66 / 64	118	10	40	1
52106640	63 x 1,5	36 - 44	83	48	66 / 64	118	10	44	1