


Product Description

Maximum reliability; Permanent vibration protection; Optimal strain relief; Large, variable clamping ranges

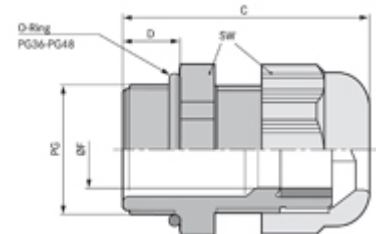

Application range

- Everywhere where cables must be safely inserted into housings.
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Mobile off shore units, equipment and ship yards

Benefits

- Maximum reliability
- Permanent vibration protection
- Optimal strain relief
- Large, variable clamping ranges

Design

- PG connection thread

Note

- For suitable accessories see SKINTOP® accessories PG
- counter nut to be used SKINTOP® GMP-GL



Technical Data

Caution

Installation dimensions and tightening torques see Appendix T21

Colour delivered

RAL 7001 silver-grey RAL 7035 light grey RAL 9005 black / UV resistant

Material

Body: Polyamide Seal: CR

Tests

GGVS: TÜ.EGG.020-95

Degree of protection

IP 68 - 5 bar

Range of temperature

-20°C up to +80°C

Article List

Part number	Part designation / size	Clamping range ØF mm	SW mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINTOP® ST silver grey						
53015000	ST 7	2,5 - 6,5	15	32	8	100
53015010	ST 9	3,5 - 8	19	36	8	100
53015020	ST 11	4 - 10	22	38	8	100
53015030	ST 13,5	6 - 12	24	41	9	100
53015040	ST 16	9 - 14	27	44	10	50
53015050	ST 21	13 - 18	33	49	11	50
53015060	ST 29	14 - 25	42	56	11	25
53015070	ST 36	24 - 32	53	66	13	10
53015080	ST 42	35 - 38	60	68	13	5
53015090	ST 48	39 - 44	65	69	14	5
SKINTOP® ST black						
53015200	ST 7	2,5 - 6,5	15	32	8	100
53015210	ST 9	3,5 - 8	19	36	8	100
53015220	ST 11	4 - 10	22	38	8	100
53015230	ST 13,5	6 - 12	24	41	9	100
53015240	ST 16	9 - 14	27	44	10	50
53015250	ST 21	13 - 18	33	49	11	50
53015260	ST 29	14 - 25	42	56	11	25
53015270	ST 36	24 - 32	53	66	13	10
53015280	ST 42	35 - 38	60	68	13	5
53015290	ST 48	39 - 44	65	69	14	5
SKINTOP® ST light grey						

53018000	ST 7	2,5 - 6,5	15	32	8	100
53018010	ST 9	3,5 - 8	19	36	8	100
53018020	ST 11	4 - 10	22	38	8	100
53018030	ST 13,5	6 - 12	24	41	9	100
53018040	ST 16	9 - 14	27	44	10	50
53018050	ST 21	13 - 18	33	49	11	50
53018060	ST 29	14 - 25	42	56	11	25
53018070	ST 36	24 - 32	53	66	13	10
53018080	ST 42	35 - 38	60	68	13	5
53018090	ST 48	39 - 44	65	69	14	5