


## Product Description

Reliable bending and antikink protection; Conservation; Functional reliability; To protect flexible cables

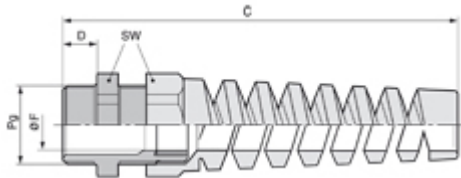

## Application range

- Cables for electrical appliances and machinery, which are moved under normal use, must be protected against excessive bending, as required in accordance with VDE 0730.
- Hand-held equipment
- Robotics industry
- Light and sound applications
- Flexing machine parts

## Benefits

- Reliable bending and antikink protection
- Conservation
- Functional reliability
- To protect flexible cables

## Design

- PG connection thread



**Note**

- For suitable accessories see SKINTOP® accessories PG
- counter nut to be used SKINTOP® GMP-GL
- Version with reducing insert to seal smaller cable cross-sections SKINTOP® BSR on request

**Technical Data**

**Caution**

Installation dimensions and tightening torques see Appendix T21

**Colour delivered**

RAL 7001 silver-grey RAL 9005 black / UV resistant

**Material**

Body: Polyamide Seal: CR

**Degree of protection**

IP 68 - 5 bar

**Range of temperature**

-20°C up to +80°C

**Article List**

Part number	Part designation / size	Clamping range ØF mm	SW mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINTOP® BS silver grey						
53015600	BS 7	2,5 - 6,5	15	62	8	100
53015610	BS 9	3,5 - 8	19	73,5	8	100
53015620	BS 11	4 - 10	22	86	8	100
53015630	BS 13,5	6 - 12	24	98	9	50
53015640	BS 16	9 - 14	27	111,5	10	25
53015650	BS 21	13 - 18	33	129	11	25
SKINTOP® BS black						
53015800	BS 7	2,5 - 6,5	15	62	8	100
53015810	BS 9	3,5 - 8	19	73,5	8	100
53015820	BS 11	4 - 10	22	86	8	100
53015830	BS 13,5	6 - 12	24	98	9	50
53015840	BS 16	9 - 14	27	111,5	10	25
53015850	BS 21	13 - 18	33	129	11	25

**Footnote:**

Photographs are not to scale and do not represent detailed images of the respective products.