



Expanded ambient temperatures

Silicone cables (-50°C to +180°C)



ÖLFLEX® HEAT 180 EWKF

Silicone cables with increased mechanical characteristics

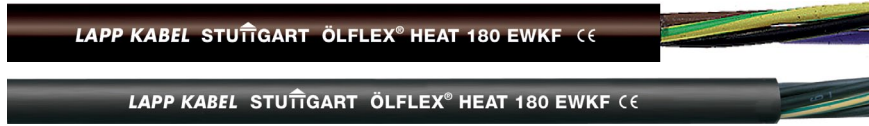

Info

- Proven notch-resistant EWKF quality

Benefits

- Longer durability in harsh applications than conventional silicone cables
- Notch and tear-resistant silicone compounds reduce damage due to mechanical stress
- Due to the use of special additives in EWKF silicone, armoured cable versions will not be required
- Flexibility simplifies installation where space is limited
- Possesses insulating properties after combustion due to remaining SiO₂ ash on the conductor

Application range

- Areas with high ambient temperatures and occasionally mechanical stress
- Typical fields of application
 - Steel, ceramic and iron works
 - Bakery equipment and industrial furnaces
 - Electric motor industry
 - Sauna/solarium construction
 - Thermal and heating elements
 - Lighting technology
 - Ventilator engineering
 - Air-conditioning technology
 - Galvanisation technology

Product features

- Halogen-free and flame-retardant (IEC 60332-1-2)
- Good hydrolysis and UV-resistance
- Resistant to a multitude of oils, alcohols, vegetable and animal fats and chemical substances
- EWKF:** Initial tear propagation and notch resistant

Product make-up

- Fine-wire, tinned-copper conductor
- Core insulation: based on EWKF silicone
- Cores twisted together
- Outer sheath: silicone-based EWKF, notch-resistant, black

Technical data

Classification
ETIM 5.0 Class-ID: EC001578
ETIM 5.0 Class-Description: Flexible cable

Core identification code
Colours according to VDE 0293-308, refer to Appendix T9
From 6 cores: black with white numbers

Specific insulation resistance
>200 GOhm x cm

Conductor stranding
Fine wire according to VDE 0295 Class 5 / IEC 60228 Class 5

Minimum bending radius
Occasional flexing: 15 x outer diameter
Fixed installation: 4 x outer diameter

Nominal voltage
U₀/U: 300/500 V

Test voltage
2000 V

Protective conductor
G = with GN-YE protective conductor
X = without protective conductor

Temperature range
-50 °C to +180 °C
(adequate ventilation required)

Article number	Number of cores and mm ² per conductor	Outer diameter (mm)	Copper index (kg/km)	Weight (kg/km)
ÖLFLEX® HEAT 180 EWKF				
0046500	2 X 0.75	6.4	15.0	49
0046501	3 G 0.75	6.9	22.0	60
00465023	4 G 0.75	7.6	29.0	76
00465033	5 G 0.75	8.5	36.0	96
0046506	2 X 1	6.8	20.0	56
0046507	3 G 1	7.1	29.0	68
00465083	4 G 1	7.9	39.0	88
00465093	5 G 1	8.8	48.0	110
0046110	7 G 1	9.5	67.2	137
0046511	2 X 1.5	8.0	29.0	77
0046512	3 G 1.5	8.4	43.0	94
00465133	4 G 1.5	9.5	58.0	117
00465143	5 G 1.5	10.4	72.0	143

Article number	Number of cores and mm ² per conductor	Outer diameter (mm)	Copper index (kg/km)	Weight (kg/km)
0046115	7 G 1.5	11.0	101.0	180
0046116	12 G 1.5	14.9	173.0	319
0046117	16 G 1.5	17.1	230.4	424
0046119	24 G 1.5	21.0	345.6	637
0046520	2 X 2.5	9.4	48.0	110
0046521	3 G 2.5	9.8	72.0	146
00465223	4 G 2.5	11.1	96.0	181
00465233	5 G 2.5	12.4	120.0	222
0046131	3 G 4	11.5	114.0	213
00461323	4 G 4	12.5	152.0	267
00461333	5 G 4	13.9	190.0	334
0046141	3 G 6	13.2	174.0	297
00461423	4 G 6	14.7	232.0	381
00461433	5 G 6	16.5	290.0	481

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request. Copper price basis: EUR 150/100kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges. Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths
Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum
Please specify the preferred type of packaging (e.g. 1 x 500 m drum or 5 x 100 m coils).
Photographs are not to scale and do not represent detailed images of the respective products.

Similar products

- ÖLFLEX® HEAT 180 H05SS-F EWKF refer to page 167
- ÖLFLEX® HEAT 180 EWKF C refer to page 171