



Radox 125 S2 Multicore cables


General Properties :

Excellent high temperature and low temperature, ozone and weathering resistance, halogen free, flame retardant, in case of fire no corrosive gases and low smoke generation, soldering iron resistant, flexible, easy to strip.

Application :

For permanent installation inside and outside to connect fixed and moving parts. Designed for connecting photovoltaic system components inside and outside of buildings and equipment with high mechanical requirements and extreme weather conditions.

General composition of cable :

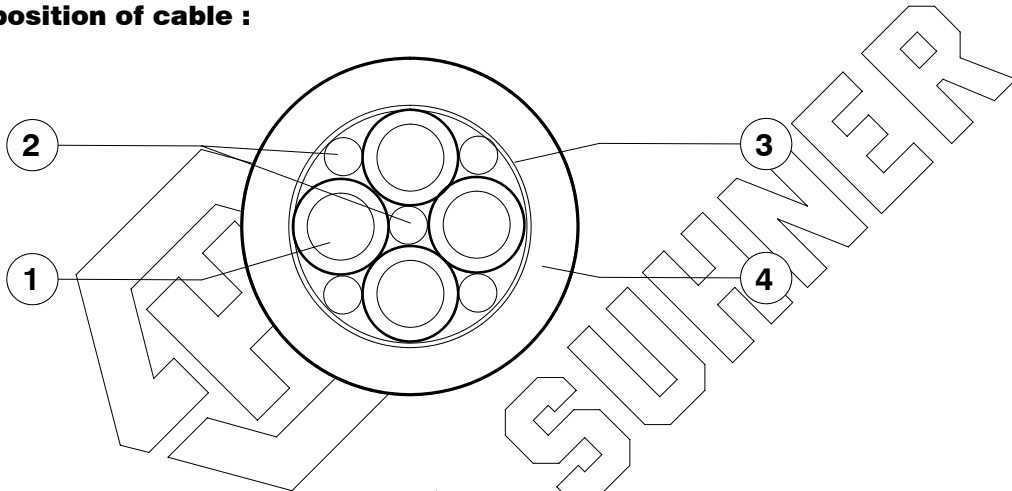

- | | |
|---------------------------------------|--|
| 1. Cores
(for details see table 1) | Conductor : stranded tin plated copper, acc. to IEC 60228 cl. 5
Insulation : Radox 125 :extruded irradiation crosslinked polyolefin
Colours : 2 to 5 cores acc. HD 308 S2
6 and more cores BK numbered (+1 x GNYE)
(colours acc. customer requirements on request) |
| 2. Filler (if necessary) | Radox 125 |
| 3. Wrapping | Woven glass tape |
| 4. Sheath | Radox 125 M : extruded irradiation crosslinked polyolefin,
Colour : black |

Cable marking: HUBER + SUHNER SWITZERLAND RADOX 125 125zzzzz-zzzzzz _____ Production lot number

Technical Data :

Temperature range	fixed	- 40 ... +125 .. °C
Minimum temperature	flexing	- 25 °C
Maximum conductor temperature at short circuit (max. 5s)		+ 280 °C
Min. bending radius	fixed	3 x cable dia.
	flexing	5 x cable dia.

Copyright 2008 Huber + Suhner AG. This document may not be copied nor be passed on to third parties without our written permission.
Uncontrolled copy when printed (will not be updated).

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER

Wire+Cable Division

CH-8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



Radox 125 S2

Multicore cables

The cables pass the following fire tests:

Vertical flame spread of a single cable EN 50265-2-1, IEC 60332-1

Vertical flame spread of bunched cables EN 50266-2-4, IEC 60332-3-24 Category C

Amount of halogen acid gas EN 50267-2-1, IEC 60754-1 0 mg/g

Corrosivity of combustion gases EN 50267-2-2, IEC 60754-2

Smoke density EN 50268-2, IEC 61034-2

Size n x mm ²	Conductor constr. n x mmØ	max.Ø mm	Core Ø mm	R ₂₀ max Ω / km	Cable Ø mm	Weight nom kg/100m	Nominal- voltage V	Test- voltage V	H+S Part-No.
2 x 0.25	19 x 0.13	0.61	1.45 ± 0.05	88.5	4.7 ± 0.3	2.85	450/750	2500	12 583 614
5 x 0.25	19 x 0.13	0.61	1.45 ± 0.05	88.5	5.9 ± 0.3	4.8	450/750	2500	12 583 656
6 x 0.25	19 x 0.13	0.61	1.45 ± 0.05	88.5	6.5 ± 0.3	5.7	450/750	2500	12 583 657
10 x 0.25	19 x 0.13	0.61	1.45 ± 0.05	88.5	8.3 ± 0.3	8.6	450/750	2500	12 583 658
15 x 0.25	19 x 0.13	0.61	1.45 ± 0.05	88.5	9.5 ± 0.3	11.8	450/750	2500	12 583 659
25 x 0.25	19 x 0.13	0.61	1.45 ± 0.05	88.5	11.7 ± 0.3	17.4	450/750	2500	12 583 660
2 x 0.5	19 x 0.18	0.9	1.7 ± 0.1	40.1	6.2 ± 0.3	5.1	450/750	2500	12 430 129
8 G 0.5	19 x 0.18	0.9	1.7 ± 0.1	40.1	8.8 ± 0.3	11.3	450/750	2500	12 584 718
16 x 0.5	19 x 0.18	0.9	1.7 ± 0.1	40.1	11.0 ± 0.4	18.1	450/750	2500	12 583 168
25 G 0.5	19 x 0.18	0.9	1.7 ± 0.1	40.1	14.0 ± 0.4	28.7	450/750	2500	12 584 048
2 x 0.75	24 x 0.20	1.15	2.2 ± 0.1	26.7	6.6 ± 0.3	6.3	600/1000	3500	12 430 125
3 G 0.75	24 x 0.20	1.15	2.2 ± 0.1	26.7	6.95 ± 0.3	7.1	600/1000	3500	12 508 101
3 X 0.75	24 x 0.20	1.15	2.2 ± 0.1	26.7	6.95 ± 0.3	7.1	600/1000	3500	12 584 695
4 G 0.75	24 x 0.20	1.15	2.2 ± 0.1	26.7	7.7 ± 0.3	8.8	600/1000	3500	12 582 626
5 G 0.75	24 x 0.20	1.15	2.2 ± 0.1	26.7	8.7 ± 0.3	10.9	600/1000	3500	12 583 767
7 G 0.75	24 x 0.20	1.15	2.2 ± 0.1	26.7	10.2 ± 0.3	15.1	600/1000	3500	12 532 843
10 G 0.75	24 x 0.20	1.15	2.2 ± 0.1	26.7	11.8 ± 0.4	19.3	600/1000	3500	12 583 768
16 x 0.75	24 x 0.20	1.15	2.2 ± 0.1	26.7	13.7 ± 0.4	27.6	600/1000	3500	12 583 771
2 x 1	32 x 0.20	1.3	2.6 ± 0.1	20.0	7.5 ± 0.3	7.4	600/1000	3500	12 430 115
3 G 1	32 x 0.20	1.3	2.6 ± 0.1	20.0	7.9 ± 0.3	9.1	600/1000	3500	12 420 417
32 X 1	32 x 0.20	1.3	2.6 ± 0.1	20.0	21.6 ± 0.3	68	600/1000	3500	12 583 305



Radox 125 S2

Multicore cables

Size n x mm ²	Conductor		Core Ø mm	R ₂₀ max Ω / km	Cable Ø mm	Weight nom kg/100m	Nominal- voltage V	Test- voltage V	H+S Part-No.
	constr. n x mmØ	max.Ø mm							
2 x 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	7.8 ± 0.3	8.6	600/1000	3500	12 430 113
3 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	8.3 ± 0.3	11.0	600/1000	3500	12 430 116
3 X 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	8.3 ± 0.3	11.0	600/1000	3500	12 584 703
4 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	9.2 ± 0.3	13.6	600/1000	3500	12 582 631
4 X 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	9.2 ± 0.3	13.6	600/1000	3500	12 584 705
5 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	10.4 ± 0.4	16.7	600/1000	3500	12 582 632
7 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	12.3 ± 0.4	23.6	600/1000	3500	12 420 406
8 x 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	13.6 ± 0.4	28.1	600/1000	3500	12 584 490
8 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	13.6 ± 0.4	28.1	600/1000	3500	12 584 678
12 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	14.5 ± 0.4	33.6	600/1000	3500	12 583 769
16 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	16.4 ± 0.5	44.1	600/1000	3500	12 583 770
18 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	17.5 ± 0.5	50	600/1000	3500	12 584 378
21 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	19.8 ± 0.5	60	600/1000	3500	12 583 772
24 G 1.5	30 x 0.25	1.55	2.73 ± 0.1	13.7	20.4 ± 0.5	64	600/1000	3500	12 584 677
2 x 2.5	48 x 0.25	2.05	3.5 ± 0.1	8.21	9.1 ± 0.3	13.0	600/1000	3500	12 430 130
3 G 2.5	48 x 0.25	2.05	3.5 ± 0.1	8.21	10.1 ± 0.4	16.6	600/1000	3500	12 420 355
3 X 2.5	48 x 0.25	2.05	3.5 ± 0.1	8.21	10.1 ± 0.4	16.6	600/1000	3500	12 584 704
4 G 2.5	48 x 0.25	2.05	3.5 ± 0.1	8.21	11.4 ± 0.4	21.1	600/1000	3500	12 583 775
5 G 2.5	48 x 0.25	2.05	3.5 ± 0.1	8.21	12.4 ± 0.4	24.9	600/1000	3500	12 582 635
3 x 4	56 x 0.30	2.6	4.15 ± 0.15	5.09	12.0 ± 0.4	24.3	600/1000	3500	12 585 166
4 G 4	56 x 0.30	2.65	4.15 ± 0.15	5.09	13.0 ± 0.4	29.7	600/1000	3500	12 582 668
12 x 4	56 x 0.30	2.65	4.15 ± 0.15	5.09	21.4 ± 0.5		600/1000	3500	12 582 948
2 x 6	81 x 0.30	3.4	4.95 ± 0.15	3.39	12.8 ± 0.4	26	600/1000	3500	12 583 577
3 x 6	81 x 0.30	3.4	4.95 ± 0.15	3.39	13.8 ± 0.4	32.6	600/1000	3500	12 585 165
5 G 6	81 x 0.30	3.4	4.95 ± 0.15	3.39	17.6 ± 0.5	52	600/1000	3500	12 584 613
4 G 10	78 x 0.40	4.4	6.15 ± 0.15	1.95	18.9 ± 0.5	68	600/1000	3500	12 584 289
3 X 25	182 x 0.4	6.7	8.9 ± 0.2	0.795	23.7 ± 0.6	104	600/1000	3500	12 585 400
4 X 25	182 x 0.4	6.7	8.9 ± 0.2	0.795	26.5 ± 0.6	142	600/1000	3500	12 585 404
4 G 25	182 x 0.4	6.7	8.9 ± 0.2	0.795	26.5 ± 0.6	142	600/1000	3500	12 584 931



Radox 125 S2

Multicore cables

Size n x mm ²	Conductor		Core Ø mm	R ₂₀ max Ω / km	Cable Ø mm	Weight nom kg/100m	Nominal- voltage V	Test- voltage V	H+S Part-No.
	constr. n x mmØ	max.Ø mm							
3 X 35	266 x 0.4	7.9	10.3 ± 0.2	0.565	27.2 ± 0.6		600/1000	3500	12 585 401
4 X 35	266 x 0.4	7.9	10.3 ± 0.2	0.565	30.8 ± 0.6		600/1000	3500	12 585 405
3 X 50	378 x 0.4	9.4	12.1 ± 0.25	0.393	31.3 ± 0.6	211	600/1000	3500	12 585 402
4 X 50	378 x 0.4	9.4	12.1 ± 0.25	0.393	31.3 ± 0.6		600/1000	3500	12 585 406
3 X 70	348 x 0.5	11.6	14.4 ± 0.25	0.277	37.1 ± 0.7	289	600/1000	3500	12 584 902
4 X 70	348 x 0.5	11.6	14.4 ± 0.25	0.277	42.8 ± 0.7	381	600/1000	3500	12 585 407
3 X 95	444 x 0.5	13	16 ± 0.3	0.21	41 ± 0.7	366	600/1000	3500	12 584 930

HUBER + SUHNER