

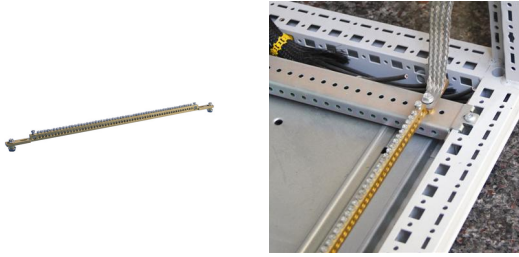

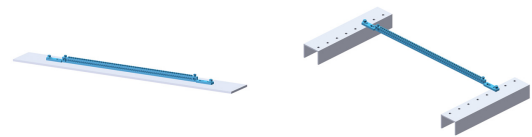


# EB-60 Earthing and Neutral Busbar – EB60 (568661)



ERICO Connecting, Earthing and Neutral Busbars are used to connect several earthing conductors within a panel and can be used in a variety of different applications including switchgear and control equipment, electrical equipment, for wind and solar power generation and in data centers.

- Use to connect several earthing conductors within a panel
- Chamfered holes allow for easy connections
- Mounting slots for universal fixing to copper busbar, directly to rails or spacers
- Rigid bar
- Mounting kits available for stacking busbars or fixing to DIN rail
- RoHS compliant



|                             |  |
|-----------------------------|--|
| Part Number                 | EB60   |
| Article Number              | 568661   |
| Material                    | Brass  |
| Number of Connections       | 60   |
| Conductor Size, IEC         | [1] 16 - 35 mm <sup>2</sup> Stranded<br>[1] 4 - 16 mm <sup>2</sup> Stranded<br>[58] 1.5 - 4 mm <sup>2</sup> Stranded |
| Ferrule Conductor Size, IEC | [1] 10 - 35 mm <sup>2</sup><br>[1] 2.5 - 16 mm <sup>2</sup><br>[58] 0.75 - 4 mm <sup>2</sup>                         |
| Conductor Size, UL          | [1] #6 Stranded<br>[1] #12 - #6 Stranded<br>[58] #16 - #10 Stranded<br>[58] #16 - #10 Solid                          |
| Depth (D)                   | 13 mm  |

|                             |   |
|-----------------------------|---|
| Part Number                 | EB60  |
| Height (H)                  | 13 mm   |
| Width (W)                   | 462 mm  |
| Thickness (T)               | 5 mm  |
| A                           | 376 mm  |
| B                           | 43 mm   |
| X                           | 6.2 x 7 mm  |
| Unit Weight                 | 0.311 kg  |
| Complies With               | IEC® 61439.1  |
| Certifications              | CE<br>cULus<br>EAC 0234268 (Russian Federation)<br>RoHS |
| Standard Packaging Quantity | 1 pc  |
| UPC                         | 78285684499   |
| EAN-13                      | 8711893053685   |

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

**WARNING**

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at [erico.pentair.com](http://erico.pentair.com) and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2016 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.