



nVent ERIFLEX Flexibar Advanced, Tinned Copper - FADV2MTC5X50X1 (534039)

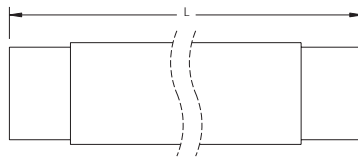

After extensive research, nVent ERIFLEX is proud to establish a new gold standard in terms of insulation for flexible busbar called nVent ERIFLEX Flexibar Advanced. The new product is low smoke, halogen-free and flame retardant all while maintaining the level of flexibility and reliability that our partners have come to expect from nVent ERIFLEX Flexibar. Compared to standard PVC insulation, nVent ERIFLEX Flexibar Advanced does not generate corrosive gases and produces a relatively low smoke opacity in accordance with ISO 5659-2. The low smoke characteristic improves the visibility conditions for people to be able to easily locate the emergency exit and also allows rescue workers to assess an emergency situation more clearly. nVent ERIFLEX Flexibar Advanced means greater safety for individuals, less damage for your electrical equipment and less environmental impact. The halogen-free feature enables a reduction in the quantity of toxic smoke. nVent ERIFLEX Flexibar Advanced does not contain any halogens, according to IEC 60754-1, minimizing toxicity and making it the ideal product for use in enclosed spaces such as data centers, rail and other spaces where people are welcome such as hospitals and schools. This also facilitates the use of nVent ERIFLEX Flexibar Advanced in specific applications such as submarines, switchboards and other enclosed environments that require a low emissions solution. In addition to being halogen-free, nVent ERIFLEX Flexibar Advanced is also compliant with the UL 94-V0 testing standard. The flame retardant portion of the test illustrates the self-extinguish feature. This superior feature of nVent ERIFLEX Flexibar Advanced is also shown by the Limiting Oxygen Index (LOI) at 30%. In case of fire, ERIFLEX Flexibar Advanced generates a limited quantity of smoke that is less damaging to your electrical equipment.

- Thin layers of tinned electrolytic copper formed into a stack
- Full range from 19.5 mm² up to 1200 mm² and 125 A to 2800 A
- Insulated by high-resistance, halogen free, flame retardant and low smoke material with less than 20% contact with conductor for high flexibility
- Easily bent, folded, and twisted, improving assembly flexibility, shortening connections, and decreasing footprint
- Dramatically smaller and more flexible than comparable cable based on ampacity
- Better power density than cable with lower skin effect ratio
- Connections made by punching and bolting directly through the copper laminates or clamping onto the end of the nVent ERIFLEX Flexibar
- No lugs needed, reducing installation time and improving resistance to vibration
- Weight savings and material savings compared to wire alternatives
- Reduces total installation cost
- Traceability codes and designation part numbers printed on insulation
- Conforms to NF EN 45545 obtaining an HL2 classification for chapters R22 and R23
- 100% production dielectric tested
- RoHS compliant



| | |
|------------------------------------|----------------|
| Part Number | FADV2MTC5X50X1 |
| Article Number | 534039 |
| Typical Application Current Rating | 800 A |
| Finish | Tinned |

| | |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Part Number | FADV2MTC5X50X1 |
| Material | Copper Thermoplastic Elastomer |
| Dielectric Strength | 20 kV/mm |
| Flammability Rating | UL® 94V-0 |
| Halogen Free Rating | UL® 2885 IEC® 60754-1 IEC® 62821-1 |
| Low Smoke Rating | IEC® 61034-2 ISO 5659-2 UL® 2885 |
| Smoke, Toxicity and Acidity Rating | IEC® 60754-2 |
| Insulation Elongation | 500 % |
| Insulation Thickness | 1.8 mm |
| Nominal Voltage, UL/CSA/IEC | 1,000 VAC 1,500 VDC |
| Working Temperature | -50 to 115 °C |
| Certification Details | UL® 67 UL® 758 |
| Complies With | IEC® 60695-2-11 (Glow Wire Test 960 °C) IEC® 61439.1 IEC® 61439.1 Class II |
| Length (L) | 2,000 mm |
| ΔT 40 K | 830 A |
| ΔT 50 K | 930 A |
| ΔT 60 K | 1,016 A |
| Conducting Layers (N) | 5 |
| A | 50 mm |
| B | 1 mm |
| Cross Section | 250 mm ² |
| 2 Bar Current Coefficient | 1.72 |
| 3 Bar Current Coefficient | 2.25 |
| Unit Weight | 5.17 kg |
| Certifications | CE CSA 90005 cURus EAC 02941 (Russian Federation) EN 45545-2 CC11618_FADV_IBSADV IEC 60695-2-12 CC10817_FADV IEC 60754-1-2 CC10917_FADV IEC 61439-1 Class II FLEXIBAR_ADV IEC 61439-1 FLEXIBAR_ADV ISO 5659-2 CC11117_FADV RoHS |
| Standard Packaging Quantity | 1 pc |
| UPC | 78285693771 |
| EAN-13 | 0782856937715 |
| EAN-13 (2) | 7090041501188 |
| EL-NUMMER (NO) | 1705939 |

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

ΔT = Temperature of conductors – Internal temperature of panel.

Refer to technical documentation for additional ampacity ratings.

CSA, CSA-US and C-CSA-US are registered trademarks of Canadian Standards Association. IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2018 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.