


ALUMINIUM ENCLOSED SAFETY SWITCHES 16-63A




- IP 66 (IP 67 available)
- Wide operating temperature range
- Good resistance against many chemicals
- Good UV resistance
- Excellent for hard weather conditions
- Padlockable

A2

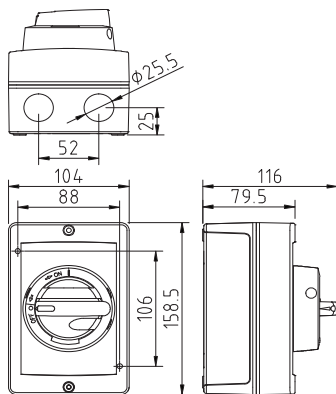

A3

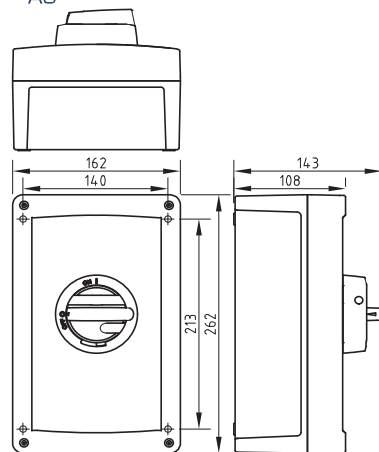

Type	AC-23 / 400V	AC-23 / 690 V	Poles	Enclosure	EAN code 6419410...	E-NO	Weight kg
KUA 316U	20 A / 7,5 kW	20 A / 15 kW	3P	A2	...310007	3600406	0,8
KUA 416U			4P	A2	...310106	3600850	0,9
KUA 616U			6P	A3	...310205	3600408	2,3
KUA 325U	25 A / 11 kW	25 A / 22 kW	3P	A2	...310403	3600416	0,8
KUA 425U			4P	A2	...310502	3600851	0,9
KUA 625U			6P	A3	...310601	3600421	2,3
KUA 332U	32 A / 15 kW	25 A / 22 kW	3P	A3	...310809	3600427	2,0
KUA 432U			4P	A3	...310908	3600852	2,1
KUA 632U			6P	A3	...311004	3600429	2,3
KUA 363U	63 A / 30 kW	40 A / 37 kW	3P	A3	...311202	3600426	2,0
KUA 463U			4P	A3	...311301	3600853	2,1
KUA 663U			6P	A3	...311400	3600425	2,3

Switch delivered with following cable glands:

Type	A	Cable glands	Cable size mm
KUA	16	M25	11-16
	25	M25	11-16
	32	M40	19-27
	63	M40	19-27

ATEX SAFETY SWITCHES 16-125 A



ATEX




- ATEX cable glands included
- Conforming to Directive 2014/34/EU, EN 60079-0 (2012), EN 60079-31 (2014)
- Suitable for use in Zone 22 (Category 3D)
- IP66
- Frontal impact test of 7J
- Operating temperature -20°C - +40°C
- Padlockable

A3EX


A2EX

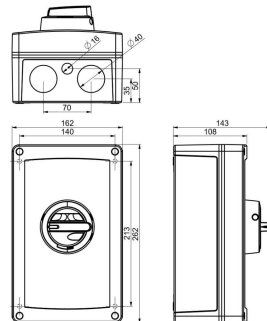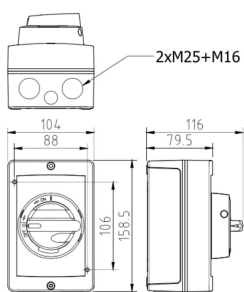


H23EX

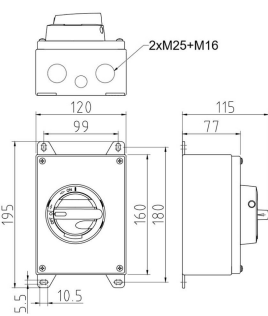

H32EX

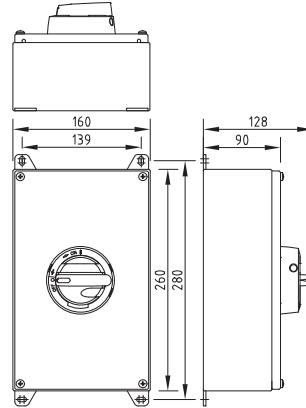

H02EX

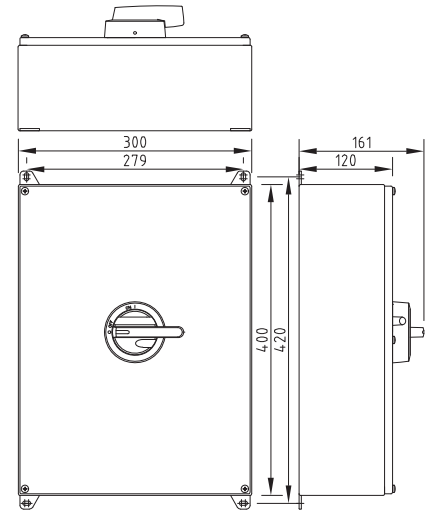

Type	AC-23 / 400V	AC-23 / 690 V	Poles	Enclosure	EAN code 6419410...	E-NO	Weight kg
Aluminium enclosures							
KUA 316U 1.VEX	20 A / 7,5 kW	20 A / 15 kW	3P	A2EX	...305836	3602802	0,8
KUA 332U 1.VEX	32 A / 15 kW	25 A / 22 kW			...305843	3602806	2,0
KUA 363U 1.VEX	63 A / 30 kW	40 A / 37 kW			...305850	3602810	2,0
Stainless steel enclosures							
KUR 316T 1.VEX	20 A / 7,5 kW	20 A / 15 kW	3P	H23EX	...305904	3602804	1,2
KUR 332T 1.VEX	32 A / 15 kW	25 A / 22 kW		H32EX	...305911	3602808	2,3
KUR 363T 1.VEX	63 A / 30 kW	40 A / 37 kW		H32EX	...305928	3602812	2,3
KUR 3125VT 1.VEX	125 A / 55 kW	125 A / 90 kW		H02EX	...305935	3602822	8,5

Switch delivered with following cable glands:

Type	A	Cable glands	Cable size mm
KUA_EX	16	M25	11-16
	32	M40	19-27
KUR_EX	63	M40	19-27
	125	M50	24-35