


DESCRIPTION

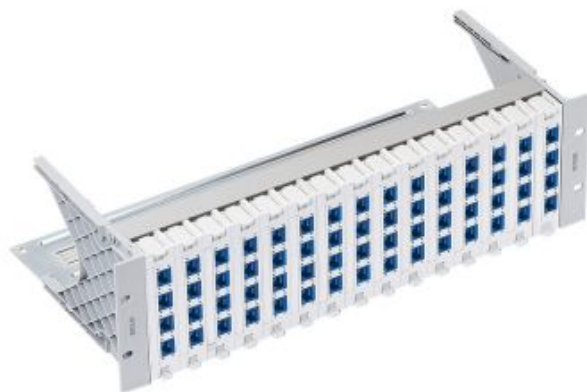

010.2056

SCOPE OF SUPPLY

- 19" 3U Global patch panel/u incl. cable tie shelf
- 15 connection module holders Global/u
- 60 Cat. 6 connection modules, RJ45/u incl. dust covers
- Labeling strips
- 19" mounting kit
- Cable ties
- Installation instructions

TENDER

Connection module holder Global, unshielded, plastic (PC), halogen-free, color light gray (NCS 1005-R80B).

RJ45 connection module of Category 6, for the establishing of transmission channels of class E with up to 4 plugged connections, complies with Category 6 requirements of the standards ISO/IEC 11801, EN 50173-1, (DIN EN 50173-1) as well as TIA/EIA 568.2-D, de-embedded tested in acc. with IEC 60603-7-4, interoperable and backwards compatible with Cat. 5e and Cat. 5.

Suitable for 10GBASE-T applications in acc. with IEEE 802.3™ Section Four up to 500 MHz and 55 m.

Tested on the basis of the R&M production control including 100% routine test.

Compatible with RJ standard plugs (RJ11, RJ12, RJ45), PCB-free and tool-free Easy-Lock connection of installation cables AWG 26 22 (0.4 mm 0.65 mm) and flexible cables AWG 26/7 AWG 22/7. Parallel pair termination without crossover in acc. with TIA 568-A/B, gold-plated bronze contacts for >1000 mating cycles, IDC contacts with single-wire strain relief and >20 insertion cycles, contact resistance <50 mOhm, dielectric strength >1000 Veff. PoE and PoE+ compatible according to IEC 60512-99-001. With integral cable strain relief, including dust cover.

Material: halogen-free and heavy-metal free in acc. with EU directives RoHS 2.

Connection module Cat. 6, unshielded, with dust cover, mounting plate, cable tie and installation instructions.

TECHNICAL DATA











DESCRIPTION	VALUE / VALUE RANGE
Number of connectors (A)	60
Category connector (A)	Cat. 6
Connector type (A)	RJ45
Shielding connector (A)	unshielded
PoE	Yes
Amount of height units	3 U













Rack mounting version	patch panel
Assembly	fully populated
Holder for connector / module	Module holder
Capacity (ports)	60
Standard	IEC 60603-7: Electrical Characteristics of the Telecommunication Outlets ISO/IEC 11801 EN 50173-1 UL Listed
Amount of height units	3 U
Fastening	19 " U

MECHANICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Dimensions	482.6 mm x 132.5 mm x 221.0 mm / 19 in x 5.217 in x 8.701 in (W x H x D)
Color Code NCS	S 2502-B
Material	steel: DC01 (1.0330), 1.5 mm / aluminum / plastic: PA66, PC, fiber-glass reinforced, halogen-free

ACCESSORIES

Type	Picture	Description	Article	E-Number
Optional accessories		Labeling Sheet Fiberliner / 3U Global Mo	R30871	966730495
Optional accessories		Plug Guard RJ45, green	R304825	977901245
Optional accessories		Plug Guard RJ45, red	R304826	977901265
Optional accessories		Plug Guard RJ45, white	R304827	977901215
Optional accessories		Hinged Dust Cover, anthracite	R305685	977901405
Optional accessories		Hinged Dust Cover, blue	R305686	977901425
Optional accessories		Hinged Dust Cover, brown	R305687	977901485
Optional accessories		Hinged Dust Cover, yellow	R305688	977901455
Optional accessories		Hinged Dust Cover, gray	R305689	977901555
Optional accessories		Hinged Dust Cover, green	R305690	977901445

Type	Picture	Description	Article	E-Number
Optional accessories		Hinged Dust Cover, red	R305691	977901465
Optional accessories		Hinged Dust Cover, violet	R305692	977901435
Optional accessories		Hinged Dust Cover, white	R305693	977901415
Optional accessories		Splash Cap IP54, blue	R306058	966907125
Optional accessories		Splash Cap IP54, yellow	R306060	966907155
Optional accessories		Splash Cap IP54, green	R306061	966907145
Optional accessories		Splash Cap IP54, red	R306062	966907165
Optional accessories		Splash Cap IP54, white	R306063	966907115
Optional accessories		19" 1U Cable Management Plastic, 70 mmR306179		966930015
Optional accessories		19" 2U Cable Management Plastic, 70 mmR306180		966930025
Optional accessories		19" Lateral Radius Guard, left and right R306181		
Optional accessories		Plug Reduction Frame RJ45 onto RJ11/R R310835		977990705